SNAPSHOOT
ENGINEERED FOR A SAFER TOMORROW

현장을 이해하고, 필요한 솔루션을 연결합니다.

산업안전 · 추락방지 시스템
산업용 소재 · 건축자재
제품 제안부터 공급·시공·설치·교육까지



COMPANY INFORMATION

스냅슛 (SNAPSHOOT)

ADDRESS (15431) 경기도 안산시 단원구 풍전로 37-9 트리플렉스 301동 118호
TEL 0507-1374-9229
FAX 0504-481-6749
E-MAIL bkkim@snapshoot.co.kr

TECHNICAL DOCUMENTS

인증서 · 데이터시트 · 기술자료

제품의 규격과 성능, 인증 및 적용 조건을 확인하기 위한 자료입니다.

ABOUT SNAPSHOOT

제품 공급을 넘어, 현장에 맞는 해결책으로

스냅슛은 산업현장의 작업 환경과 요구 조건을 바탕으로
적합한 제품과 시스템을 제안합니다. 현장 실사를 통해 설치 조건을 확인하고,
공급부터 시공·설치 및 사용 교육까지 필요한 과정을 함께합니다.

추락방지 시스템

안전대부착설비 · 수평·수직 라이프라인
레일 시스템 · 리지드 포스트

밀폐공간 진입·구조 솔루션

데빗암 · 삼각대 · 구조용 윈치
윈치 안전블록 · 구조장비

산업안전 보호구

전신형 안전대 · 랜야드 · 안전블록
작업 환경에 맞춘 개인보호구

산업용 소재·건축자재

산업용 테이프 · 접착제 · 기능성 소재
구조용 스크류 · 목조건축 자재

SNAPSHOOT
ENGINEERED FOR A SAFER TOMORROW

홈페이지 바로가기 →
문서 라이브러리 바로가기 →
시공사례 바로가기 →
문의하기 →

본 페이지는 스냅슛의 자료 제공 안내용 표지입니다. 첨부된 인증서 및 기술자료의 발행 주체, 인증 대상과 적용 범위는 해당 원문을 기준으로 확인해 주세요.

GENESI®

Fall Protection

Catalogue

Knowing to protect





Innovation, quality, and efficiency: Genesi solutions

1. The Genesi system

The Genesi system 6
The values of Genesi Protection 8
Research & Development 10
Production 11
Genesi partners worldwide 12
Genesi Academy 14
Fall risk 16

2. Collective protection

Guardrail SK-21 24
Guardrail SK-73 46
Allukemi Step gangway 66

3. Fall protection devices


Vertical X 2.0 lifeline 76
Caged ladders 82
LadderCrab-I ladder 84
Anchor points 88
Trilob lifeline 98
Libera lifeline 108
Exagon lifeline 120
Allukemi Plus lifeline 130
Special supports 140
Alux Rail system 144
AluxCrab system 152
AluxCrab V system 160

4. Accessories

Installation equipment 164

The journey of Somain Italia continues with Genesi: Knowing to Protect

We embarked on our journey with Somain Italia over 20 years ago, carrying forward a vision: to be the arm that saves lives and protects the dreams of those who work. This vision, nurtured by values such as the centrality of human life, a passion for innovation, and a commitment to spreading a culture of safety, has marked our growth and development.

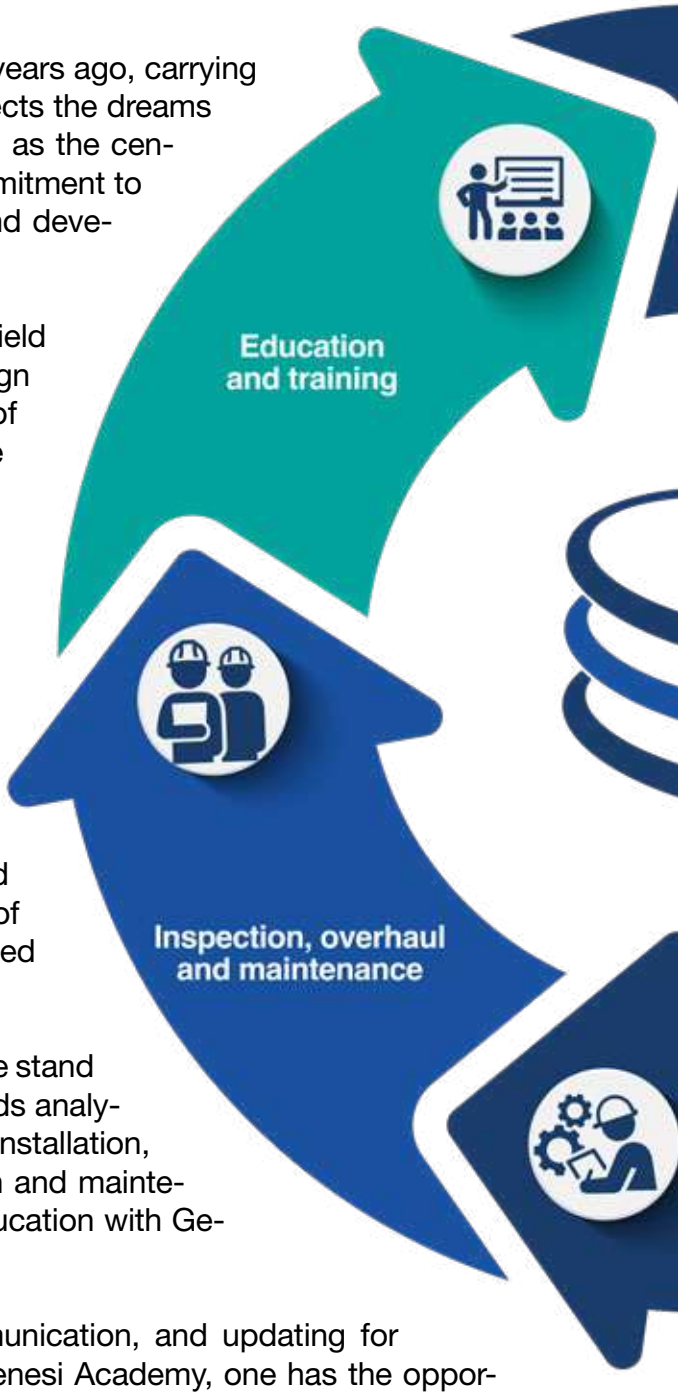

Over time, we have gained extensive experience in the field of workplace safety, becoming a benchmark for the design and implementation of solutions that protect the lives of people working at height or in confined spaces. We have always supported the fundamental right to work safely and have committed ourselves to ensuring that all workers can return home safe and sound every day.

Our mission has evolved over time, leading to the creation of Genesi, a group of people that represents the sum of the experiences, skills, and professionalism we have acquired over the years.
Genesi was born from the desire to redefine customer centrality, responding to their needs with innovative and high-quality solutions. With commitment, enthusiasm, and a spirit of innovation, we have embraced the challenge of constantly improving the safety of those working in confined spaces and at height.

Genesi is not just a manufacturer of protective devices; we stand by our clients during the consultancy phase through needs analysis and risk assessment, solution definition, design and installation, ensuring full efficiency of the devices through inspection and maintenance, and caring for people by offering training and education with Genesi Academy.

Genesi Academy is the epicenter of interaction, communication, and updating for anyone working at height and in confined spaces. At Genesi Academy, one has the opportunity to explore the most suitable solutions for all needs and situations, acquiring the theoretical and practical skills necessary to safely face any scenario. The proposed solutions stem from competence and passion with a fundamental mission: to protect human life. Genesi Academy pursues

this goal by spreading knowledge through a widespread network of training centers across the territory, ensuring the same high-quality standard of the courses offered everywhere. The Genesi Academy training center is IRATA certified, an unmistakable mark of excellence in rope work. This is complemented by three international certifications that define the company's identity: ISO 9001 confirms the adoption of a high-level quality management system; ISO 14001 represents environmental responsibility and a concrete commitment to reducing the impact of activities carried out; ISO 45001 establishes dedication to workplace safety, based on risk identification and the implementation of preventive measures that ensure the continuous improvement of the health and safety of collaborators and all involved parties.



Genesi produces a range of cutting-edge products that utilize IoT technology to ensure continuous connectivity and detailed real-time information. These devices, integrated with consulting services, NFC tags, training, and support, are designed to assist partners and clients in managing and preventing workplace accidents. Genesi represents the evolution of Somain Italia: a renewed promise, rooted in twenty years of experience and aimed at the constant pursuit of excellence. It is an environment where teamwork, shared goals, and values make a difference. A place of continuous growth, where new opportunities and technologies are discovered thanks to an insatiable thirst for innovation.

Welcome to this new era, the era in which Somain brings Genesi to life.



The values of Genesi Protection

Vision

To be the voice that spreads knowledge
and conveys the ability to face every work challenge
with maximum protection.

Mission

Designing and implementing solutions that integrate training,
services and products to protect people‘s lives.
Spreading the culture of the right to safety so that working people
can return home safe and sound every day.

Skills

Being constantly updated, trained, and ready to respond to the needs of our clients quickly and comprehensively. Fulfilling one's duties and sharing experiences, promoting rational and constructive criticism.

Reliability

Consistently meet commitments by knowing how to organize and complete your work with punctuality and precision. Perform your duties while respecting roles, rules, objectives, methods, and processes.

Communication

Knowing how to listen and ask questions, give and request feedback. Knowing how to share information clearly and concisely, choosing an effective and appropriate method.

Respect

Safeguard the company's assets and defend our strategic choices, taking care of people, their ideas, needs, and also their time.


Sustainability

Knowing how to change one's habits by using resources, investments, and technological integration to enhance not only current potential but also future potential. Meeting the needs of the present generation without compromising the ability of future generations to fulfill their own. Supporting the well-being of workers by promoting their training, organizing inclusive activities with the aim of integration. Protecting the environment through small and large daily actions by reducing waste and enhancing the value of consumable and production materials.

Innovation

Set ambitious goals and be forward-thinking. Seek new milestones and overcome difficulties to continue growing. Know how to temporarily eliminate our habits to go beyond customer needs. Seek improvement to continue ensuring high levels of quality. Leave nothing to chance.



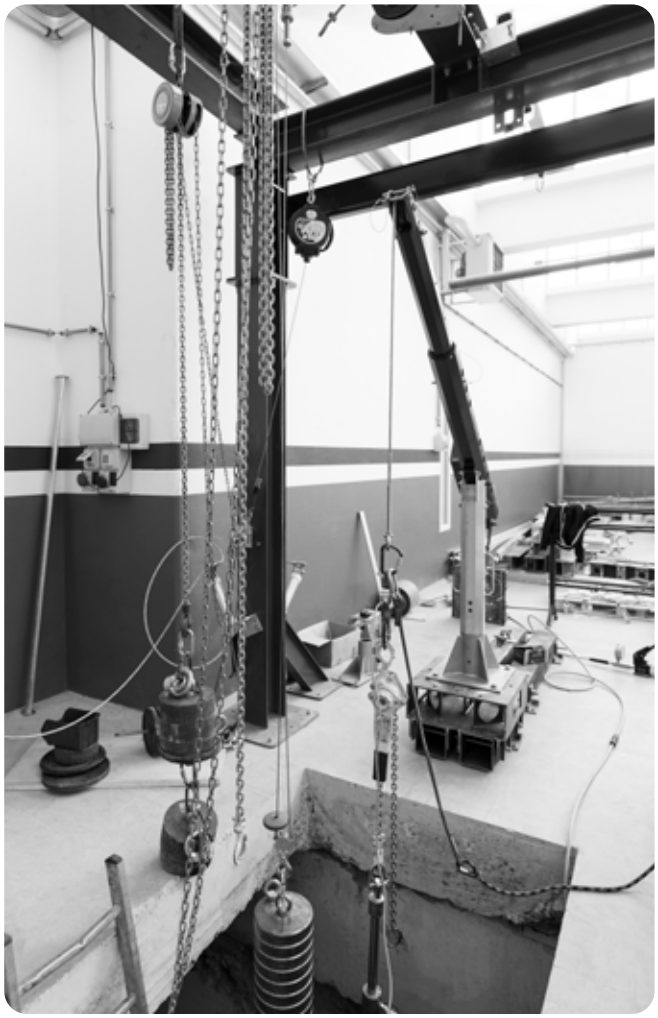

R&D

The Research and Development department and the Technical Office are constantly engaged in the design and implementation of new safety devices in compliance with industry regulations. The ability to provide innovative solutions in an increasingly complex and ever-changing context is essential to ensure the highest level of protection and ergonomics. The design involves a careful evaluation of construction materials and finishes to ensure structural resistance and resistance to external agents, sustainability, and lightness. Particular attention is paid to ease of transport, installation, and use. Each device is conceived with a high level of attention to detail.

To achieve these results, Genesi uses cutting-edge specific software and an area of 1500 m^2 dedicated to internal testing. Here, the devices undergo rigorous tests with standards higher than those imposed by industry regulations. Subsequently, the products are tested at independent third-party laboratories and approved by a notified body. Quality and reliability are an absolute priority to ensure the full protection of operators working in confined spaces and at height.

Production

The Production department collaborates daily with Research and Development and the Technical Office to develop devices and define the best assembly, control, and release procedures for the products. All Genesi devices are equipped with NFC tags to ensure traceability, allowing the end user to access up-to-date documentation in real-time via tablet or smartphone.

The Lean philosophy does not represent a goal, but a process of continuous improvement. The production department is organized according to these principles, employing modern equipment to work, process, and mark metals, and adopting cutting-edge processes to reduce waste and optimize efficiency.

The warehouse is structured to promptly meet the demands for standard products and to manage on-demand needs quickly and effectively, thanks to a large stock of finished and semi-finished products of mobile anchoring devices for confined spaces and personal and collective fall protection systems. Constant innovation allows these departments



to keep pace with the needs of an ever-evolving market, ensuring increasingly effective solutions for worker safety.



Genesi partners worldwide



In an increasingly globalized world, looking beyond national borders means creating synergies that allow for the merging of complementary skills to enhance the culture of safety, consistently ensuring the quality of projects and installations worldwide.
All Genesi solutions are designed to meet the needs of European and non-European markets, adapting to the regulatory and cultural specificities of each territory. For this reason, the network of selected distributors who share the company's values, objectives, and common vision is fundamental. The map, continuously updated, highlights the presence of all Genesi partners worldwide.


ACCESSO
IN QUOTA
PORTWEST


ACCESSO
IN QUOTA


ACCESSO
IN QUOTA
SAFETY



Genesi Academy
Knowledge that protects

Genesi Academy aims to spread the culture of safety to all workers. This is our mission, a motivation fueled by the founding values of Genesi and strengthened by the expertise of engineers, technicians, installers, and expert high-altitude workers, combined with the experience of Irata International certified technicians.

In what way?
How? Genesi Academy has developed a comprehensive and diversified training offer of courses for those who perform activities at height and in confined spaces, designed to accompany trainees along a growth path that can take them from the first basic notions to the ability to manage one or more work teams in any situation, including emergencies. We are able to train and best prepare operators employed in work at height and in confined spaces and qualify personnel for installation and maintenance to ensure compliance with current local legislation and technical reference standards. Genesi Academy is able to deliver its courses directly at the client's site, operating in real scenarios or through a specially equipped vehicle (GAM - Genesi Academy Mobile). Genesi Academy can rely on a state-of-the-art training center at its headquarters capable of reproducing countless scenarios and certified by IRATA International for suspended work. Additionally, in Italy, it has affiliated a series of training centers that guarantee the same high-quality standard.









Fall risk

Fall Risk For over 20 years, Genesi has been protecting operators at risk of falling by researching the best protective solution, taking into due consideration, among other parameters, the geometry of the work environment and the ergonomics of the solution itself.

For Genesi, protecting operators from fall risk means designing, certifying, producing, installing, and maintaining fall protection systems while adequately training workers.

The ideal fall protection solution is one that prevents the operator from falling by using collective protection systems and devices that eliminate fall risk, such as guardrails, walkways, and overpasses.

If eliminating the risk is not possible, it is necessary to individually protect the operator by using personal protective equipment and designing the system to prevent falls: a restraint system.

If the type of activity does not allow working in restraint, the system must be designed to cushion the effects of a fall, preventing the worker from impacting the surface and mitigating the effects of the stop: a fall arrest system.



Genesi systems

The Genesi systems for collective and individual protection are robust, ergonomic, easy to install and use.
Approved by third-party entities, thanks to their modularity and wide range of supports, they adapt to the most varied geometries of the structure to be secured.

The adaptability and design that characterize our solutions, combined with compact forms and low visual impact, allow Genesi systems to integrate perfectly into the installation context, making them ideal in buildings with high historical or aesthetic value.

To support our systems, we have developed Genesi DNA, the integrated management software that allows access to all relevant information related to the systems and to keep track of deadlines. No more printed paper for device management but a digital platform to archive and organize periodic inspection and maintenance operations.

Features

- Modularity
- Lightness
- Ease of installation
- Noble raw materials
- Robustness
- High durability
- Simplified design
- Context adaptability
- Ergonomics
- Compliant with national and international legislation
- Approved by third-party entities
- Insurance coverage
- Design
- Low visual impact
- Traceability



Walkway on roof



Loading bays



Roof access

Contents

Gangways
p. 66

Lifelines
p. 96

Anchor points
p. 88

Alux Rail system
p. 144


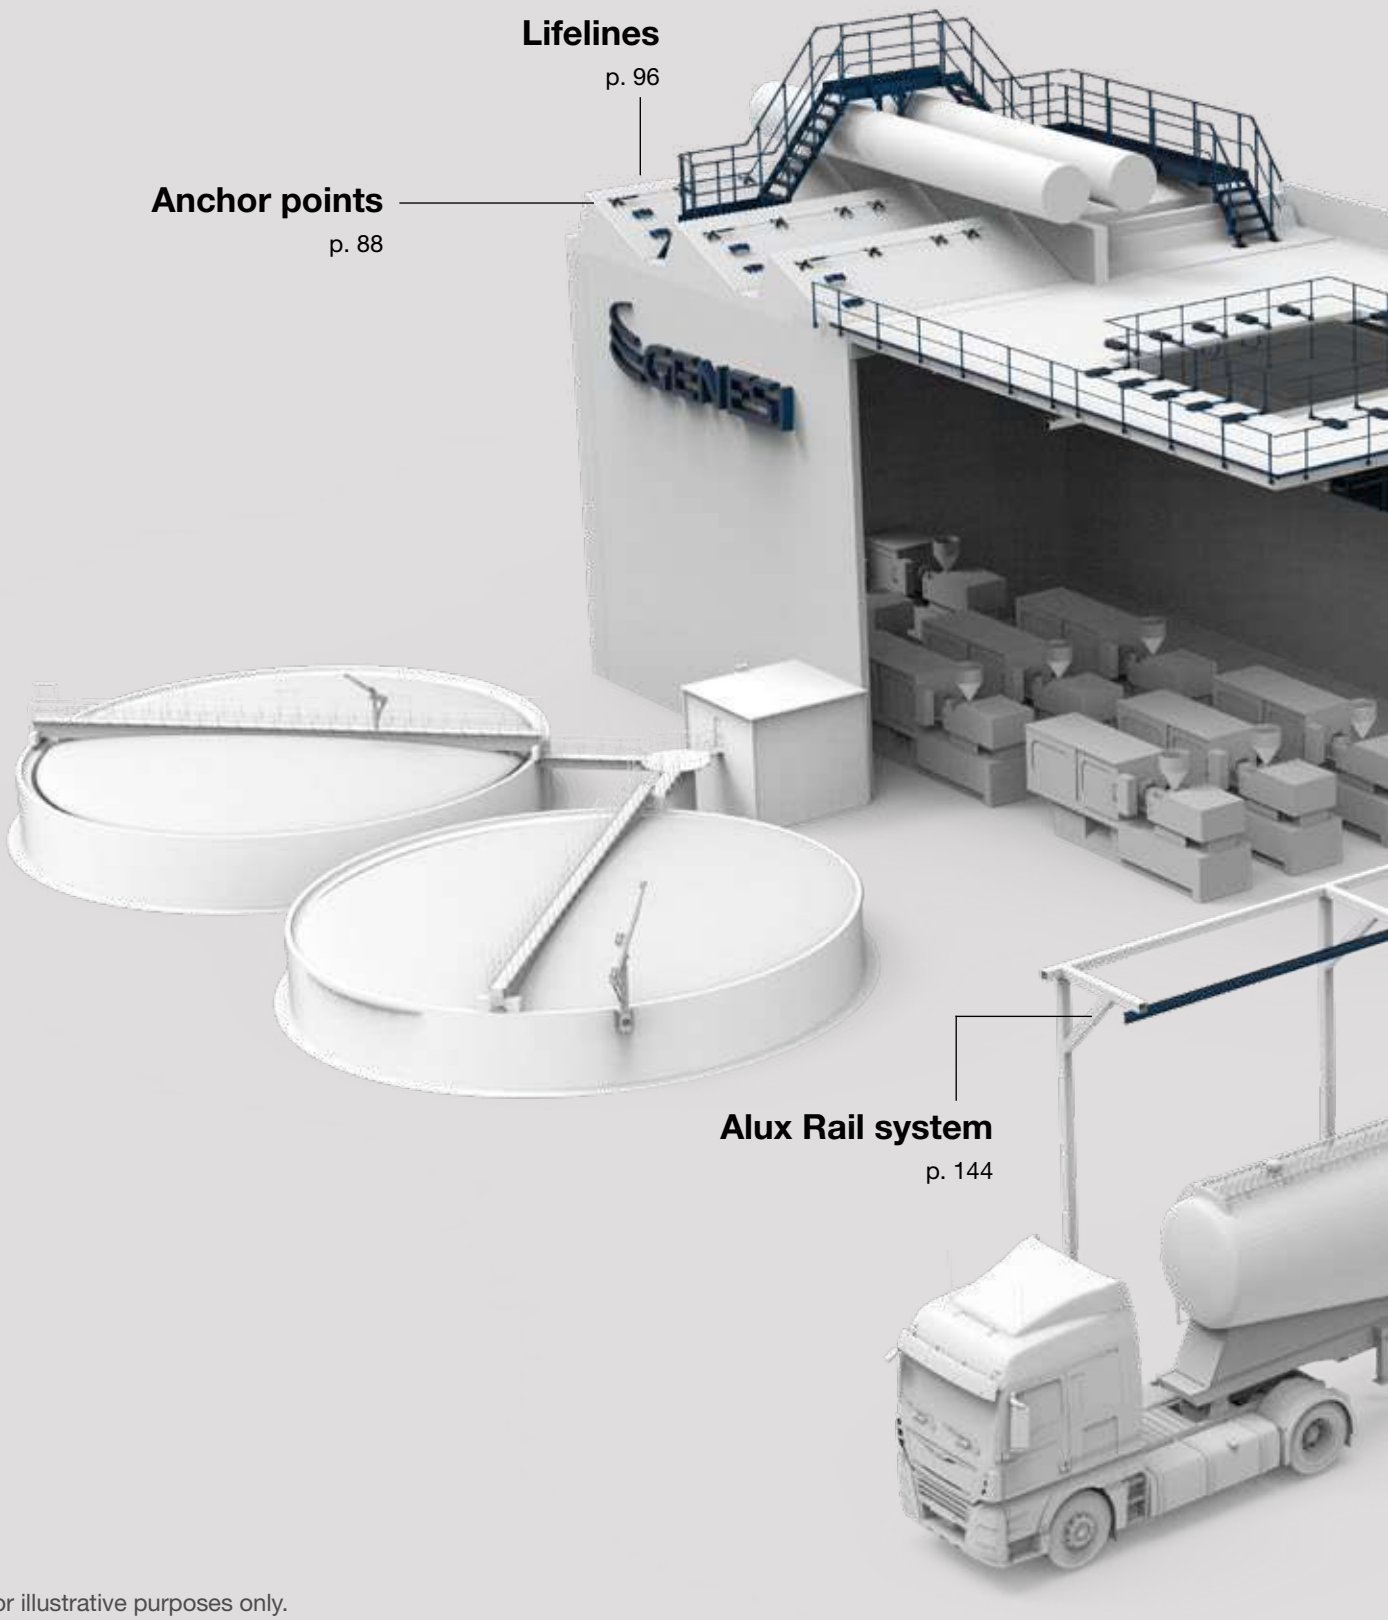


Image for illustrative purposes only.


Guardrails
p. 22
LadderCrab-I ladder
p. 84
AluxCrab V system
p. 160
AluxCrab system
p. 152
Caged ladders
p. 82
Vertical X 2.0 lifeline
p. 76


Collective protection



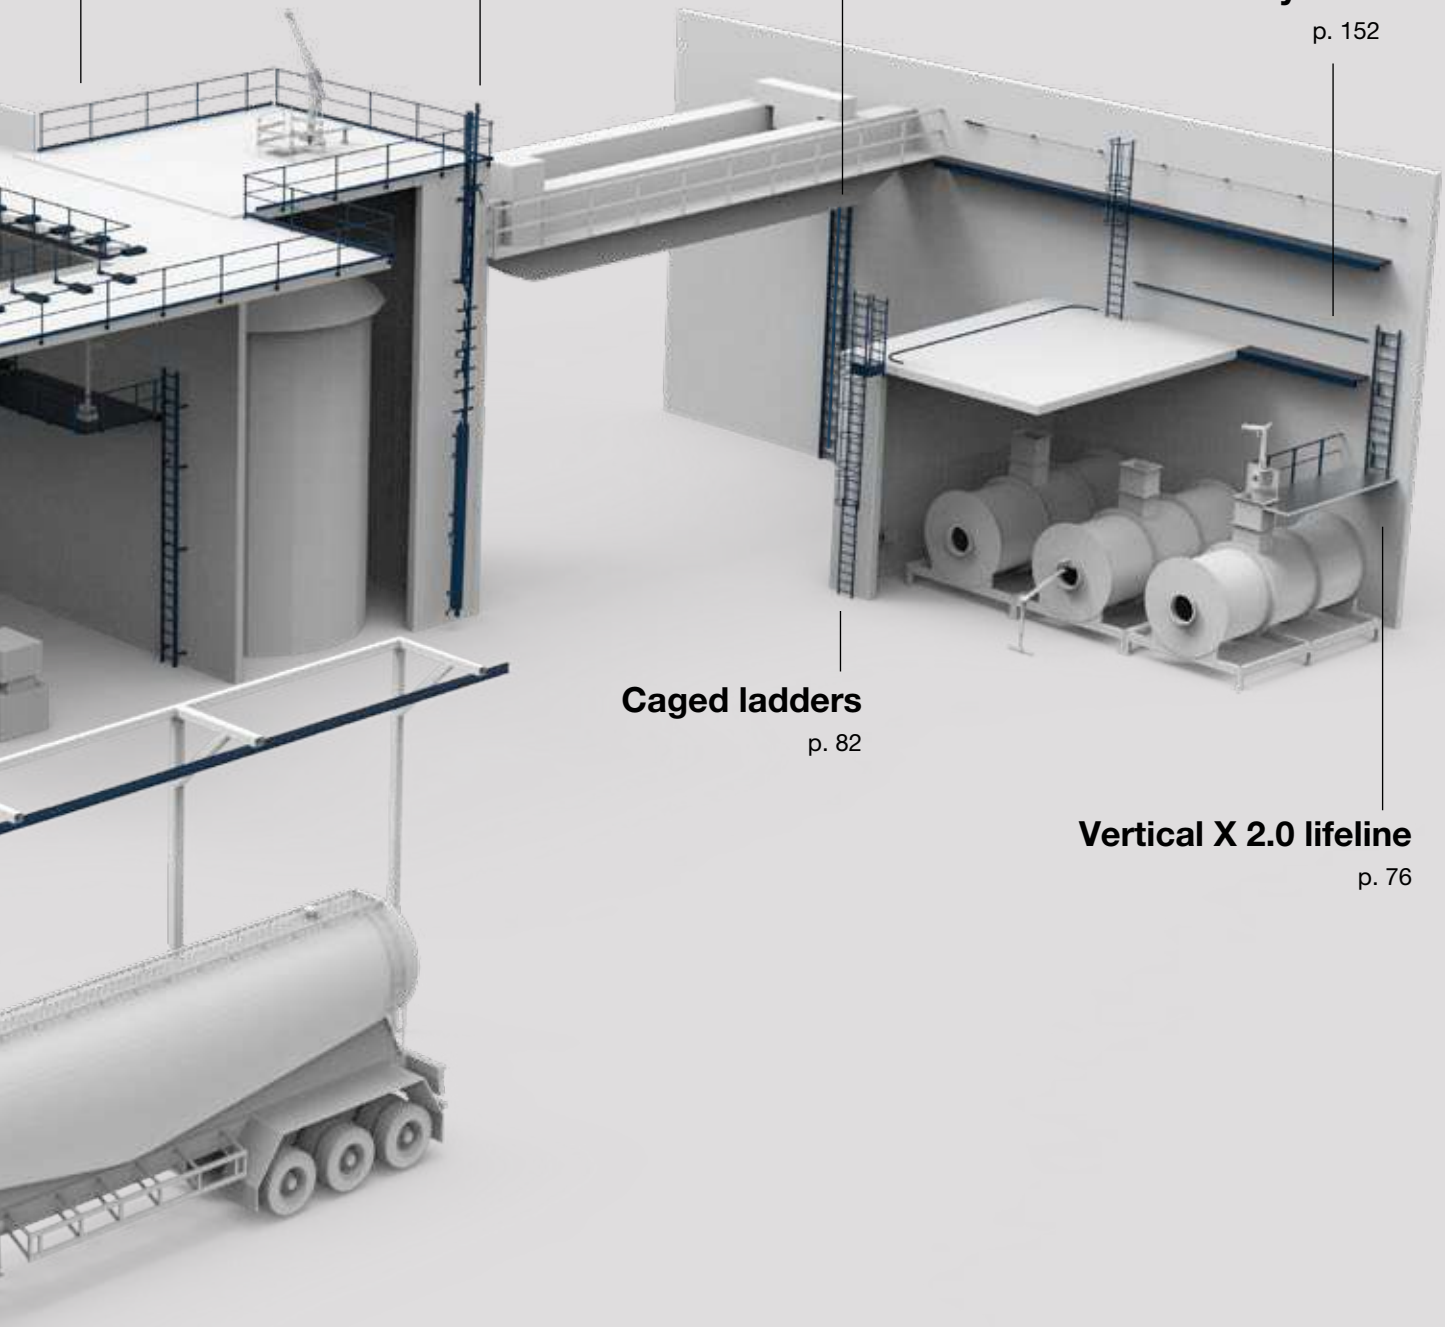

Custom solutions: guardrails



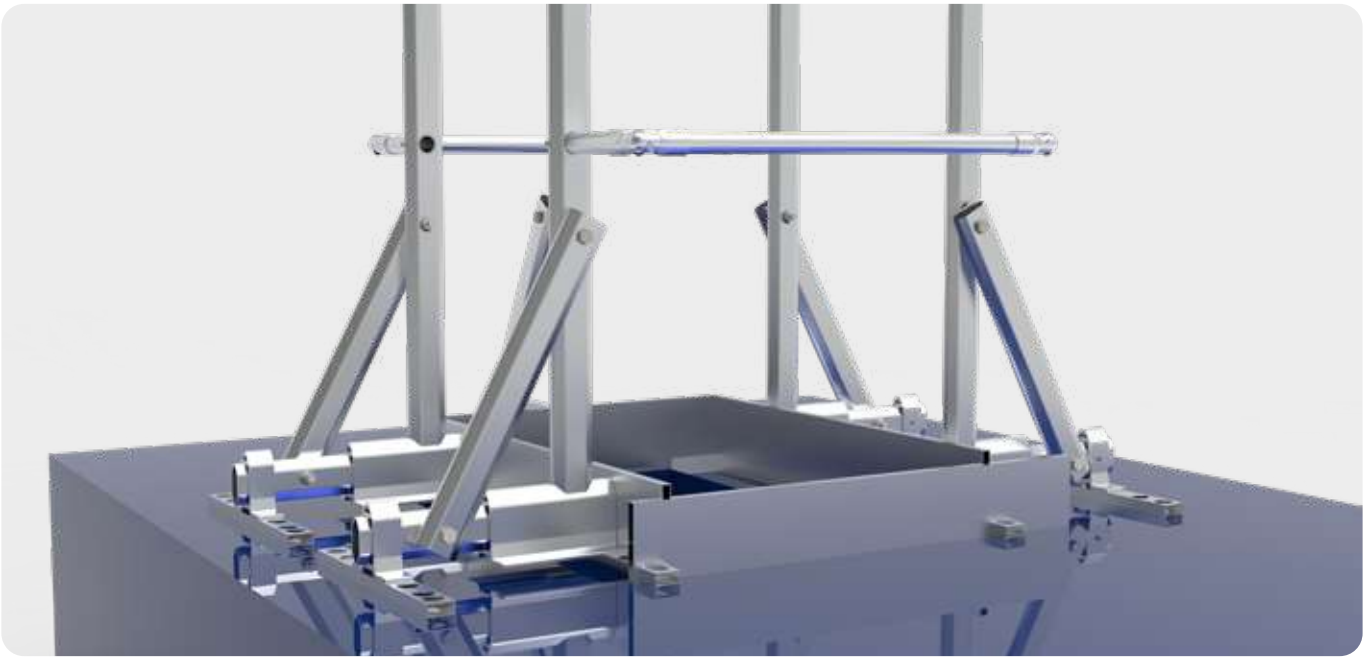

The Genesi guardrails are versatile and modular, capable of providing the ideal solution for any workplace exposed to the risk of falling from heights.
Entirely made of aluminium alloy, the profiles and components of the Genesi guardrails are designed to ensure lightness, solidity, and great ease of installation while considering aesthetic value.

The Genesi guardrails are available in straight, inclined, or reclining versions to reduce visual impact and with various fixing methods to ensure total application flexibility during the project phase.
All Genesi guardrails comply with the EN ISO 14122-3:2016 standard. Some models and configurations also meet the EN 13374:2019 and NTC 2018 Category H standards.





Guardrail SK-21

The SK-21 guardrails were developed from the need to adapt our historical guardrail to the evolution of industry standards and from the strong desire to create a versatile and modular guardrail capable of providing maximum collective protection in the application areas of all technical standards and industry legislation: EN ISO 14122-3:2016, EN 13374:2019, and NTC 2018 category H.

The Genesi SK-21 guardrails are available in more than 20 different types to adapt to safe installation on specific roofs and structures. The different types are characterized by specific configurations of the constituent components, fixing methods, and supports.

Genesi offers guardrails for wall or floor installation, freestanding or for metal structures, up to special reclining guardrails.

Most configurations are available with straight and inclined uprights to optimize the visual impact of collective protection and can be treated or painted to increase resistance in particular environments or simply to better integrate into the aesthetics of the structure.



Features

- Lightness and strength
- Maximum distance between uprights 2 m (except for some configurations)
- Complete range for every installation need
- Custom design of supports
- High modularity and versatility
- Simplicity and speed of installation
- Possible customization of finishes
- Concrete counterweights without plasticization and made with partially recycled materials for greater sustainability
- High durability
- Use of noble raw materials




Compliance

- EN ISO 14122-3:2016
- EN 13374:2013+A1:2018 Class A
- NTC 2018 Category H

Guardrail SK-21

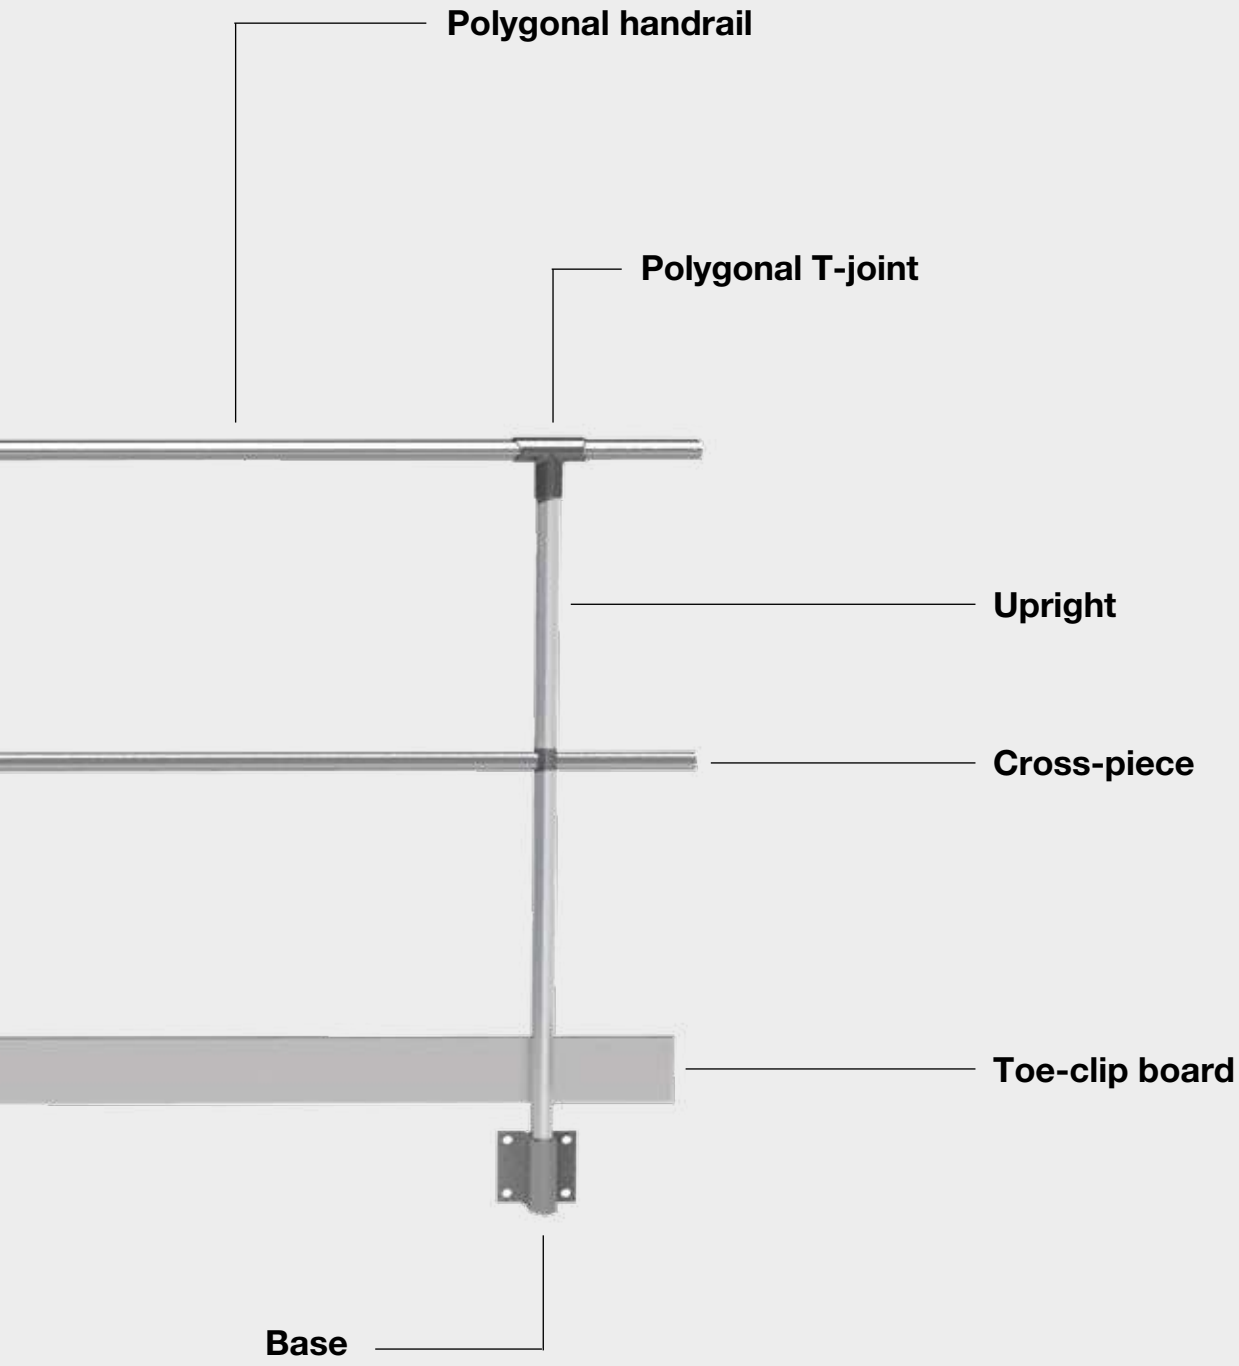


Polygonal handrail
Polygonal T-joint
Upright
Cross-piece
Toe-clip board
Base

Straight guardrail
Wall fixing

Compliance

- EN ISO 14122-3:2016
- EN 13374:2019 Class A
- NTC 2018 Category H



Cod. 361-3030-1000
SKMD1-21



Guardrail for structures with a wall of more 60 cm.
Composition:
- Uprights
– Handrail

Cod. 361-3030-2000
SKMD2-21




Guardrail for structures with a wall from 10 to 60 cm.
Composition:
- Uprights
- Handrail
- Intermediate cross-piece

Cod. 361-3030-3000
SKMD3-21



Guardrail for structures with a wall of less than 10 cm.
Composition:
- Uprights h ≤ 125 cm
- Handrail
- Intermediate cross-piece
– Toe-clip board

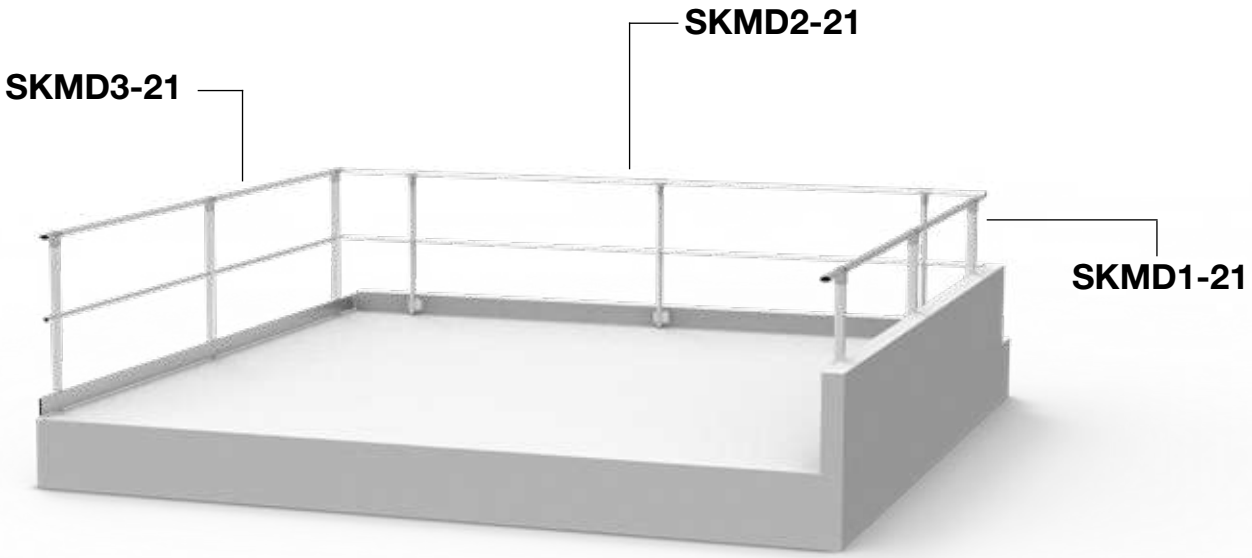
SKMD2-21
SKMD3-21
SKMD1-21





Inclined Guardrail
Wall fixing

Compliance

- EN ISO 14122-3:2016
- EN 13374:2019 Class A
- NTC 2018 Category H



Cod. 361-3040-1000
SKMI1-21



Guardrail for structures with a wall of more 60 cm.
Composition:
- Uprights
– Handrail

Cod. 361-3040-2000
SKMI2-21




Guardrail for structures with a wall from 10 to 60 cm.
Composition:
- Uprights
- Handrail
- Intermediate cross-piece

Cod. 361-3040-3000
SKMI3-21



Guardrail for structures with a wall of less than 10 cm high.
Composition:
- Uprights h ≤ 125 cm
- Handrail
- Intermediate cross-piece
– Toe-clip board

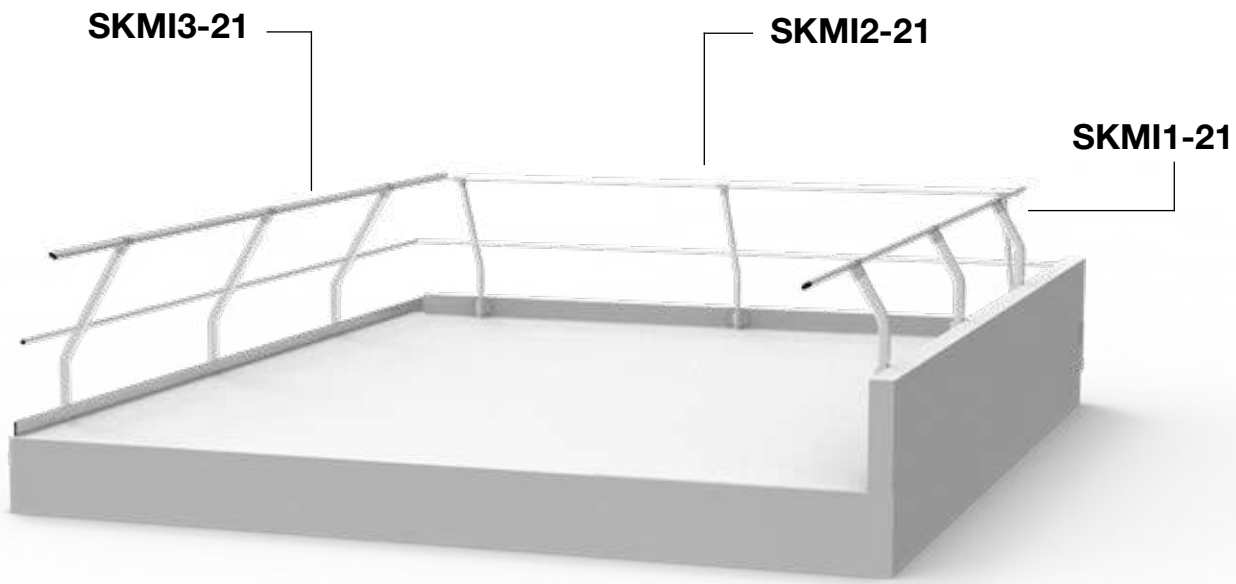
SKMI3-21
SKMI2-21
SKMI1-21



Straight guardrail
Protruding wall fixing

Compliance

- EN ISO 14122-3:2016
- EN 13374:2019 Class A
- NTC 2018 Category H



Cod. 361-3120-1000
SKSD1-21



Guardrail for structures with a wall of more 60 cm, with protruding fixing.
Composition:
- Uprights
– Handrail

Cod. 361-3120-2000
SKSD2-21




Guardrail for structures with a wall from 10 to 60 cm, with protruding fixing.
Composition:
- Uprights
- Handrail
- Intermediate cross-piece

Cod. 361-3120-3000
SKSD3-21



Guardrail for structures with a wall of less than 10 cm high, with protruding fixing.
Composition:
- Uprights h ≤ 125 cm
- Handrail
- Intermediate cross-piece
– Toe-clip board

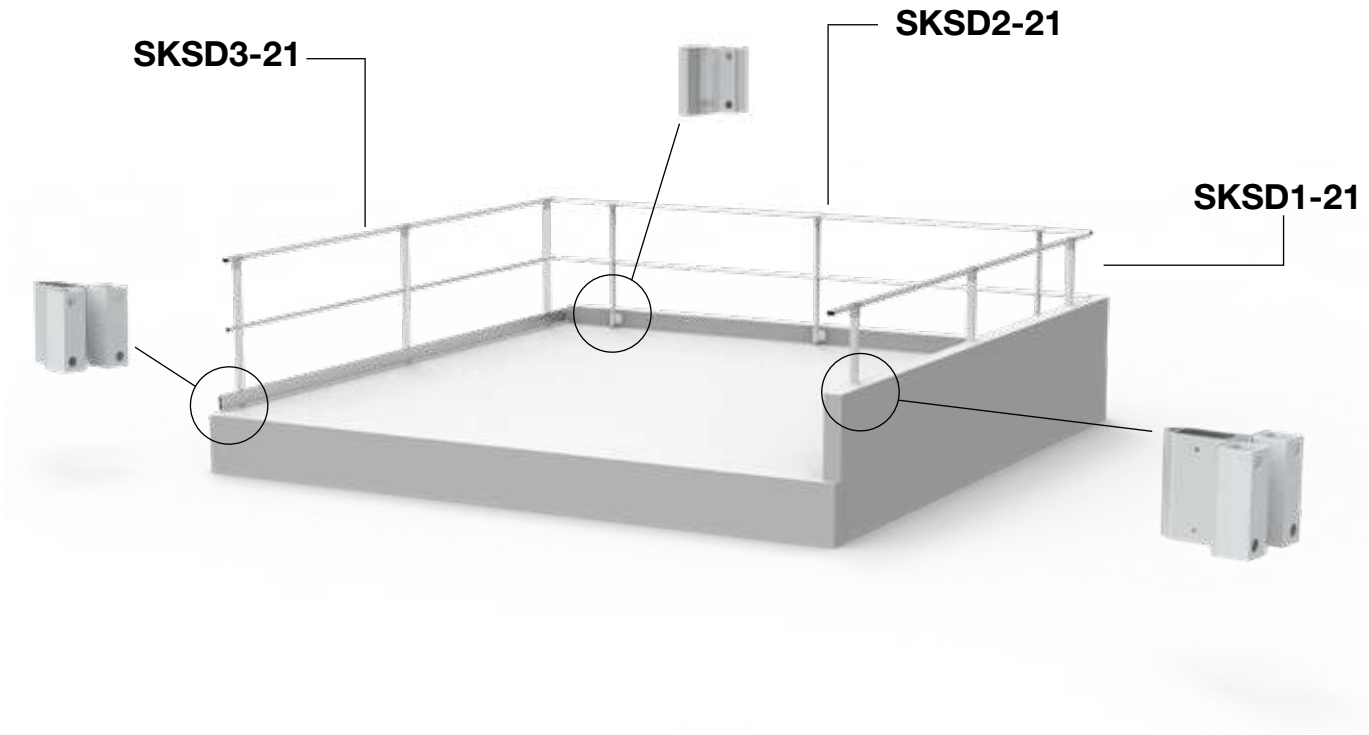
SKSD3-21
SKSD2-21
SKSD1-21





Inclined guardrail
Protruding wall fixing

Compliance

- EN ISO 14122-3:2016
- EN 13374:2019 Class A
- NTC 2018 Category H



Cod. 361-3130-1000
SKSI1-21



Guardrail for structures with a wall of more 60 cm, with protruding fixing.
Composition:
- Uprights
– Handrail

Cod. 361-3130-2000
SKSI2-21




Guardrail for structures with a wall from 10 to 60 cm, with protruding fixing.
Composition:
- Uprights
- Handrail
- Intermediate cross-piece

Cod. 361-3130-3000
SKSI3-21



Guardrail for structures with a wall of less than 10 cm high, with protruding fixing.
Composition:
- Uprights h ≤ 125 cm
- Handrail
- Intermediate cross-piece
– Toe-clip board

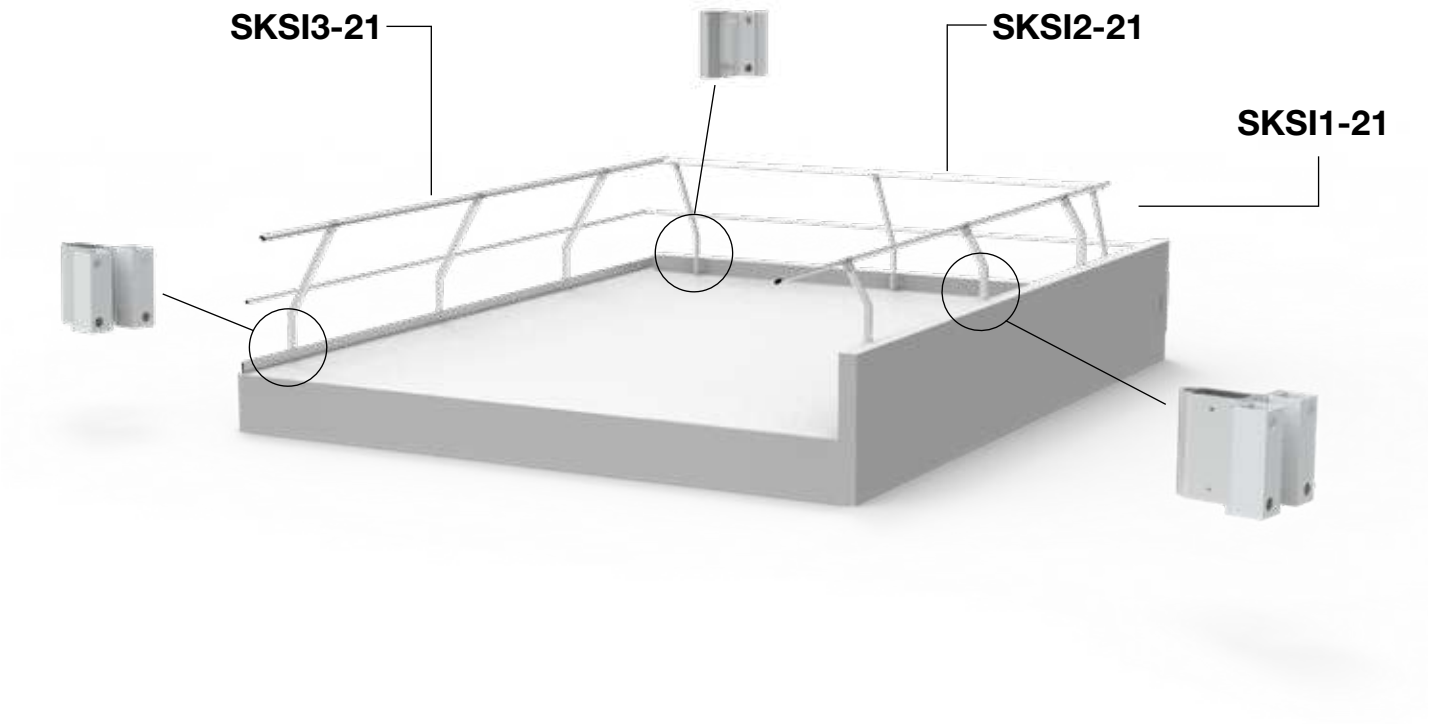
SKSI3-21
SKSI2-21
SKSI1-21





Straight guardrail
Floor fixing

Compliance

- EN ISO 14122-3:2016
- EN 13374:2019 Class A
- NTC 2018 Category H



Cod. 361-3060-1000
SKPD1-21



Guardrail for structures with a wall of more 60 cm.
Composition:
- Uprights
– Handrail

Cod. 361-3060-2000
SKPD2-21




Guardrail for structures with a wall from 10 to 60 cm.
Composition:
- Uprights
- Handrail
- Intermediate cross-piece

Cod. 361-3060-3000
SKPD3-21



Guardrail for structures with a wall of less than 10 cm high.
Composition:
- Uprights h ≤ 125 cm
- Handrail
- Intermediate cross-piece
– Toe-clip board

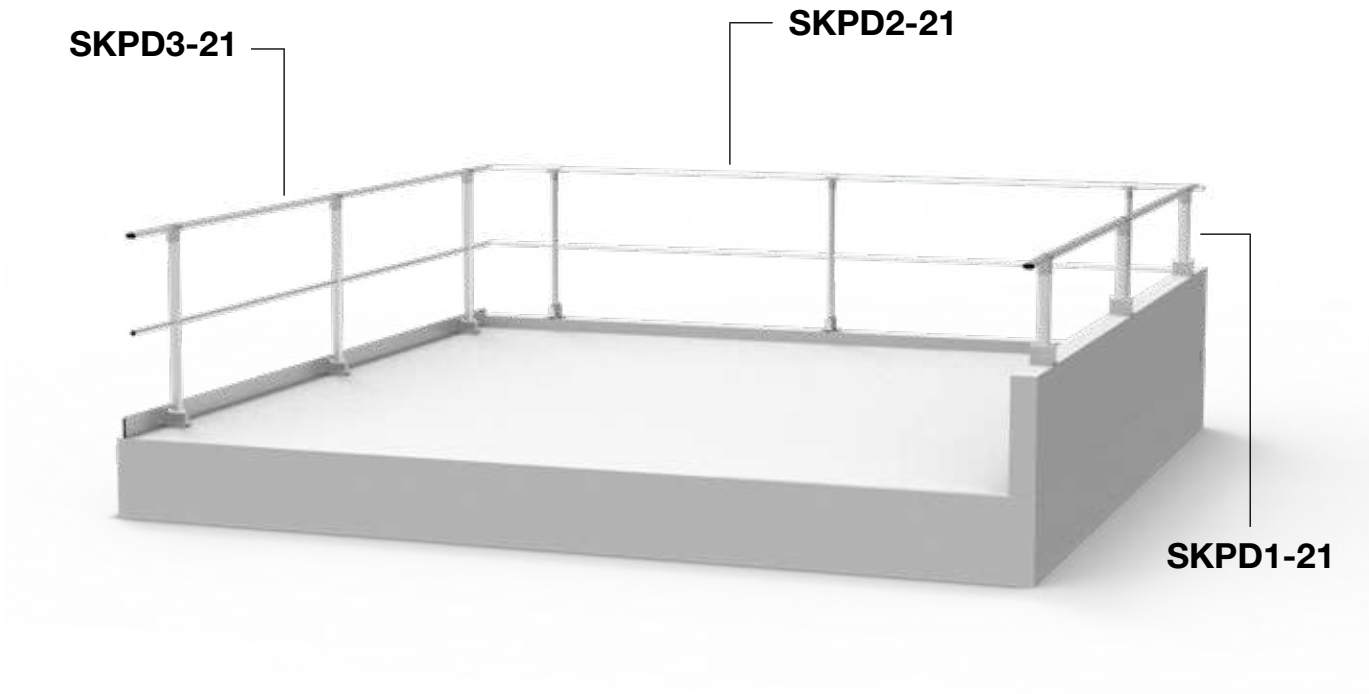
SKPD3-21
SKPD2-21
SKPD1-21





Inclined guardrail
Floor fixing

Compliance

- EN ISO 14122-3:2016
- EN 13374:2019 Class A
- NTC 2018 Category H



Cod. 361-3070-1000
SKPI1-21



Guardrail for structures with a wall of more 60 cm.
Composition:
- Uprights
– Handrail

Cod. 361-3070-2000
SKPI2-21




Guardrail for structures with a wall from 10 to 60 cm.
Composition:
- Uprights
- Handrail
- Intermediate cross-piece

Cod. 361-3070-3000
SKPI3-21



Guardrail for structures with a wall of less than 10 cm high.
Composition:
- Uprights h ≤ 125 cm
- Handrail
- Intermediate cross-piece
– Toe-clip board

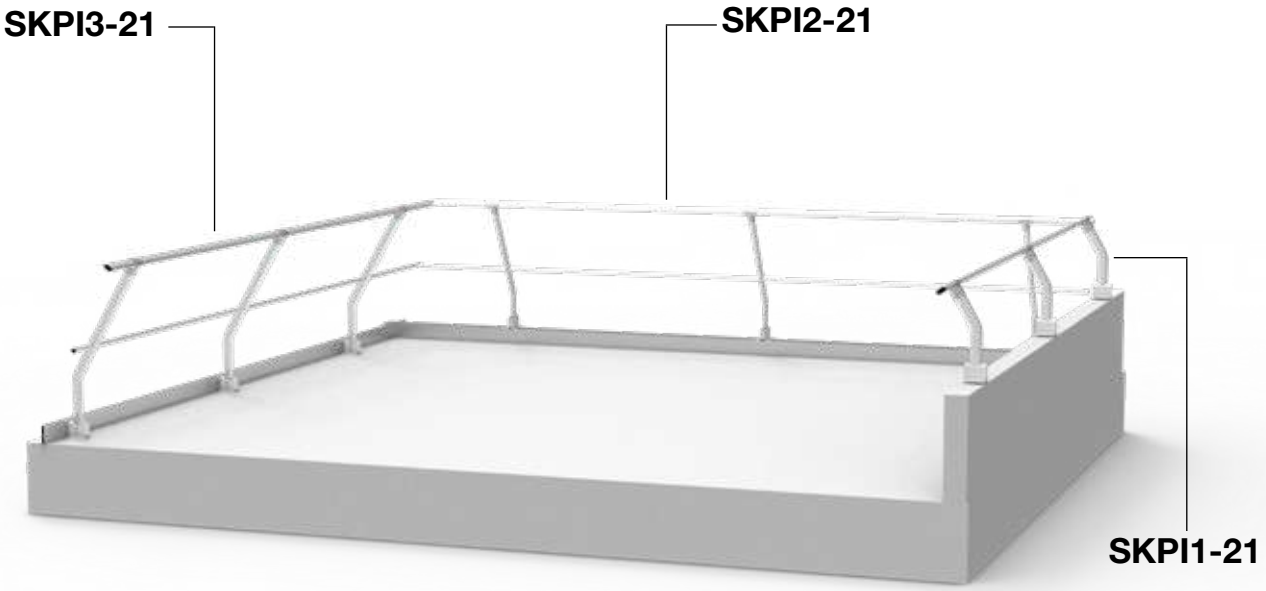
SKPI3-21
SKPI2-21
SKPI1-21






Reclinable guardrail
Floor or wall fixing

Compliance

- EN ISO 14122-3:2016
- EN 13374:2019 Class A

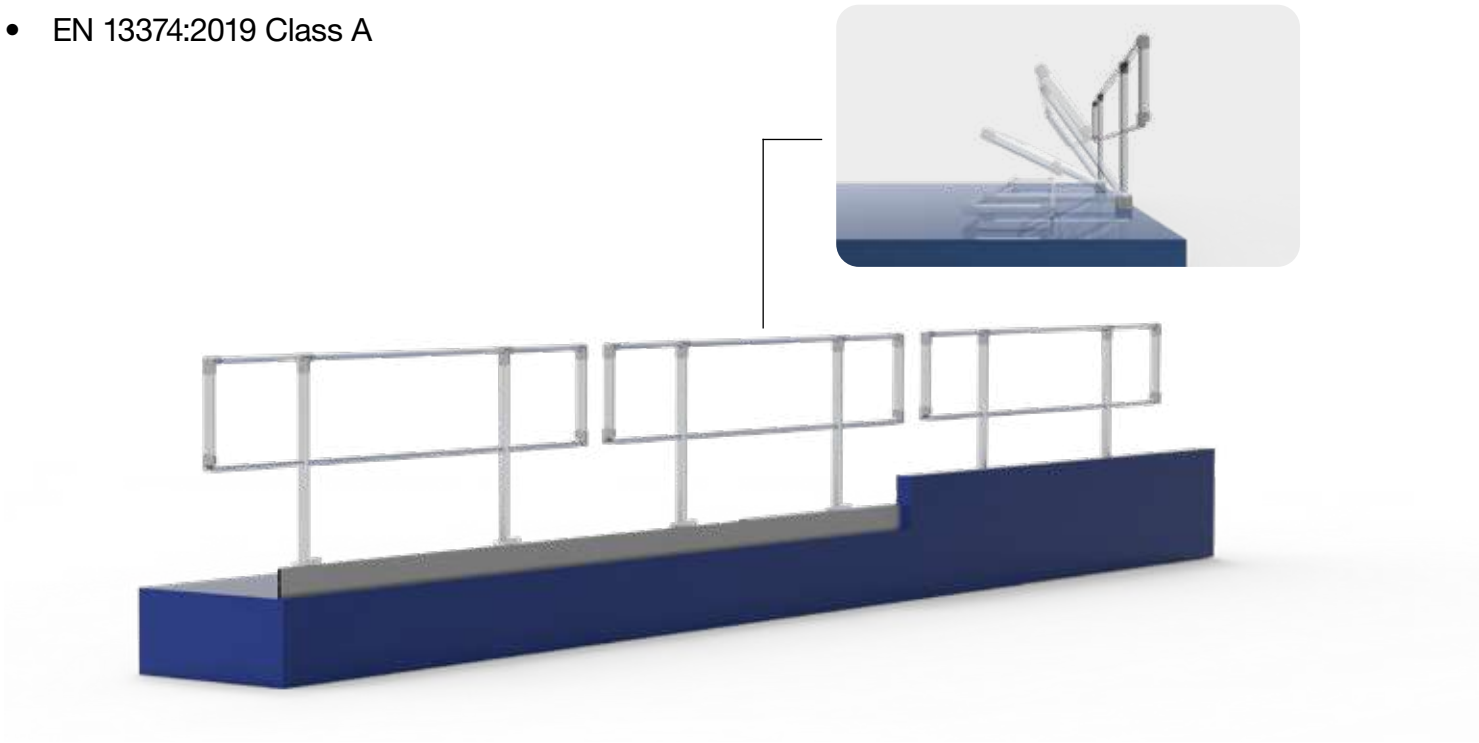

Cod. 361-3080-1000
SKRD-21-P




Reclinable Guardrail with Toe-clip Board. Suitable for structures with a wall height of less than 15 cm.
Composition:
- Uprights
- Handrail
- Intermediate cross-piece
– Toe-clip board 3 m modules

Cod. 361-3050-1000
SKRD-21-M



Reclinable Guardrail without Toe-clip Board. Suitable for structures with a wall height from 15 to 60 cm.
Composition:
- Uprights
- Handrail
- Intermediate cross-piece 3 m modules

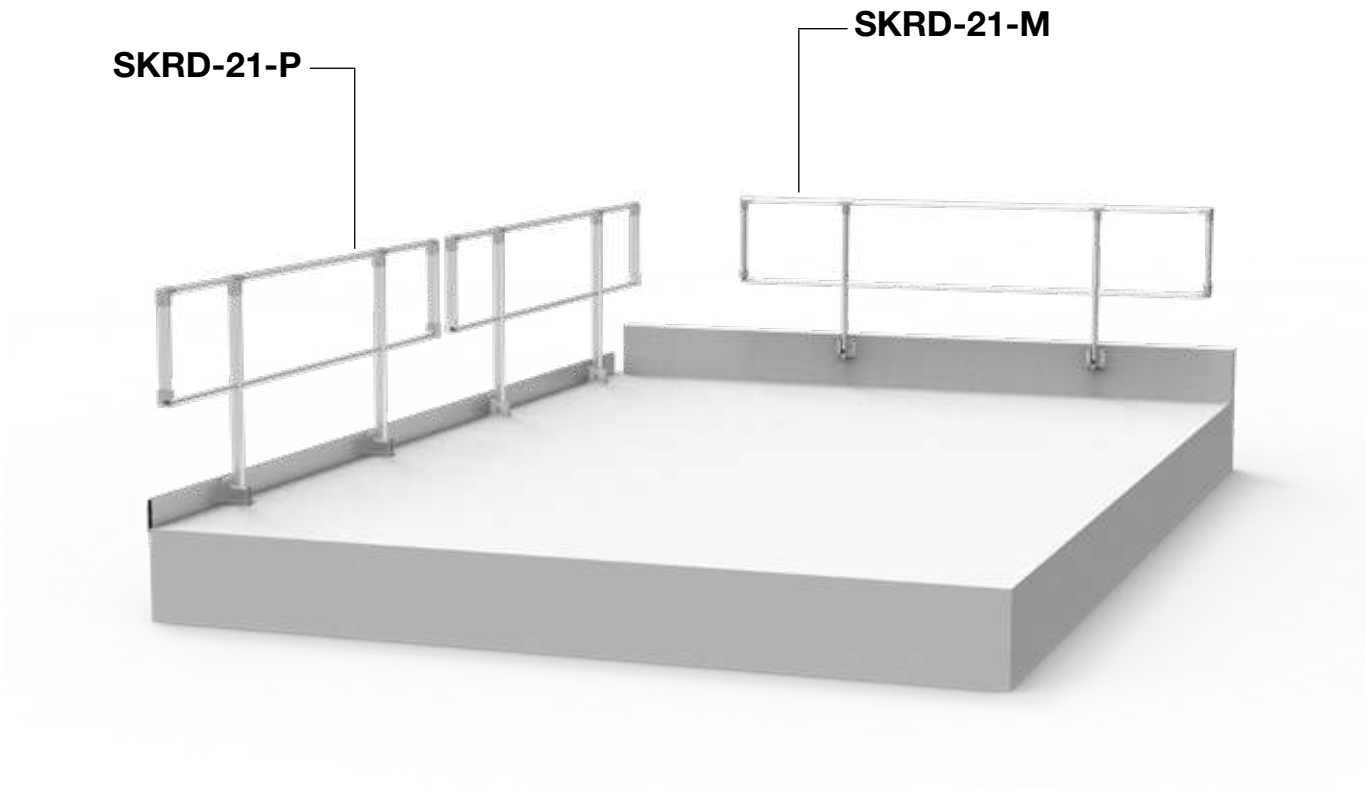
SKRD-21-P
SKRD-21-M



Guardrail on sheet metal
Straight or inclined

Compliance

- EN ISO 14122-3:2016



Toe board provided upon request

Cod. 361-3090-0000
SKLD-21



Straight guardrail fixing on sheet metal with a pitch of 20/25/30/33 cm. Suitable for metal sheet roofing.
Composition:
- Uprights
- Handrail
- Intermediate cross-piece

Possibility to customize the plate according to the sheet metal pitch (SKLD-SPECIAL)

Cod. 361-3100-0000
SKLI-21



Inclined guardrail fixing on sheet metal with a pitch of 20/25/30/33 cm. Suitable for metal sheet roofing.
Composition:
- Uprights
- Handrail
- Intermediate cross-piece

Possibility to customize the plate according to the sheet metal pitch (SKLI-SPECIAL)








Self-supporting guardrail
Straight, inclined, or reclinable guardrail

Compliance

- EN ISO 14122-3:2016
- EN 13374:2019 Class A

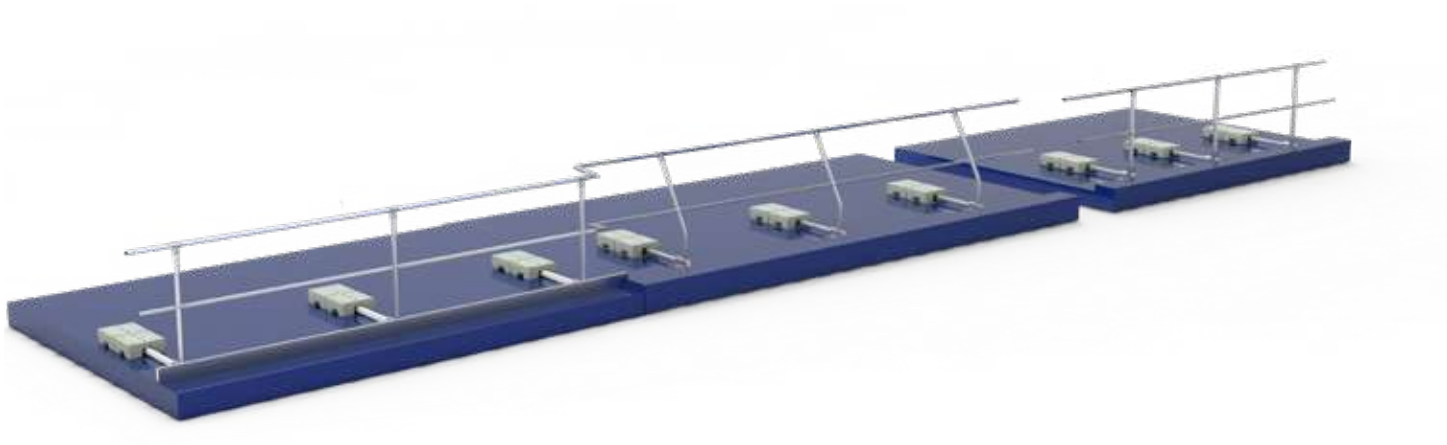

Cod. 361-3000-0000
SKAD-21



Straight self-supporting guardrail for flat roofs or with a maximum inclination not exceeding 5° and a wall height greater than 10 cm.
Composition:
- Uprights
- Handrail
- Intermediate cross-piece

Cod. 361-3010-0000
SKAI-21




Inclined self-supporting guardrail for flat roofs or with a maximum inclination not exceeding 5° and a wall height greater than 10 cm.
Composition:
- Uprights
- Handrail
- Intermediate cross-piece

Cod. 361-3030-0000
SKAR-21



Self-supporting reclinable guardrail suitable for flat roofs or with a maximum inclination not exceeding 5° and equipped with a wall height greater than 10 cm.
Composition:
- Uprights
- Handrail
- Intermediate cross-piece

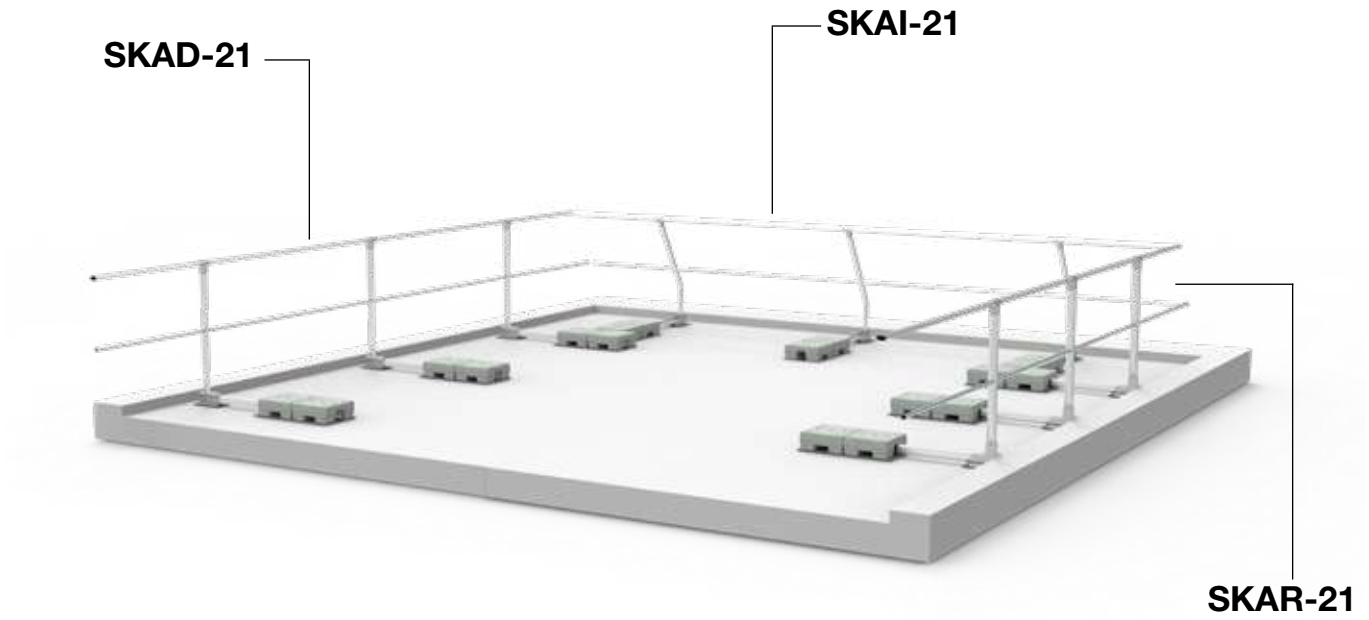

Possibility of use with a flashing less than 10 cm, spacing 1500 mm from the edge, adding the toe board.







Guardrail SK-73

The SK-73 guardrails are designed to optimize wall and floor installation on structures with a reduced fixing surface and capable of securely accommodating only 2 fixings.

The SK-73 systems comply with the technical standard EN ISO 14122-3:2016, and the maximum distance between the uprights in all types is 1.5 m.



Features

- Lightness and solidity
- Distance between uprights 1.5 m
- Custom design of supports
- High modularity and versatility
- Simplicity and speed of installation
- Possible customization of finishes
- Use of noble raw materials




Compliance

- EN ISO 14122-3:2016

Guardrail SK-73

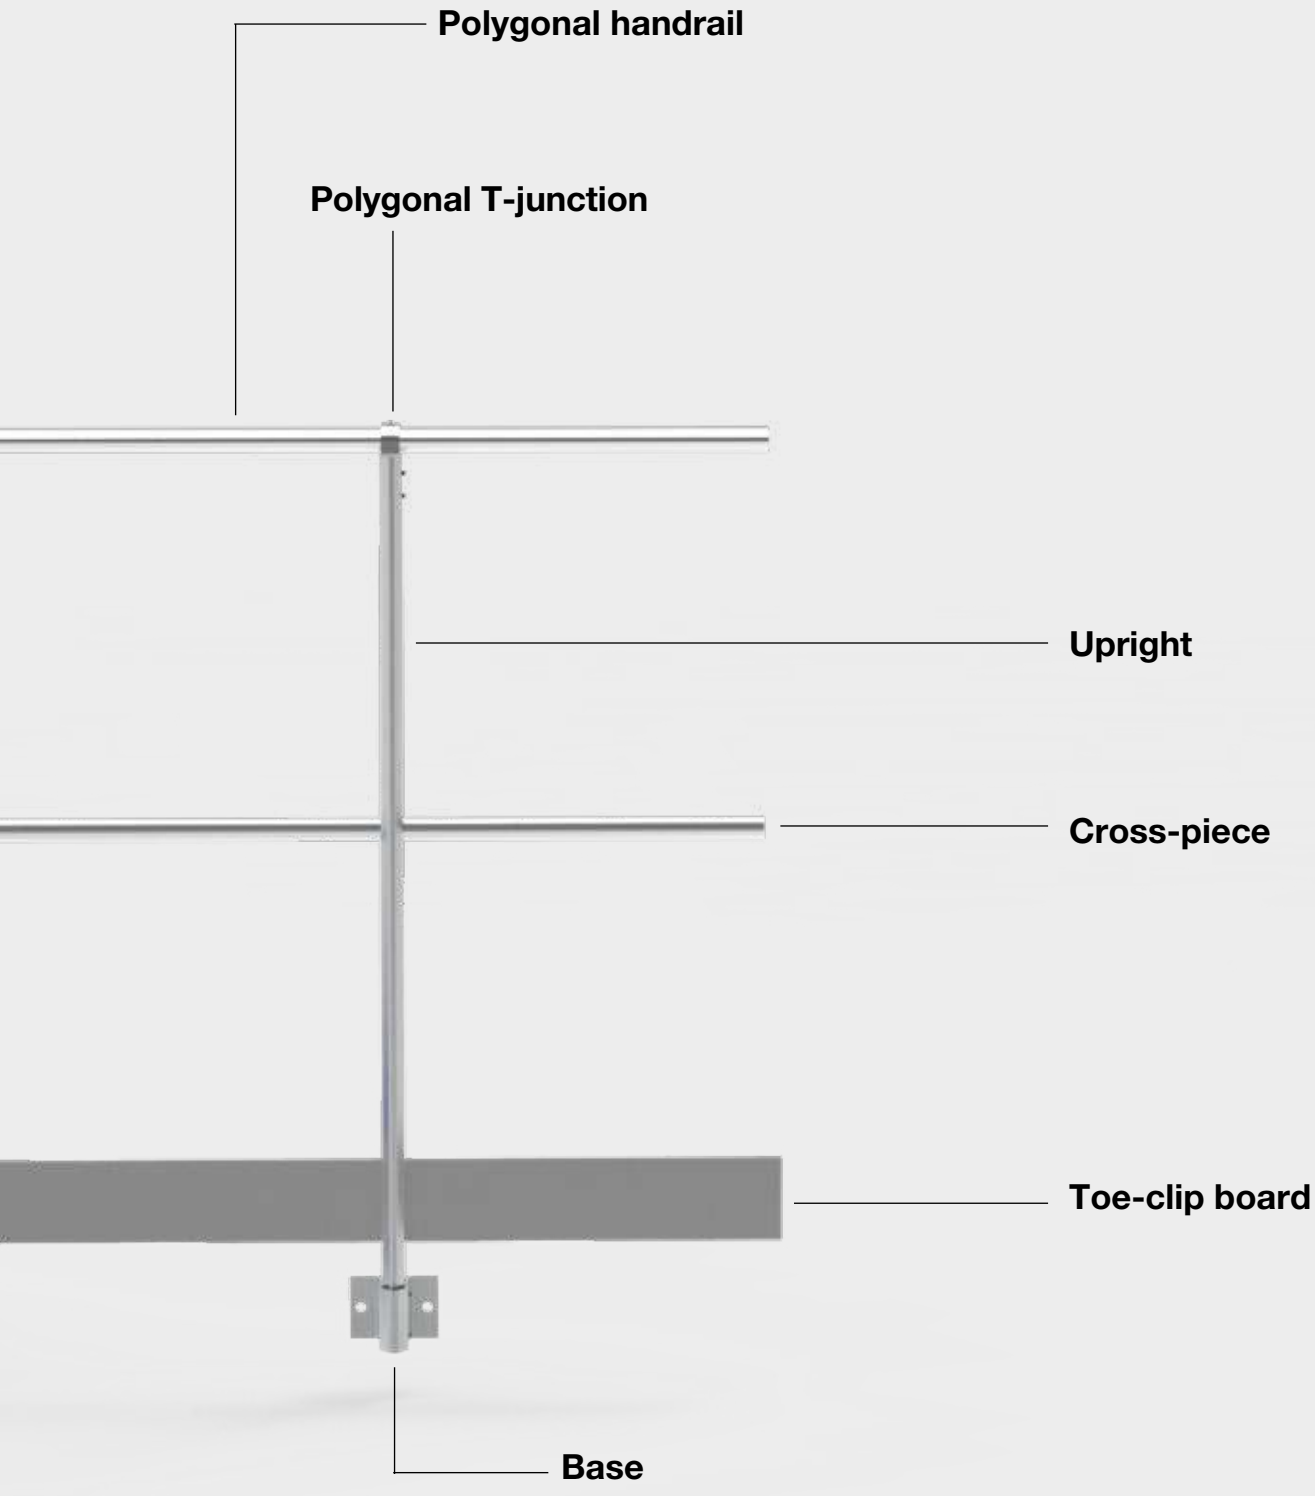


Polygonal handrail
Polygonal T-junction
Upright
Cross-piece
Toe-clip board
Base

Straight guardrail
Floor fixing

Compliance

- EN ISO 14122-3:2016



Cod. 361-4030-1000
SKMD1-73



Guardrail for structures with a wall over 60 cm. Composition:
- Uprights
– Handrail

Cod. 361-4030-2000
SKMD2-73




Guardrail for structures with a wall from 10 to 60 cm.
Composition:
- Uprights
- Handrail
- Intermediate cross-piece

Cod. 361-4030-3000
SKMD3-73



Guardrail for structures with a wall height less than 10 cm.
Composition:
- Uprights
- Handrail
- Intermediate cross-piece
– Toe-clip board

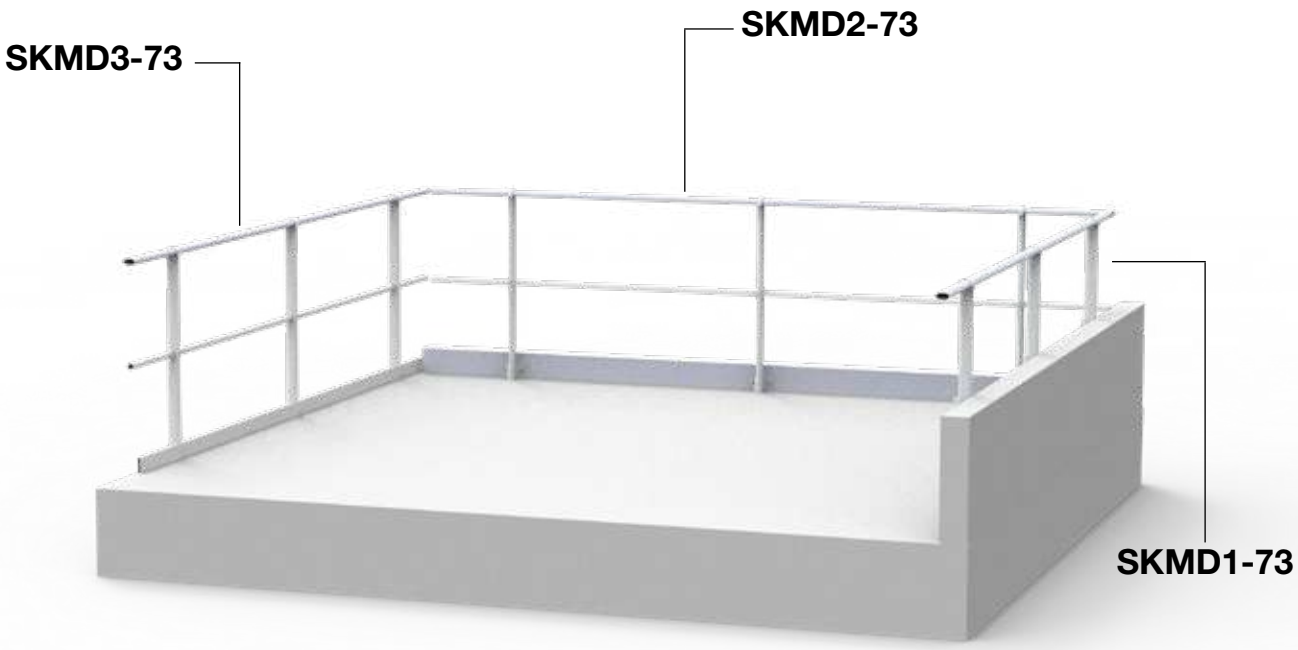

SKMD3-73
SKMD2-73
SKMD1-73



Inclined guardrail
Wall fixing

Compliance

- EN ISO 14122-3:2016

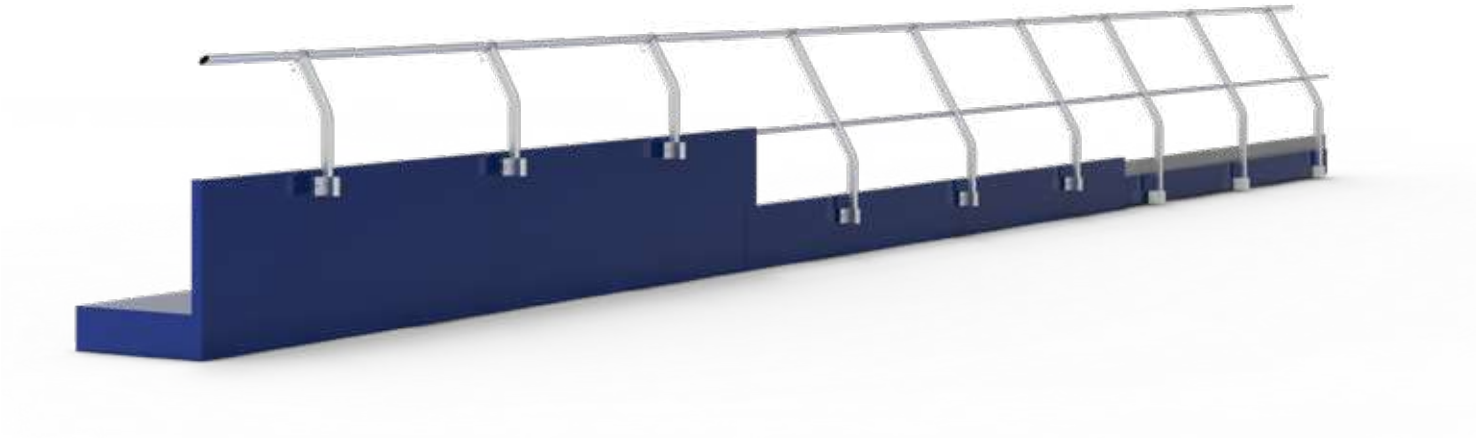

Cod. 361-4040-1000
SKMI1-73



Guardrail for structures with a wall height of more than 60 cm.
Composition:
- Uprights
– Handrail

Cod. 361-4040-2000
SKMI2-73




Guardrail for structures with a wall height from 10 to 60 cm.
Composition:
- Uprights
- Handrail
- Intermediate cross-piece

Cod. 361-4040-3000
SKMI3-73



Guardrail for structures with a wall height of less than 10 cm.
Composition:
- Uprights h ≤ 120 cm
- Handrail
- Intermediate cross-piece
- Toe-clip board

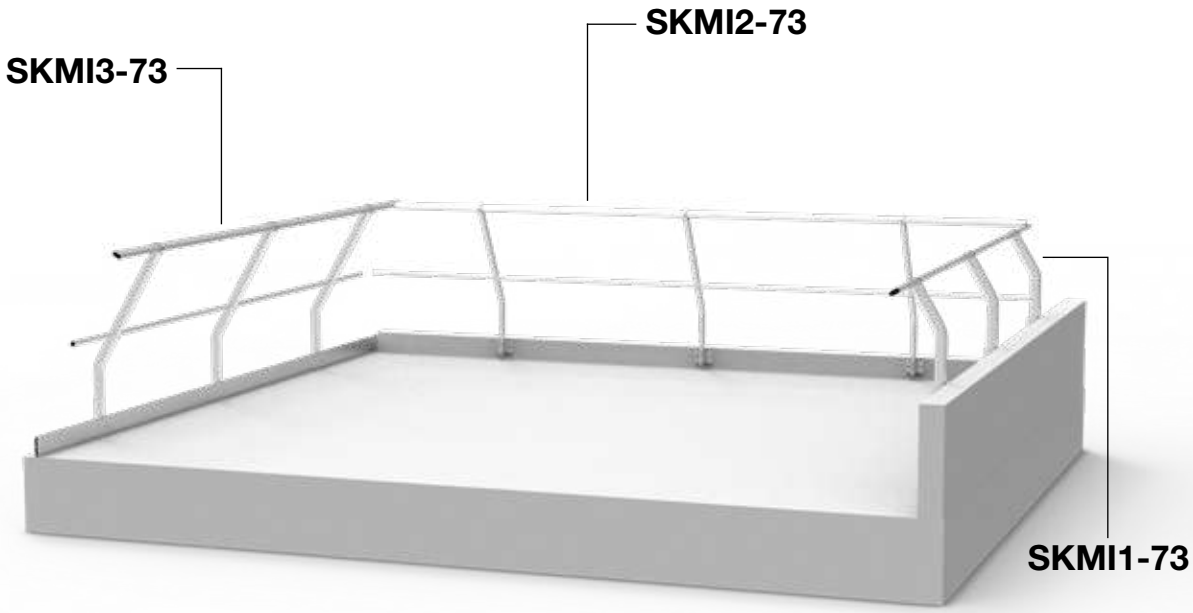
SKMI3-73
SKMI2-73
SKMI1-73




Straight guardrail
Floor fixing

Compliance

- EN ISO 14122-3:2016



Cod. 361-4060-1000
SKPD1-73

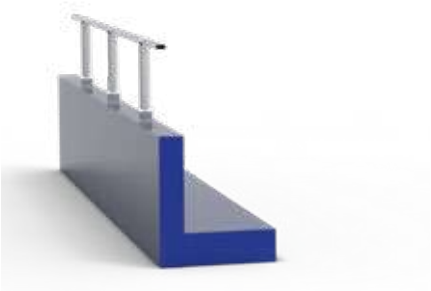

Guardrail for structures with a wall height of more than 60 cm.
Composition:
- Uprights
– Handrail

Cod. 361-4060-2000
SKPD2-73




Guardrail for structures with a wall height from 10 to 60 cm.
Composition:
- Uprights
- Handrail
- Intermediate cross-piece

Cod. 361-4060-3000
SKPD3-73



Guardrail for structures with a wall height of less than 10 cm.
Composition:
- Uprights
- Handrail
- Intermediate cross-piece
- Toe-clip board

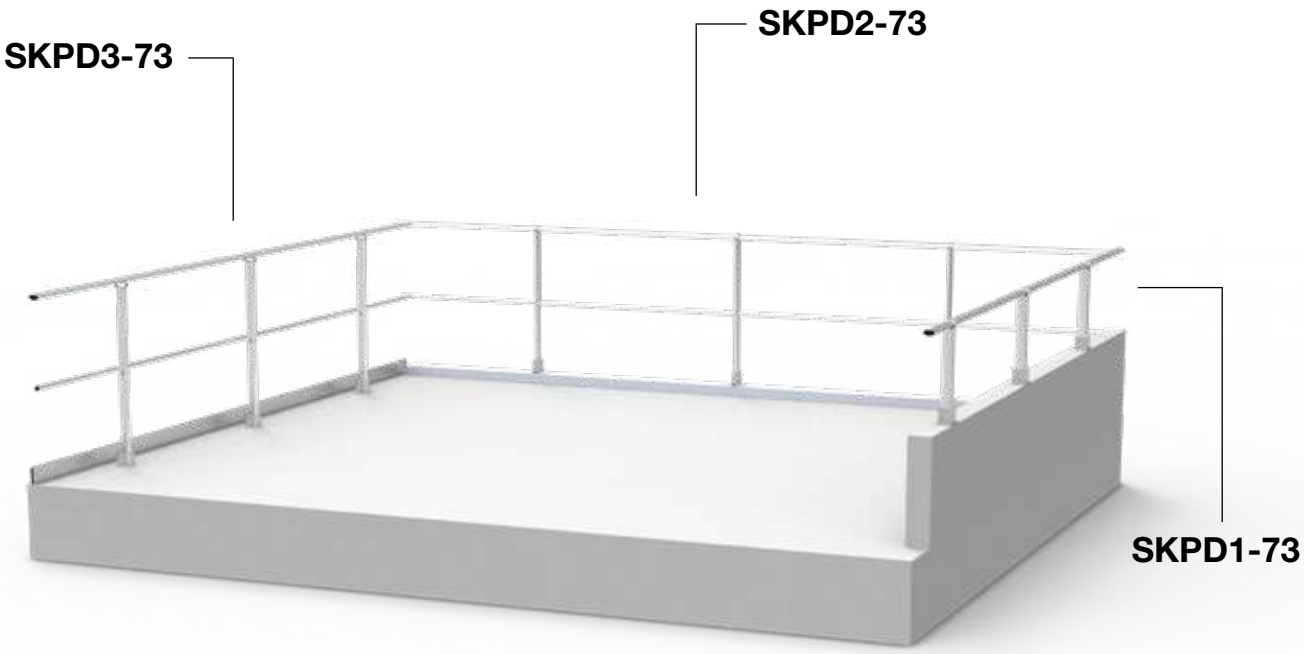

SKPD3-73
SKPD2-73
SKPD1-73



Inclined guardrail
Floor fixing

Compliance

- EN ISO 14122-3:2016

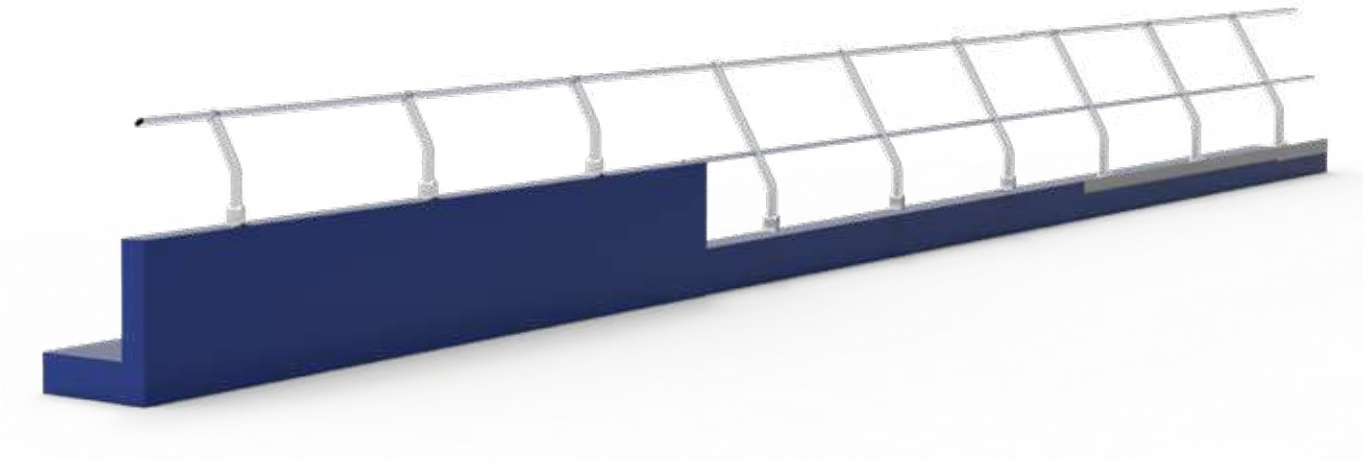

Cod. 361-4070-1000
SKPI1-73



Inclined guardrail with floor fixing for structures with a top edge over 60 cm.
Composition:
- Uprights
– Handrail

Cod. 361-4070-2000
SKPI2-73




Inclined guardrail with floor fixing for structures with a top edge from 10 to 60 cm.
Composition:
- Uprights
- Handrail
- Intermediate cross-piece

Cod. 361-4070-3000
SKPI3-73



Inclined guardrail with floor fixing for structures with a top edge less than 10 cm.
Composition:
- Uprights
- Handrail
- Intermediate cross-piece
– Toe-clip board

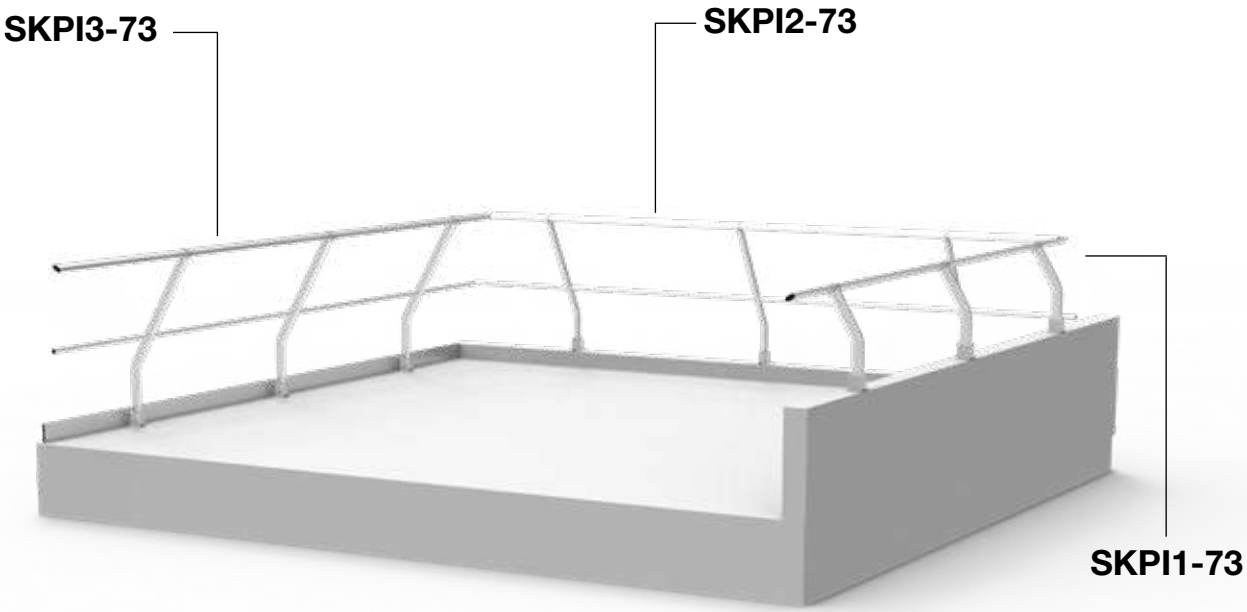
SKPI3-73
SKPI2-73
SKPI1-73



Guardrail protection skylights or special applications

Skylight protection

Self-supporting system designed to ensure the safety of workers near non-walkable skylights. The installation is carried out on the roof, following the perimeter of the skylight that needs to be protected.
Customized versions are available based on specific design requirements.

Composition:
- Aluminium alloy profiles
- Concrete counterweights



Gate and Corner Kit



Cod. 362-1900-0028

SK28

Landing gate designed to facilitate entry and exit from areas equipped with collective protection systems. Adjustable as needed, it features spring hinges for automatic closing.

Material: extrusion in alloy EN AW 6063-T6

Cod. 362-1900-0013 / Cod. 362-1900-0015

SK-ANG-2 / SKI-ANG-2



Corner section kit for straight guardrails SK-ANG-2.
Composition:
- Handrail
- Intermediate cross-piece
- SK03-K
- SK13-K

Corner section kit for inclined guardrails SKI-ANG-2.
Composition:
- Handrail
- Intermediate cross-piece
- SK05-K
- SK13-K

Cod. 362-1900-0014 / Cod. 362-1900-0016

SK-ANG-3 SKI-ANG-3



Corner section kit for straight guardrails SK-ANG-3.
Composition:
- Handrail
- Intermediate cross-piece
- SK03-K
- SK13-K
- SK19-K

Corner section kit for straight guardrails SKI-ANG-3.
Composition:
- Handrail
- Intermediate cross-piece.
- SK05-K
- SK13-K
- SK19-K

Guardrail SK-21 e SK-73
Components

Cod. 362-1610-0002
SKUM



Base used to fix the upright of the SK-21 parapet in wall configurations.
Material: aluminium alloy extrusion
Fixings: 4

Cod. 362-1610-0006
SKUM-22



Base used to fix the upright of the SK-73 parapet in wall configurations.
Material: aluminium alloy extrusion
Fixings: 2

Cod. 362-1610-0003
SKUP



Base used to fix the upright of the SK-21 parapet in floor configurations.
Material: aluminium alloy extrusion
Fixings: 4

Cod. 362-1610-0007
SKUP-22



Base used to fix the upright of the SK-73 parapet in floor configurations.
Material: aluminium alloy extrusion
Fixings: 2

Coppia
SKS-21



Shim plate for SK-21, allows the upright to be moved up to 40 mm away from possible interferences, such as a protruding flashing.
Material: aluminium alloy
Fixings: 4

Coppia
SKS-22



Shim plate for SK-73, allows the upright to be moved up to 40 mm away from possible interferences, such as a protruding flashing.
Material: aluminium alloy
Fixings: 2

Cod. 362-1610-0021

SKA-21



Base for self-supporting configuration used to connect the upright to the counterweight arm.
Material: aluminium alloy extrusion

Cod. 362-1900-0002

SKB



Counterweight for the self-supporting configuration of 25 kg.
Material: concrete

Cod. 362-1610-0004

SKR-21



Base used in a reclining configuration both on the wall and flat. It allows the vertical upright to tilt up to 90° towards the inside of the cover, minimizing the aesthetic impact on the building.
Material: aluminium alloy extrusion
Fixings: 4

Cod. 362-1610-0008

SKBA-21



Base used to connect the upright to the counterweight arm in the reclining self-supporting configuration. It allows the vertical upright to tilt up to 90° towards the inside of the cover, minimizing the aesthetic impact on the building.
Material: aluminium alloy

Cod. 362-1900-0001

SKAN-21



Protective sole to prevent cuts and incisions on waterproofing or surface finishes.
Material: recycled vulcanized rubber

Cod. 362-1900-0003

SKBN-21



Protective sole to prevent cuts and incisions on waterproofing or surface finishes.
Material: recycled vulcanized rubber

Guardrail SK-21 e SK-73
Components



Cod. 614-0212-3000
Cod. 614-0212-6000

SK01-L

Polygonal extrusion used for the horizontal handrail, vertical uprights, and for the horizontal lever arm of the counterweight.
Material: aluminium alloy extrusion
Length: 3 m, 6 m



Cod. 362-1700-0012

SK02-L-K

Polygonal junction used to connect two straight sections of the horizontal handrail.
Material: aluminium alloy extrusion
Length: 500 mm



Cod. 614-0112-3000
Cod. 614-0112-6000

SK01

Polygonal extrusion designed for use as a handrail in models SKMD3-21, SKMI3-21, SKRD-21-M, SKRD-21-P, SKAI-2, and SKAD-21.
Material: aluminium alloy extrusion
Length: 3 m, 6 m



Cod. 362-1700-0021

SK06-22

T-connector for SK-73 handrail used to connect the vertical upright to the horizontal handrail.
Material: aluminium alloy



Cod. 362-1700-0016

SK06-P-K

Polygonal and T-connector for SK-21 used to connect vertical uprights with the horizontal handrail.
Material: aluminium alloy die casting



Cod. 362-1700-0017

SK07-K

Polygonal L-shaped fitting used to connect the end uprights with the horizontal handrail.
Material: aluminium alloy casting

Cod. 362-1700-0013

SK03-K



Adjustable polygonal angle return used to connect two consecutive sections of handrail, allowing a horizontal change of direction.
Material: aluminium alloy die casting

Cod. 362-1700-0014

SK04-K



Vertical polygonal angle return used to connect two consecutive sections of handrail, allowing the overcoming of height differences.
Material: aluminium alloy casting

Cod. 362-1700-0015

SK05-K



Articulated corner return used to connect two consecutive sections of the handrail of the inclined parapet, allowing horizontal direction changes.
Material: aluminium alloy die casting

Cod. 362-1700-0018

SK08-K



Articulated T-shaped polygonal joint used to connect the uprights with the handrail to overcome height differences.
Material: aluminium alloy casting

Cod. 362-1700-0001

SK09W



Polygonal cap used to close the end of the handrail.
Material: PA12

Cod. 362-1700-2110

SK10-21



Support used to fix the handrail directly to the wall.
Material: aluminium alloy

Guardrail SK-21 e SK-73
Components



Cod. 614-0512-3000
Cod. 614-0512-6000
SK11-L

Round extrusion used to create the intermediate crosspiece when the height of the fascia is less than 60 cm.
Material: aluminium alloy extrusion
Length: 3 m, 6 m



Cod. 362-1750-0112
SK12-L-K

Round joint used to connect two straight sections of the intermediate crossbar.
Material: Aluminium alloy extrusion
Length: 150 mm



Cod. 362-1750-0113
SK13-K

Round angle return used to connect two consecutive sections of the crossbar, allowing a change in both horizontal and vertical direction.
Material: Aluminium alloy die-casting



Cod. 625-4000-0006
ILT30

Circular cap used to close the end of the crossbar.
Material: PE-LD



Cod. 362-1750-2114
SK14-21

Support used to fix the crossbar directly to the wall.
Material: Aluminium alloy



Cod. 614-0712-3000
Cod. 614-0712-6000
SK16-L

Toe board used to prevent the fall of materials when the building's parapet is absent or less than 10 cm.
Material: Aluminium alloy
Length: 3 m, 6 m

Cod. 362-1800-1018

SK18-L-K



Joint used to fix together two adjacent toe boards.
Material: Aluminium alloy
Length: 100 mm

Cod. 362-1800-1016

SK17-L-K



Support used to fix the toe board to the floor bases (SKA-21, SKUP, SKR-21).
Material: Aluminium alloy

Cod. 362-1800-0319

SK19-K



Angle return used to connect two consecutive sections of toe board, allowing a horizontal change of direction.
Material: Aluminium alloy






Allukemi Step gangways

Genesi gangways and overpass walkways are modular systems that make it possible to create safe walkways on roofs. Operators are guided to work areas through a specially designed route after careful risk assessment, considering the obstacles present and their nature.

Genesi has designed gangways and overpass walkways made entirely of aluminium, which are modular and can be configured according to the needs of the route and the type of structure. They make it possible to design: routes with stairs and shed passages, to traverse steeply sloping sections, to create complex elevated passages between machinery and silos, to overcome obstacles or fragile surfaces such as pipes, plant, machinery, and polycarbonate or fibreglass skylights.

Genesi gangways and overpass walkways can also be adapted to the design requirements according to the space available for the width of the walkways (from 60 cm to 120 cm) and can be fitted with guardrails on one or both sides.

With the help of our technical department, we can study and implement the most suitable solutions for each structure, possibly adding an individual protection system where necessary.

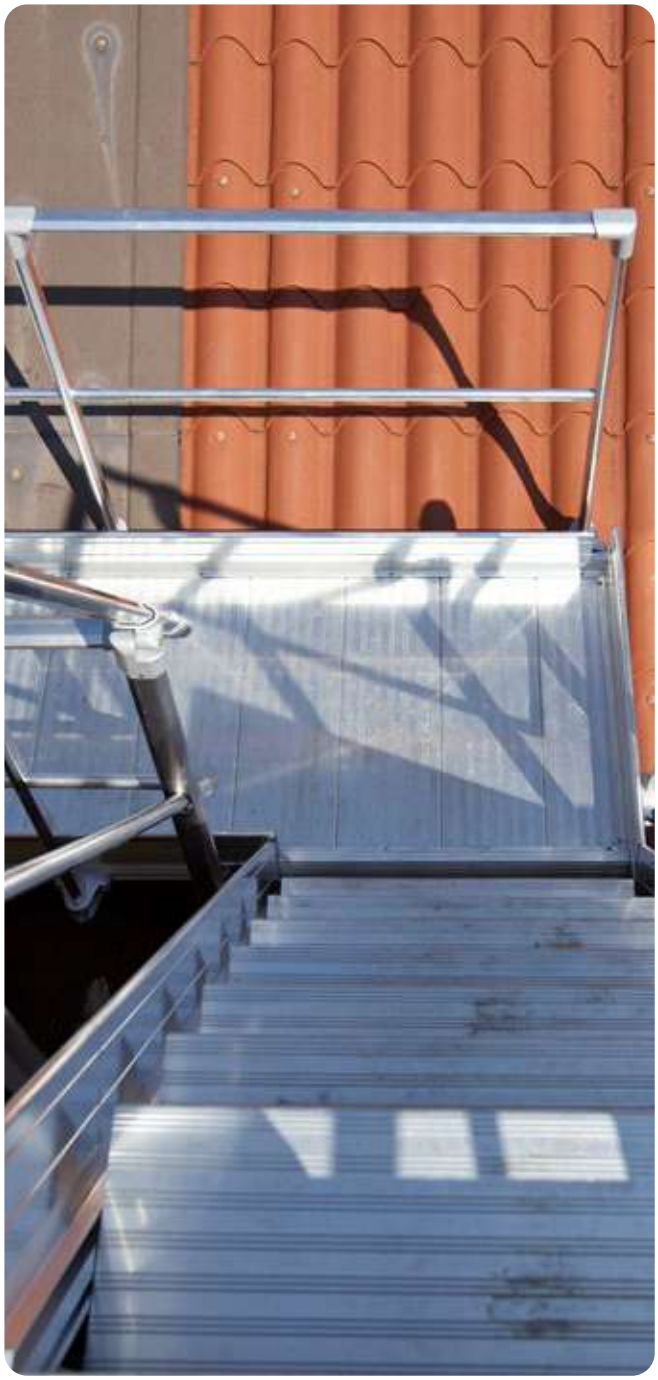

Features


- Lightweight and solidity
- Wide range of walking surface dimensions (60 cm - 120 cm)
- Complete range for every installation requirement
- Maximum flexibility in design
- High modularity and versatility
- Simple and quick installation
- Continuity of routes over changes in slope
- Customised design High durability
- Possible customisation of finishes
- Design Use of noble materials




Compliance

- EN ISO 14122-2:2001+A1:2010

Custom solution: overpasses and gangways

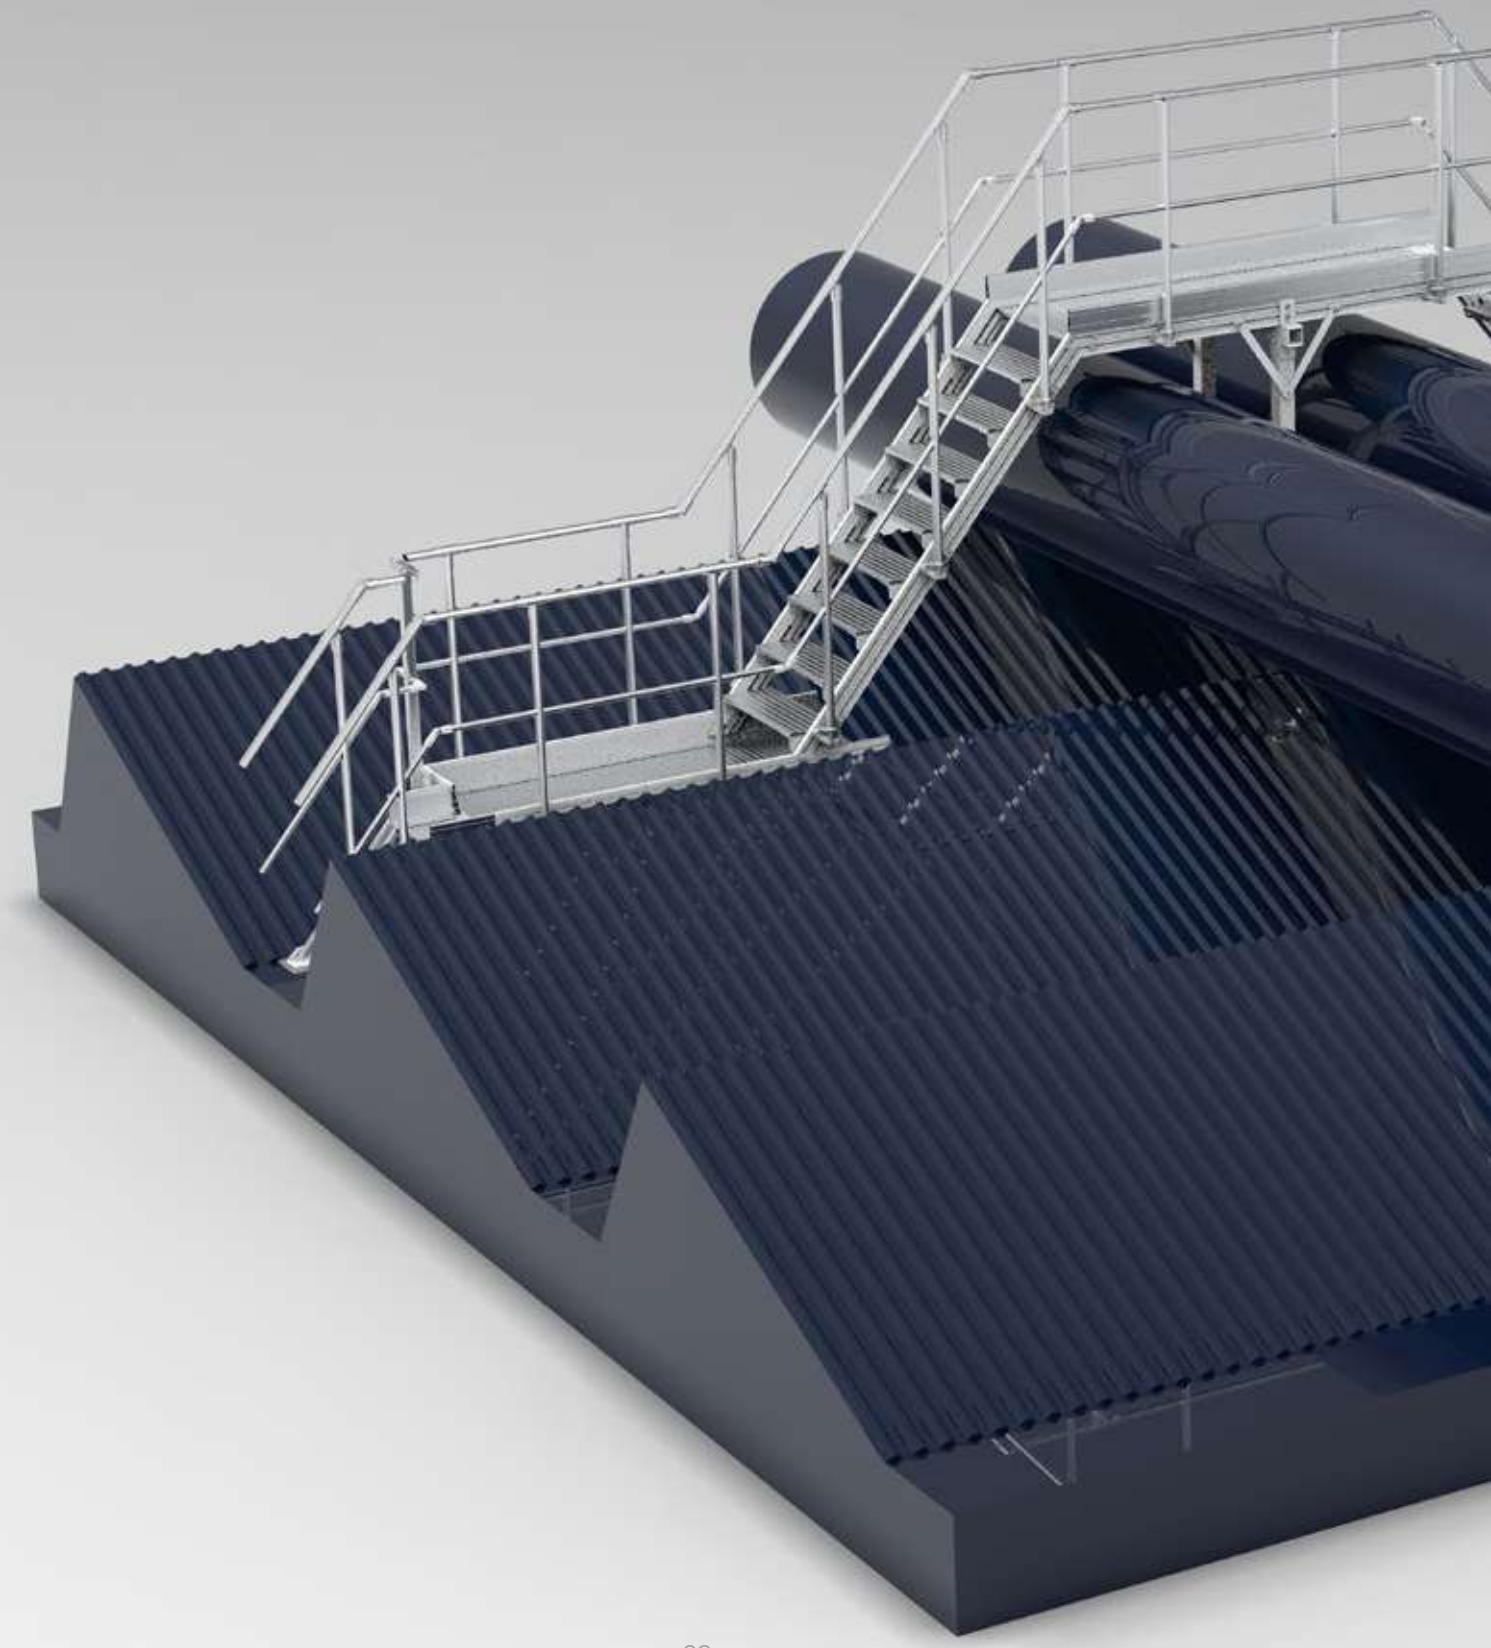

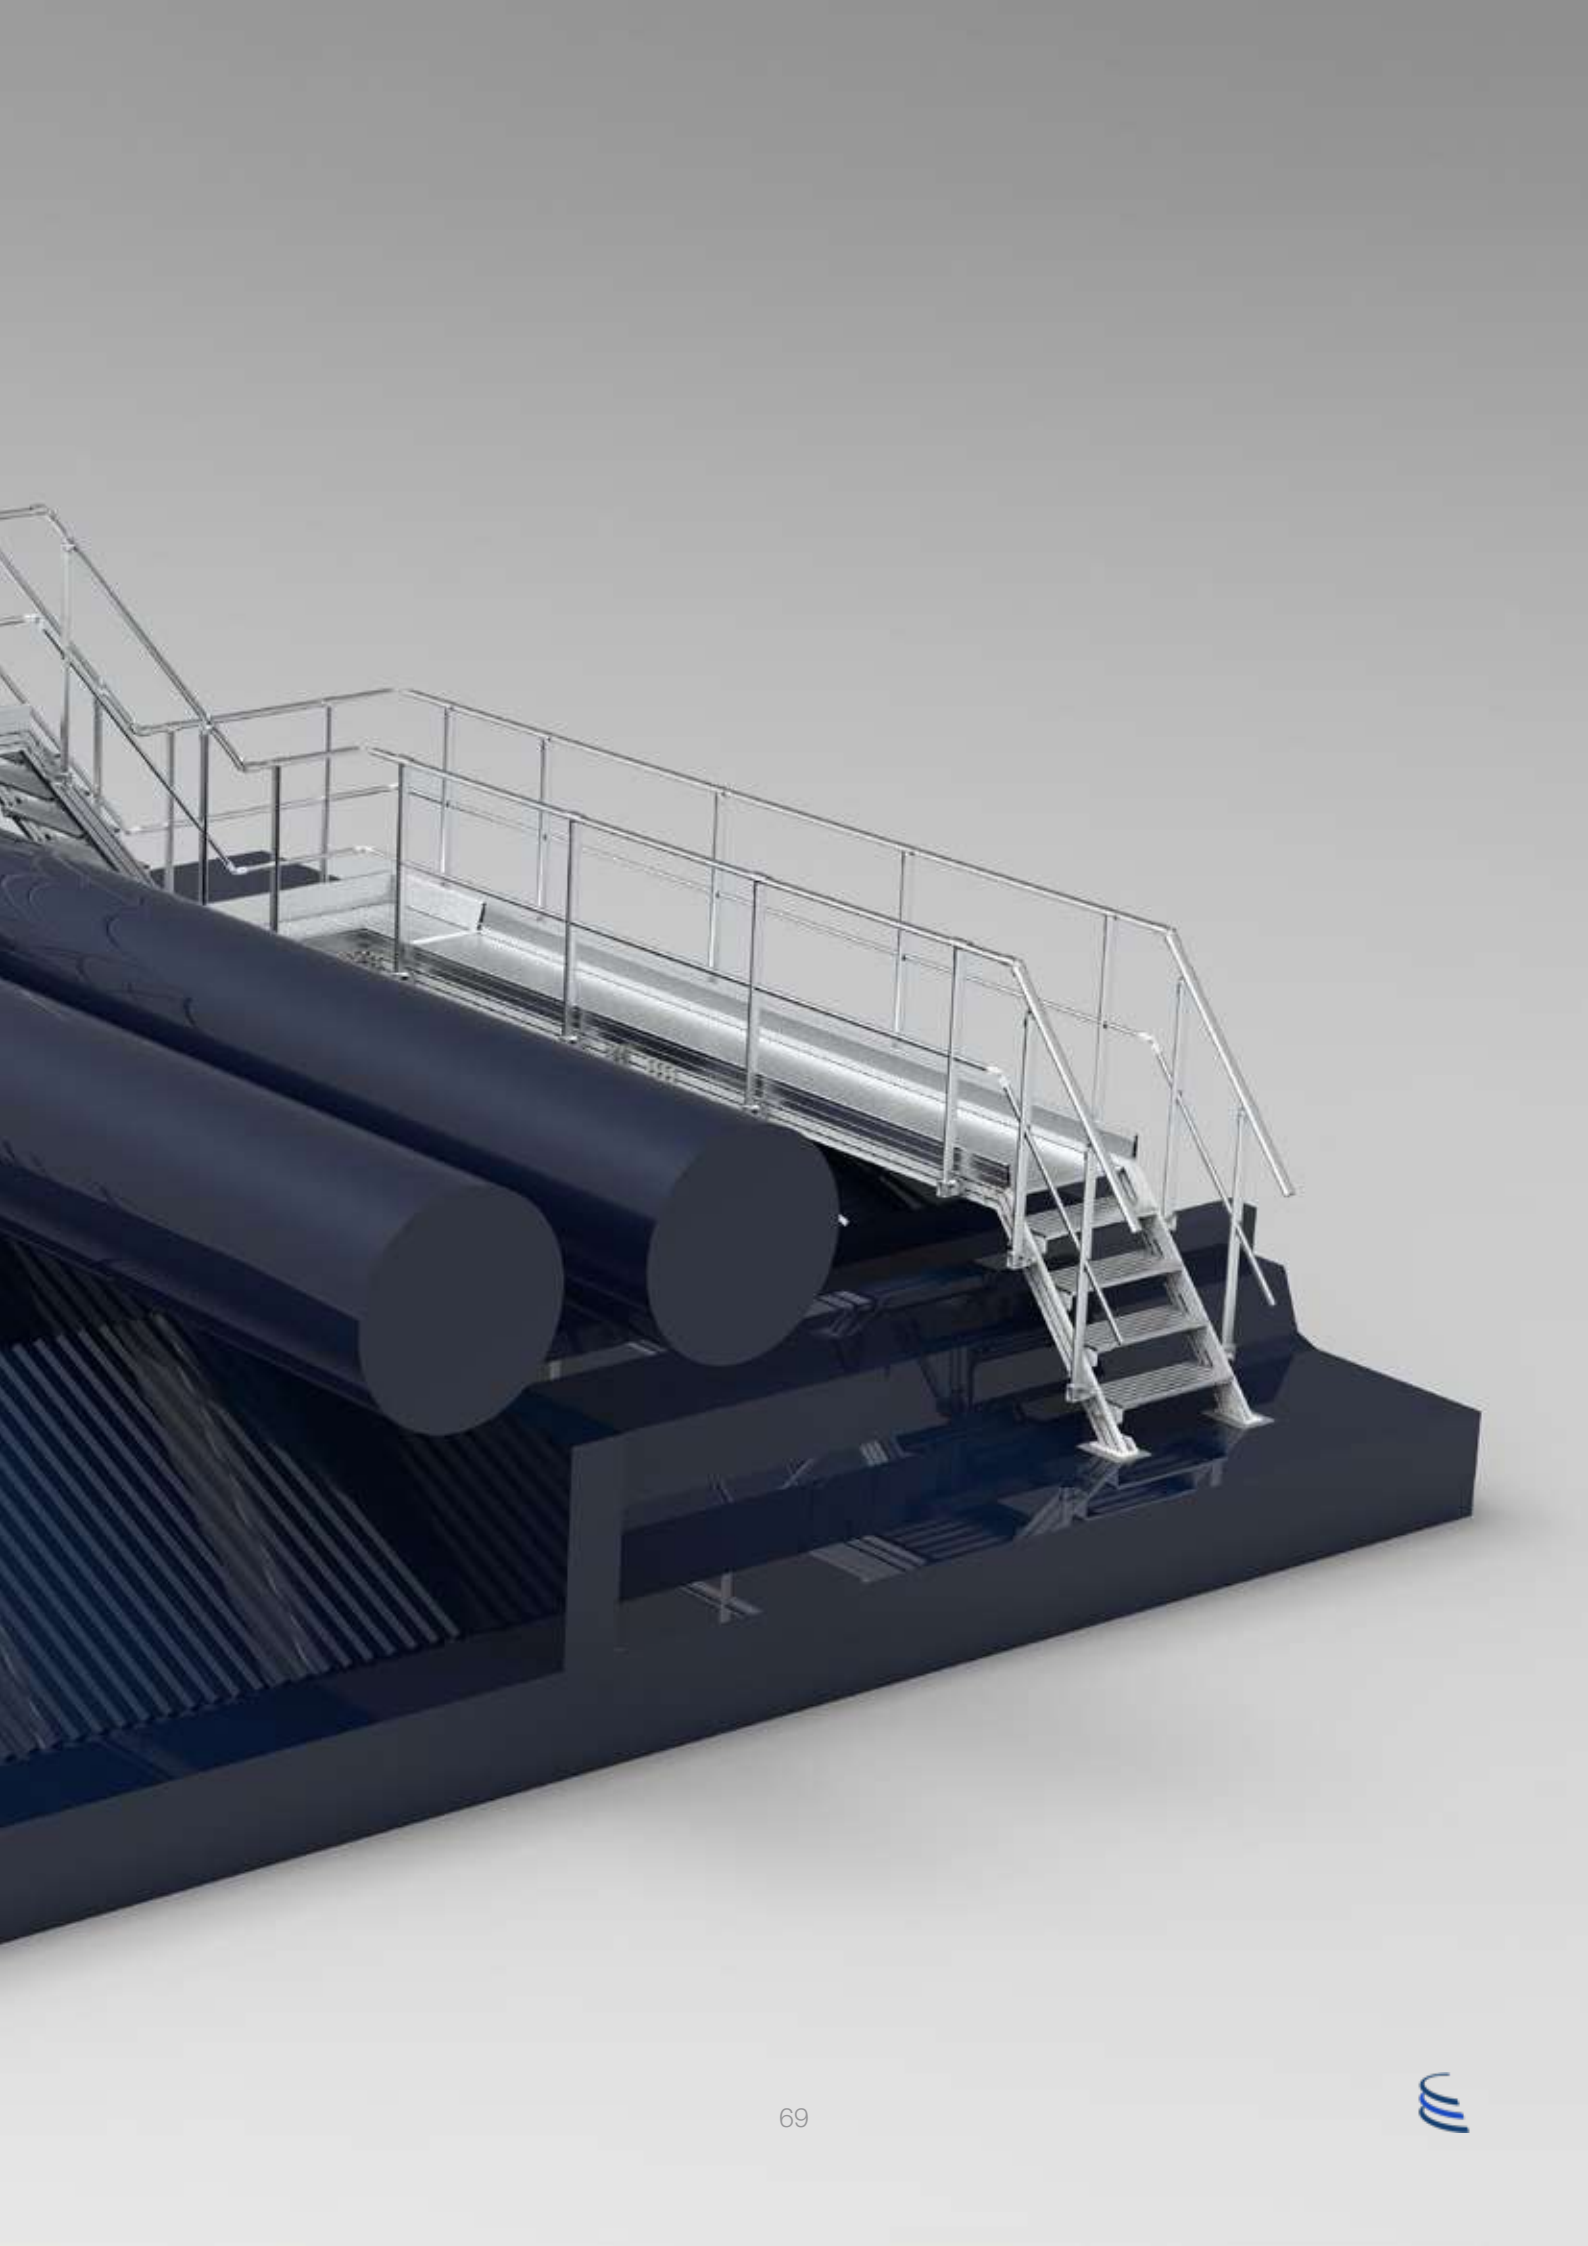

Allukemi Step




Polygonal handrail
Cross-piece
Toe-clip board
Upright
Feet

Allukemi Step gangways
Possible configurations

Cod. 341-0060-0000
ST01-2017



Gangway used to create a safe passageway and is also available with perforated platforms for better water drainage.
Material: aluminium alloy
Fixing: every 3 m
Length: from 1 m to 6 m
Standard walkway width: 600 mm

ST02-73



Gangway used to create a safe passageway and is also available with perforated platforms for better water drainage.
Gangway with 1 guardrail.
Material: aluminium alloy extrusion
Fixing: every 3 m
Length: from 1 m to 6 m
Standard walkway width: 600 mm

ST03-73



Gangway used to create a safe passageway and is also available with perforated platforms for better water drainage.
Gangway with 2 guardrails.
Material: aluminium alloy extrusion
Fixing: every 3 m
Length: from 1 m to 6 m
Standard walkway width: 600 mm

ST04-73



Ladder used at steep slopes or level changes to provide continuity to the gangway. Ladders suitable for slopes between 45° and 60° can be made.
Material: aluminium alloy extrusion
Finish: natural
Length: variable
Standard walkway width: 600 mm

Cod. 342-7050-0570
Cod. 342-7050-1000
Cod. 342-7100-0570
Cod. 342-7100-1000
Cod. 342-7100-1400
ST07-73



Overpass gangway composed of the combination of stairway and gangway sections. It is normally used to overpass installations, pipelines, or to cross areas where particular risks are present.
Material: aluminium alloy extrusion
Finish: natural
Length: variable
Standard walkway width: 600 mm

Cod. 344-1005-0002
ST15



Universal plate for fixing on corrugated sheets. The length of the plate allows support on multiple corrugations to evenly distribute the load without damaging the sheet.
Material: aluminium
Standard fixing pitch: 1 plate | 3 m
Dimensions: variable according to design requirements

Cod. 612-1002-0031

ST11-2017



Single fixing plate used for direct fixing of the gangway on reinforced concrete structures.
Material: aluminium
Standard fixing pitch: 1 pair | 3 m





Fall protection devices





Vertical X 2.0 lifeline

Vertical X 2.0 is a guided type fall arrest device that includes an anchor line designed to protect operators exposed to the risk of falling from height during work activities or access at height. Designed to offer maximum versatility, it can be installed on ladders or vertical structures.


It complies with PPE Regulation 2016/425, EN 353-1:2014+A1:2017 standard and RFU PPE-R/11.119 Version 1.

The system can be used by up to three operators simultaneously, each one with their own guided type fall arrest device (GTFA) equipped with an energy absorber, which can be inserted at any point along the line.

As a low starting element for the rigid anchor line, Vertical X 2.0 offers two options:


- The PRO tensioner with integrated tension indicator, which allows quick reading of the cable tension.
- The LIGHT tensioner, which ensures the correct tension of the line, without the tension value control function.

The system is completed by the landing accessory, which can be installed on the ladder upright using the appropriate brackets. The punctual anchor device ensures that all connection and disconnection operations at height are safe.

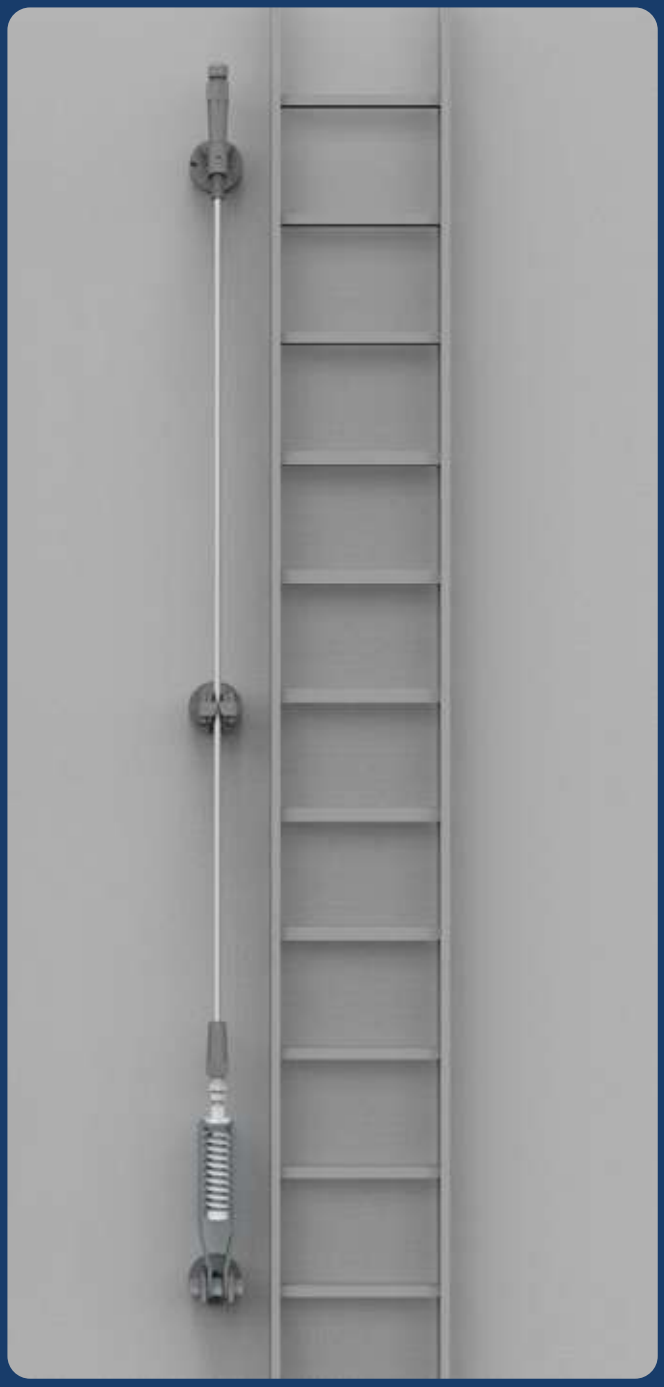

Features

- Guided type fall arrest device (GTFA) with energy absorber
- Protection for up to 3 operators, each one equipped with their own GTFA
- Accessory for landing on uprights with ergonomic handles and anchor device
- The tension indicator (optional) integrated into the low starting element allows the user to check the cable tension before using the system. Correct tension ensures optimal protection performance.
- Mechanical cable connection without crimping
- Maximum system length: 100m
- Can be installed directly on the structure or on the ladder upright thanks to the special brackets

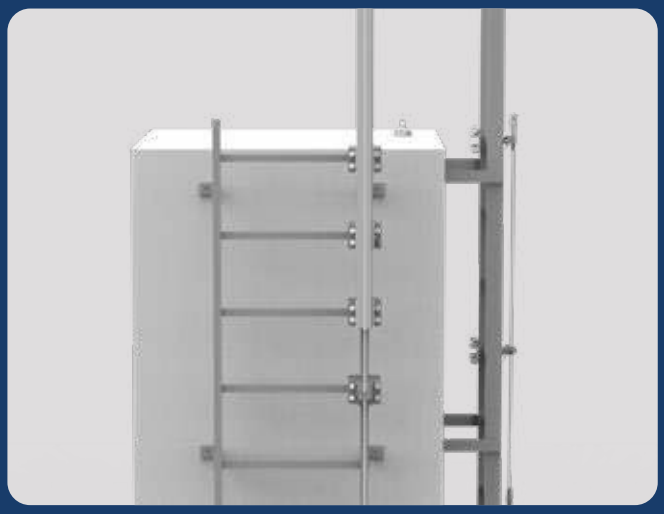

Compliance

- PPE Regulation 2016/425
- EN 353-1:2014+A1:2017
- PPE-R/11.119 Version 1

Vertical X 2.0 lifeline
Configurations


1 **Upright with landing**


2 **Fixing on upright**

3 **Wall fixing**



Light VEX336 and Pro VEX325 tensioners

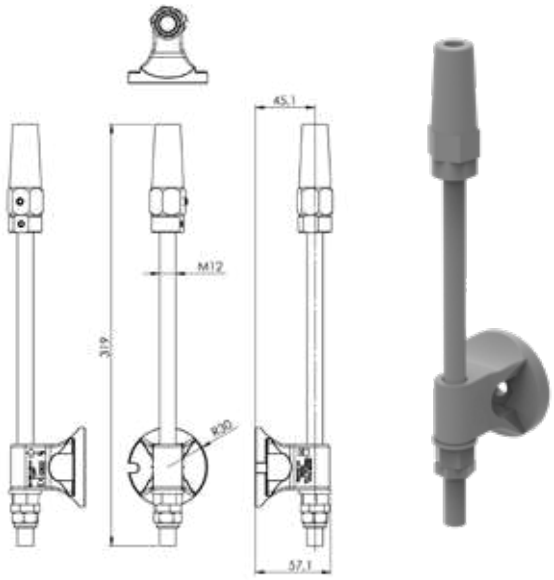

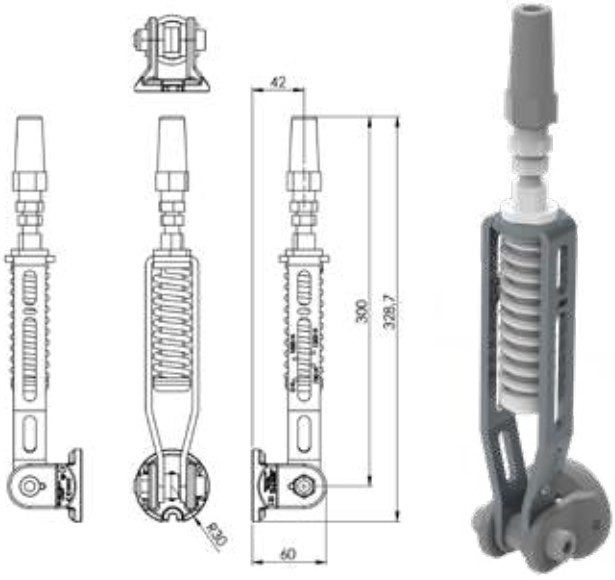

VEX116 landing

The VEX116 landing is equipped with brackets for connection to different types of uprights. It is designed and tested with the Vertical X 2.0 system to extend the rigid line beyond the last rung and allow safe landing at height. The VEX116 landing is equipped at the top with handles to facilitate landing and a certified anchorage point. VEX116 is equipped with the initial element VEX115



Vertical X 2.0 lifeline
Components

Cod. 313-1002-0001
VEX100




Guided type fall arrest device with energy absorber. Available soon also in versions VEX101 and VEX102.

Cod. 312-1700-0001
VEX21



Cable terminal

Cod. 312-1700-0003
VEX115



Starting element to be positioned at the top of the Vertical X 2.0 line. The cannula inserted in the component guides and protects the cable.

Cod. 312-1700-0002
VEX104



Intermediate cable guide element, can be fixed directly to the structure or to the existing ladder using the tested brackets. Material: stainless steel

Cod. 312-1700-0004
VEX325



Low Start Pro to be positioned at the base of the rigid anchorage line with integrated tensioner and tension indicator

Cod. 312-1700-0005
VEX336



Low Start Light to be positioned at the base of the rigid anchorage line with simple tensioner (without tension indicator).

Cod. 312-1700-0006

VEX116



Landing to be fixed to the upright.

Cod. 312-1700-0008

VEX117



Bracket for connecting elements on the upright if the landing is installed at the top.

Cod. 611-1001-0000

AP-CAVO8



Stainless steel cable Ø 8 mm.

Cod. 312-1700-0007

VEX106



Bracket for applying components on the upright of an existing ladder.



Cage Ladders

Caged or ship ladders are a viable solution for creating vertical access in compliance with national legislation. Made of anodized aluminium and specifically designed to be applied outdoors, they are resistant to weather conditions.

The rung ladders, equipped with an aluminium cage starting from 2.5 m, prevent the operator from falling outward during ascent and descent operations.

Genesi caged ladders are designed and supplied to adapt to any type of structure and to solve problems related to the presence of pipes and various types of systems. The wide range of brackets allows the installation of the ladder in different contexts.

Additionally, the ladders can be equipped with:

- Hatch or anti-intrusion door
- Intermediate resting platform
- Landing handrails
- Landing gate with automatic closure



Features

- Ease of installation
- Modularity
- Lightness
- On-site adaptability
- Aluminium
- Non-slip steps



Compliance

- D.LGS. 81/08, art.113
- Version compliant with EN ISO 14122-4 available on request



LadderCrab-I

Genesi LadderCrab-I with central upright is an access system designed to ensure maximum safety in numerous industrial applications. This device is the ideal solution for access to roofs, plants and machinery, or in all those contexts where it is necessary to accompany the operator up and down safely.

AluxCrab V rail is the central upright of the ladder and is designed to ensure that the V-XC10 guided type fall arrest device (GTFA) stops in the event of a fall, not only through friction but also through a mechanical system thanks to the rack inserted into the rail. This improves performance when used in extreme weather conditions or in the event of dirt or contaminants accidentally entering the system. Each component of the device is tested and complies with the following:

- The central rail and guided type fall arrest device comply with PPE Regulation 2016/425 and EN 353-1:2014+A1:2017 standard.
- The ladder complies with EN ISO 14122-4:2016 standard.
- The Pinko Rescue anchor point complies with EN 795:2012 type A standard.

The ladder is equipped with aluminium rungs, available in both fixed and retractable versions. The version with retractable rungs reduces visual impact in architecturally sensitive contexts or when the ladder is not in use.

A wide range of accessories allows complete system configurability: straight landings, recovery and rest platforms, as well as anti-intrusion carter to prevent unauthorised access.



Features

- Lightness and strength
- High durability
- Minimal visual impact
- Wide range of accessories for every geometry
- Possibility of anti-intrusion device
- Rungs with non-slip coating
- Fall indicator integrated into the rack structure



Compliance

- The central rail (AluxCrab-V) and the guided type fall arrest device (V-XC10) comply with the PPE Regulation (EU) 2016/425, the EN 353-1:2014+A1:2017 standard, and the RFU PPE-R/11.119 Version 1
- The ladder complies with the geometric requirements and load resistance parameters specified on the structure and rungs of the EN ISO 14122-4:2016 standard
- The Pinko Rescue anchorage point complies with the EN 795:2012 type A standard.

LadderCrab-I
Components

Cod. 323-0832-0003
V-XC10



Guided type fall arrest device equipped with an energy absorber. Made of aluminium, it is equipped with 4 sliding wheels with 4 stainless steel rolling bearings, ensuring high movement performance. The automatic stop is ensured by the blocking system with mechanical engagement on the rack.

Cod. 322-0832-1500
Cod. 322-0832-3000
V-XC01



AluxCrab V rail supplied in bars of 2990mm and 1500mm. The XC01 profile, integrated with the V-XC05 rack, allows the safe stopping of the GTFA trolley.

Cod. 322-0832-0005
XC19



Openable end stop for AluxCrab, AluxCrab V, and LadderCrab-I. The component prevents the unintentional exit of the mobile anchoring device (XC10A) or the guided type fall arrest device (V-XC10) and, at the same time, allows its insertion into the anchoring system. The device is designed so that the removal of the mobile device occurs through three sequential voluntary actions.

Cod. 322-0832-0018
V-XC20-K



GTFA insertion plate fixed at the ends of the rigid anchoring line. Prevents incorrect orientation of the guided type fall arrest device during insertion phases.

Cod. 322-0832-0007
XC21



Allows joining two sections of the XC01, V-XC01, or LadderCrab-I profile ensuring continuity. It is equipped with an EPDM gasket that accommodates thermal expansions of the profile and facilitates positioning in the rail of the junction.

Cod. 332-4000-0020
V-XC26



Straight landing with fixed rungs.



Cod. 332-4000-0021
V-XC27

Straight landing with foldable rungs.



Cod. 332-4000-0018
CARTER

Lockable intrusion protection cover to inhibit unauthorized personnel from climbing the ladder.



Cod. 324-0832-0001
V-XC34

Fixing bracket.
L= 200mm



Cod. 324-0832-0002
V-XC35

Fixing bracket.
L=360/460mm



Cod. 332-4000-0023
Rest platform

Foldable rest platform.



Cod. 351-2001-0002
PINKO RESCUE

Anchor point.



Anchor points

The Genesi anchor points allow operators to move and work safely in any situation where there is a risk of falling from a height, by securing themselves with an appropriate personal protection system.

The wide range of Genesi anchor points has been specifically developed to meet installation needs on all horizontal, vertical, and inclined surfaces made of corrugated or seamed sheet metal, concrete, wood, or tiles; or waterproofed with PVC or bituminous membrane.



Features

- Wide range of solutions
- Use of noble raw materials
- Low visual impact.



Compliance

- EN 795:2012 type A
- UNI 11578:2015

1 **AP500-PVC-EAR12**

Anchor point for PVC sheath

2 **AP500-EAR12**

Anchor point for bituminous sheath

3 **ALU12**


Aluminium anchor point

4 **SPS-ALU**

Support with aluminium anchor point

5 **EAR12**

Stainless steel anchor point

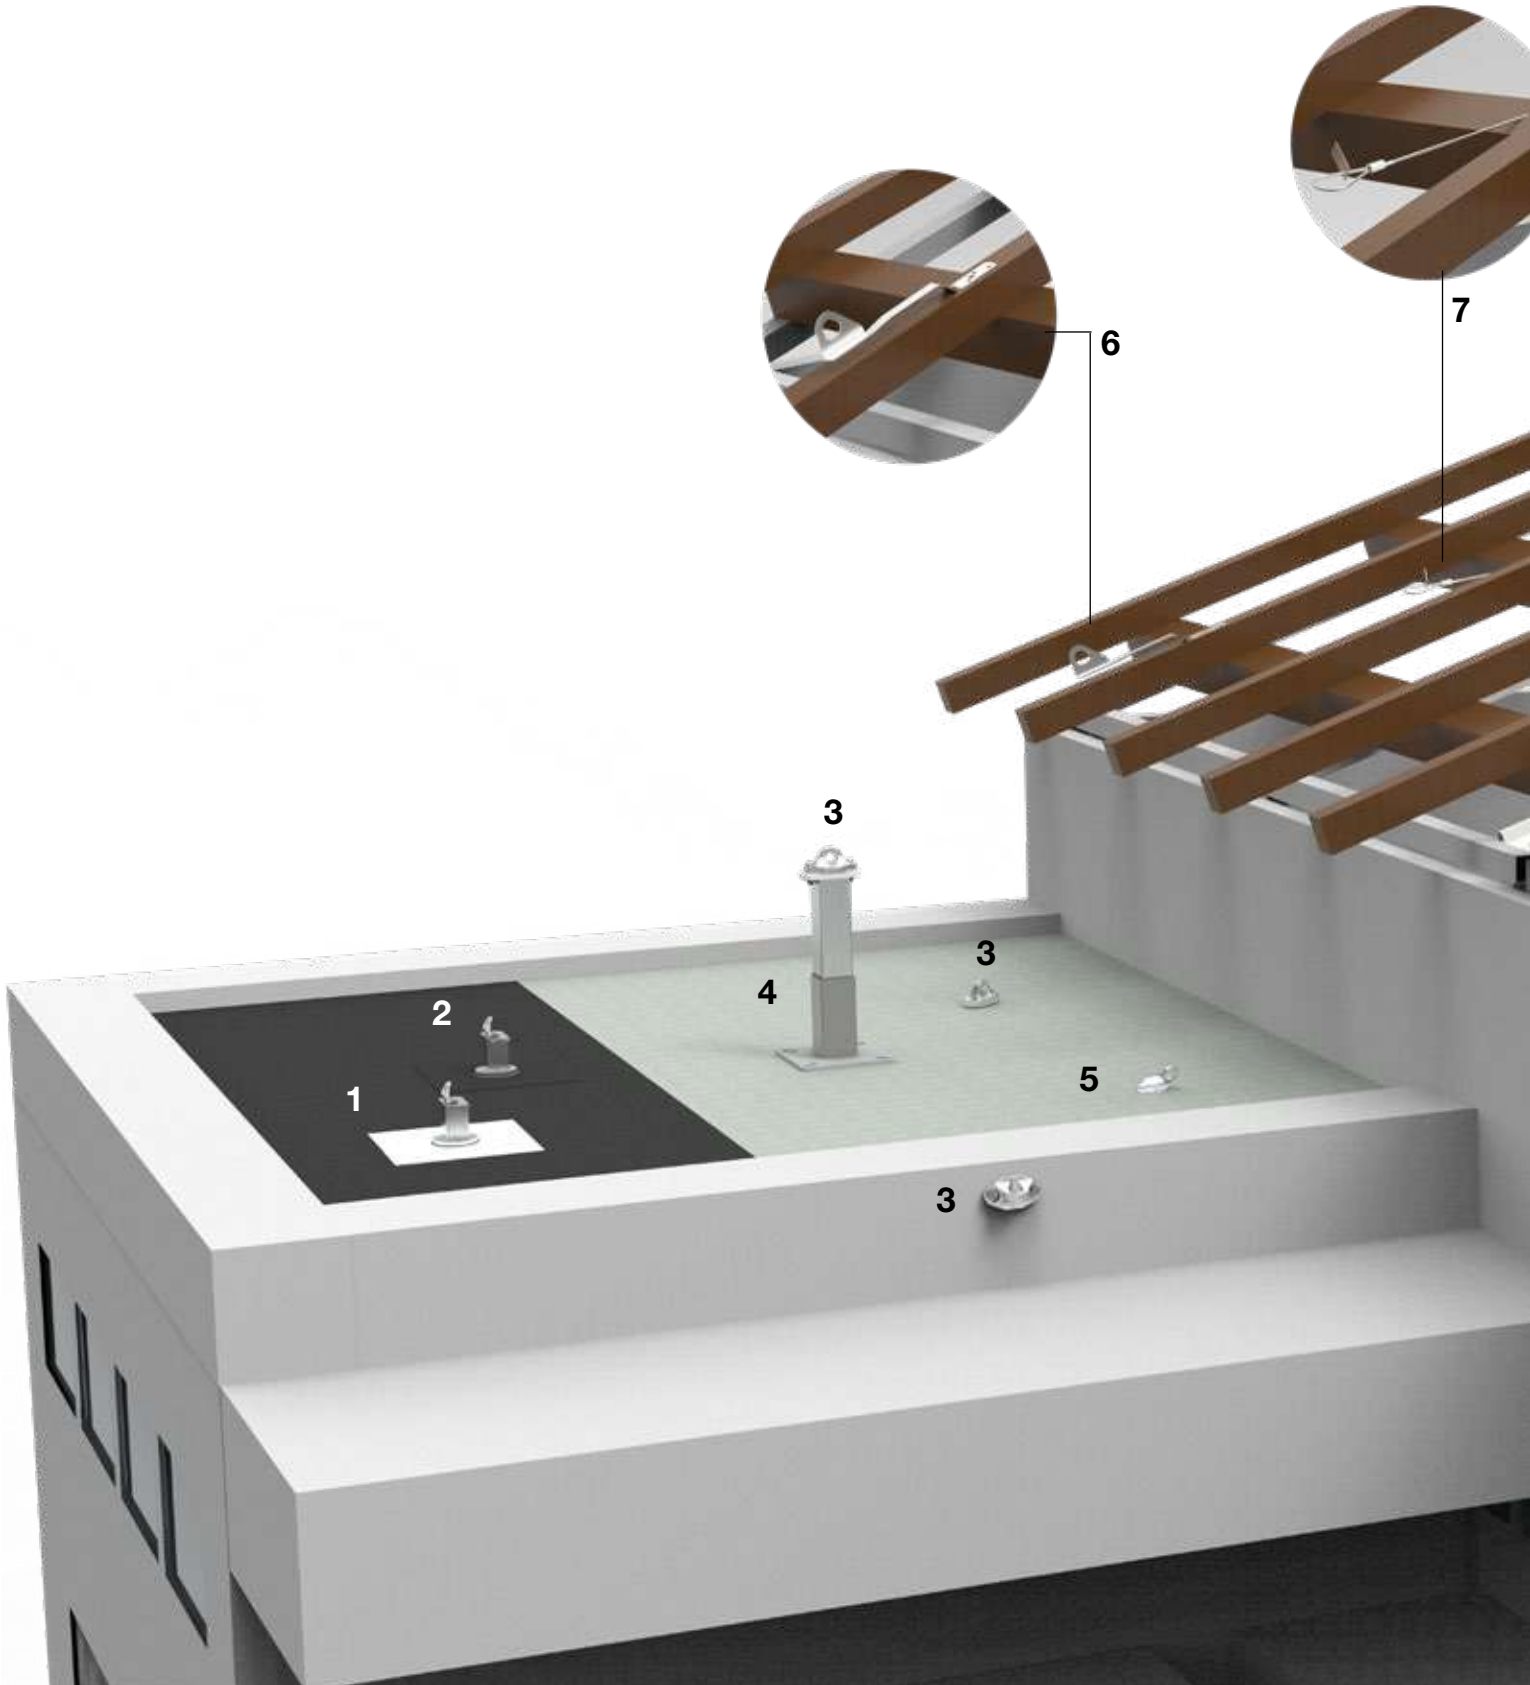

6 NEW PINKO

Anchor point under tile

7 PINKO FLEX

Anchor point under tile

8 AP36

Anchor point for corrugated sheet

9 SPS-ALU-C


Hut support with aluminium anchor point

10 AP36K

Anchor point for standing seam sheet with clamp type E, B, Z

11 AP35

Anchor point for double standing seam

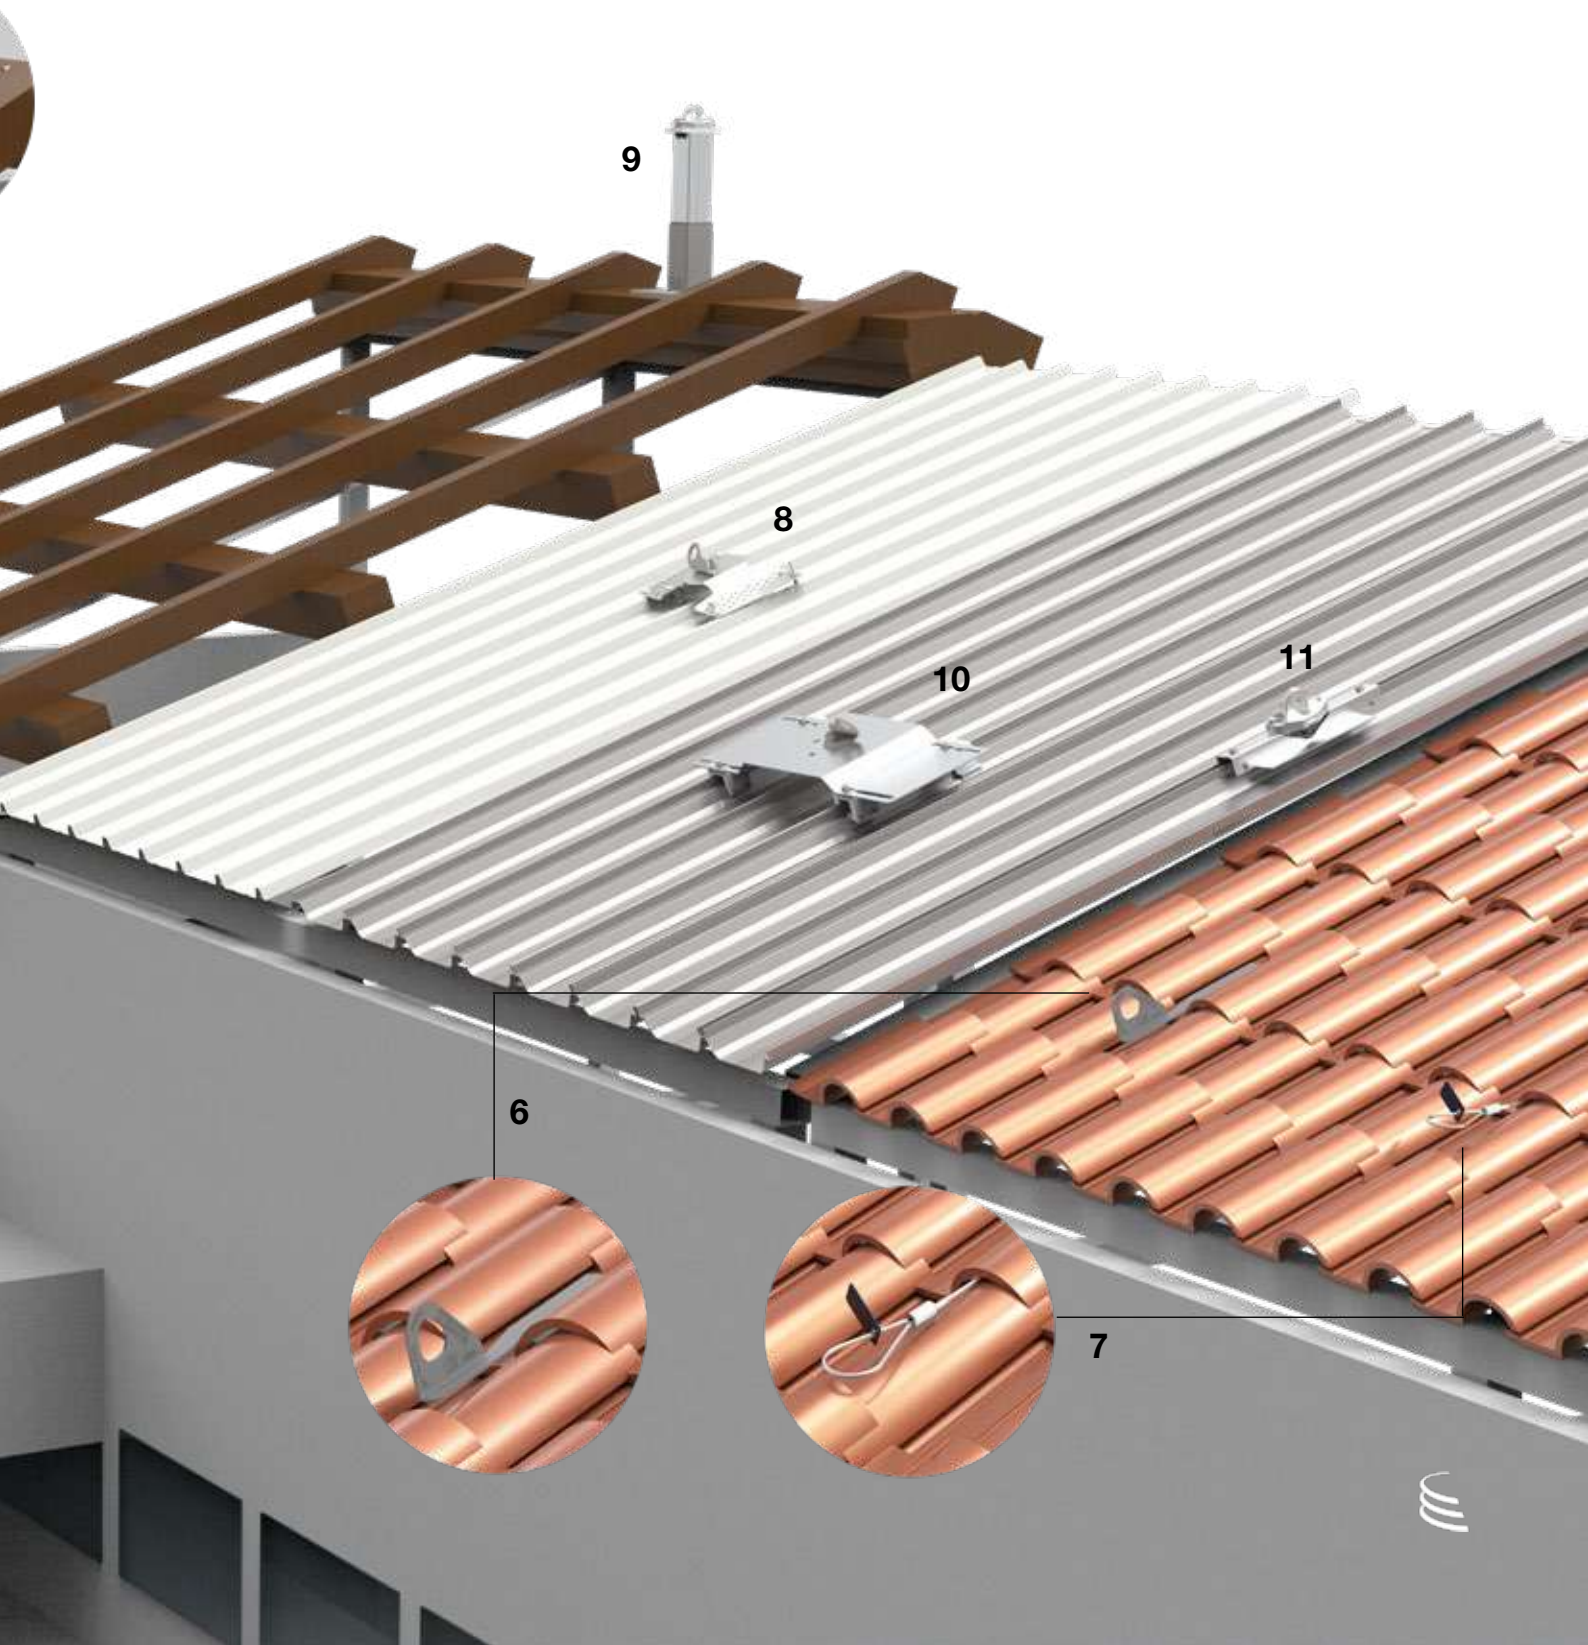

Anchor points
Components

Cod. 351-1001-0012
ALU12



Anchor point for 2 operators, also suitable as support for lifelines complying with EN 795 Type B.
Material: die-cast aluminium

Cod. 351-2001-0012
EAR12



Anchor point for the protection of an operator.
Material: stainless steel

Cod. 351-2001-0001
NEW PINKO



Anchor point for one operator suitable for sloping tile or pantile roofs.
Material: stainless steel

Cod. 351-1001-0601
PINKO FLEX



Under-roof tile anchor point for an operator suitable for horizontal roofs with a maximum slope of 15° made of tiles, roof tiles, and slate.
Material: stainless steel

Cod. 351-2002-0036
AP36



Anchor point for one operator suitable for corrugated sheet metal.
Material: stainless steel
Dimensions: 371 x 230 x 40 mm

Cod. 351-5002-0035
AP35



Anchor point for one operator suitable for aluminium sheet metal roofing with double standing seam.
Material: stainless steel plate; aluminium alloy anchor point, aluminium clamps
Dimensions: 350 x 118 x 42 mm (dimensions may vary depending on clamp)

Cod. 351-1001-0001

SPS-ALU



Support with anchor point for 2 operators.
Material: aluminium

Cod. 351-1001-0003

SPS-ALU-C



Gabled support with anchor point for 2 operators.
Material: aluminium

Cod. 351-5001-3500

AP500-EAR12



Anchor point for one operator suitable for bituminous sheathing roofing. Ensures waterproof fixing and reduces installation time. Can be fixed on surfaces of limited thickness in COP using the special kit consisting of 4 anchors.

Cod. 351-5001-4500

AP500-PVC-EAR12



Anchor point for one operator suitable for PVC sheathing roofing. Ensures waterproof fixing and reduces installation time. Can be fixed on limited thickness CAP surfaces using the special kit consisting of 4 anchors.

Cod. 351-2003-0536

ML-25-550-1-EAR12



Plate with EAR12 2.0 anchor point for two operators and clamps for Riverclack roofing.

Cod. 312-0600-0004

AP11



Flashing to protect all supports with a post section of 80 x 80 mm. An adhesive foam of 5 mm thickness is provided, which, placed between the post surface and the two flanges, prevents possible water infiltration.
Dimensions: 151 x 151 x 30 mm (maximum footprint)

Cod. 351-2003-0236

AP36K-E

Cod. 351-2003-0136

AP36K-B

Cod. 351-2003-0336

AP36K-Z



Anchor point for one operator suitable for standing seam roof with clamp type E, B, or Z.
Material: stainless steel
Dimensions: 645 x 250 x 30 mm



TYPE E



TYPE B



TYPE Z









Lifelines



Genesi's type C anchoring devices are designed to be safe, ergonomic, and easy to install and use.
Genesi lifelines are made entirely of stainless steel or with aluminium elements to find the best solution to the environmental resistance requirements of the place of installation and use.
Genesi offers a range of lines with deformable or non-deformable energy absorbers to provide the best safety depending on the application, the required operation, and the strength of the structure on which the system is to be installed.
Another variable that must be taken into due consideration when choosing a lifeline is the maximum number of operators that can be at height at the same time; depending on the type, Genesi devices allow the protection of up to 4 operators at the same time.
For all our lifelines, a complete range of accessories and supports are available to combine application requirements with the best ergonomic and safety results.



Trilob lifeline
pag. 98

Libera lifeline
pag. 108

Exagon lifeline
pag. 120

Allukemi Plus lifeline
pag. 130

Types

Deformable: Ideal for all types of structures, thanks to the high deformability that dissipates energy in the event of a fall. Part of this type are the lines: Trilob (4 operators), Libera (2/3 operators), and Exagon (3 operators).
Non-deformable: Ideal for structures with high load-bearing capacity. Part of this type is the line Allukemi Plus (4 operators).

Compliance

- EN 795:2012 Type C
- CEN/TS 16415:2013 Type C
- UNI 11578:2015



Trilob lifeline

The Genesi Trilob lifeline complies with EN 795:2012 Type C, CEN/TS 16415:2013, and UNI 11578:2015 standards and can be used by up to 4 operators simultaneously. It is an extremely high-performance anchor made with components in micro-cast stainless steel, combining lightness with excellent mechanical and corrosion resistance.

The energy absorber, with outstanding performance, allows installation even on metal roofs with limited thickness, as its high deformability dissipates kinetic energy in the event of a fall.

Thanks to the use of the TRI100 shuttle, tested with the system, operators can easily, smoothly, and uninterruptedly pass the intermediate element. The Trilob lifeline can also be used with a double lanyard instead of the shuttle.

The reduced size of its elements ensures low visual impact, and the wide range of available supports makes the Genesi Trilob lifeline extremely versatile and ideal for securing all types of buildings, including those of high historical and architectural value, with particular geometries and on non-linear paths.



Features


- Up to 4 operators simultaneously
- Up to 15 meters span
- Mechanical cable connection without crimping
- Intermediate element collapse in case of a fall
- Low loads on structures in case of a fall. Inclination-adjustable elements
- Constant tension over time
- Possibility to create a “closed loop” without absorber
- Simplicity and speed of installation
- Minimal visual impact
- Wide range of supports and possibility to design them ad hoc
- Possibility of direct installation on the structure
- Noble materials



Compliance

- EN 795:2012 Type C
- CEN/TS 16415:2013 Type C
- UNI 11578:2015

Trilob lifeline

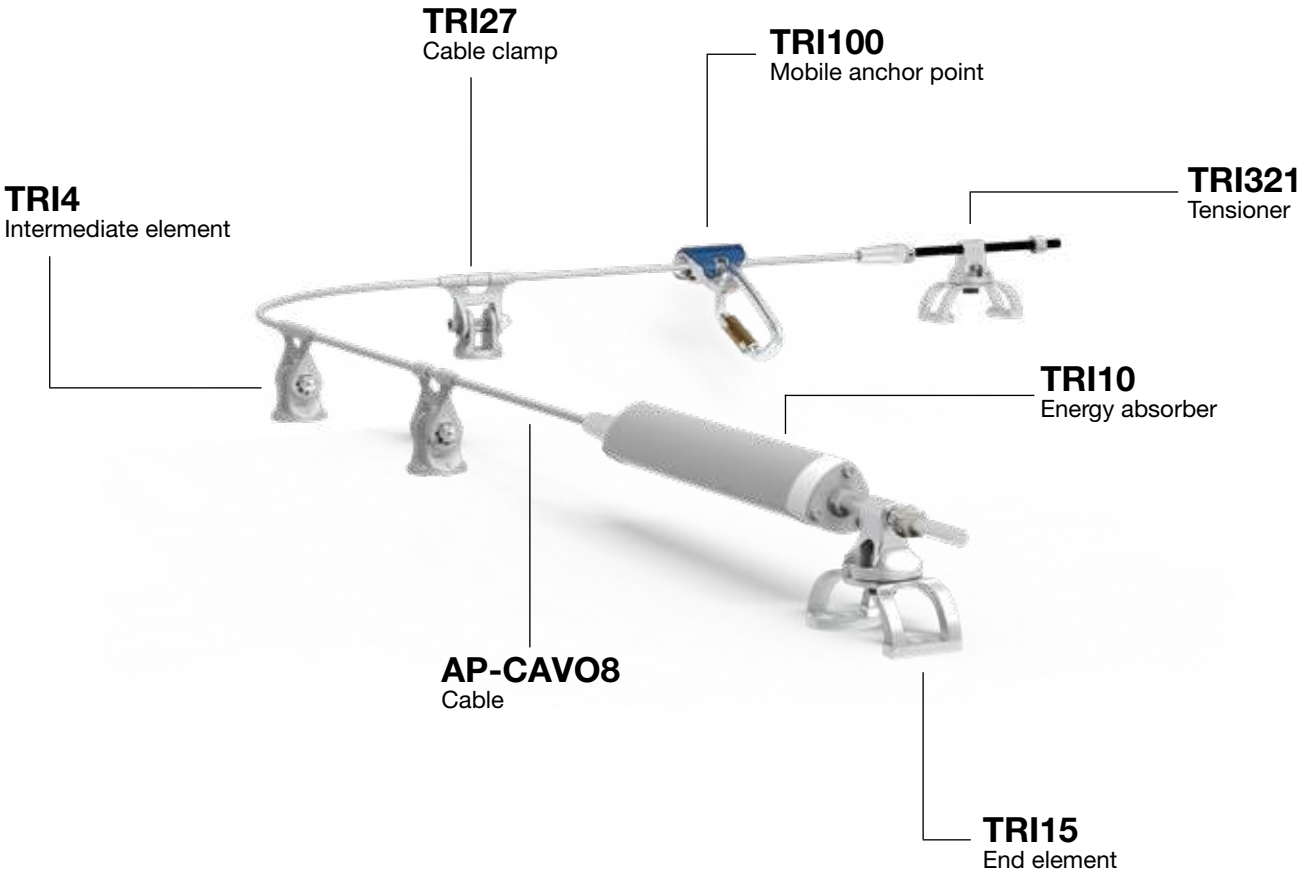

Cod. 312-0500-0001

TRI10



Energy absorber/block to reduce kinetic energy in the event of a fall, cushioning the impact. It also functions as a tensioner for the correct tensioning of the cable.

Cod. 313-0500-0002

TRI100



Mobile anchor point that allows overcoming intermediate elements and changes of direction without interruptions in the path. The shuttle can be inserted at any point in the system, and the EN362 connector, positioned in the lower housing, prevents accidental release.
Material: steel

Cod. 312-0500-0002

TRI15



End element with a swivel head designed to follow the deformation of the cable in the event of a fall, this movement minimizes stress on the anchorage device elements.
Material: stainless steel

Cod. 312-0500-0006

TRI4



Intermediate element that, in combination with the appropriate shuttle, allows a safe and uninterrupted passage along the path.
Material: stainless steel

Cod. 312-0500-0003

TRI27



Cable clamp to be inserted in the intermediate when there is an angle or when the line length exceeds 60 m.

Cod. 312-0500-0005

TRI321



Tensioner for locking and tensioning the cable.
Material: stainless steel

Trilob lifeline

Cod. 611-1001-0000
AP-CAVO8



Cable that allows the operator to move safely along its entire path. A blue strand and a band marked Genesi identify the original cables.
Material: stainless steel

Cod. 312-0100-0007
ADA80



Adapter for installing the intermediate elements of the Trilob line to the AP50, AP50C, and AP100 poles. It is fixed to the pole using 4 self-tapping screws, equipped with a washer and EPDM gasket.
Material: stainless steel

Cod. 312-0500-0008
PIATTELLO-SUP-K




Adapter for installing the end elements of the Trilob line to poles with a section of 80 x 80 mm. It is fixed to the pole using 4 self-tapping screws, equipped with a washer and EPDM gasket.
Material: aluminium alloy

Cod. 314-3003-0003
EXA20-K



Bracket designed for walls in reinforced concrete and structures in steel or wood. Bracket with dimensions 170 x 170 mm and a thickness of 8 mm.
Material: cataphoretic and painted steel

Cod. 314-5005-0001
AP50



Flat base support to be used with the ADA80 adapter for all line components. It consists of a pole with a maximum height of 50 cm, adjustable on site, and a socket base.
Material: cataphoretic steel base and aluminium pole

Cod. 314-5005-0005
AP50C



Gabled base support to be used with the ADA80 adapter for all line components. It consists of a pole with a maximum height of 50 cm, adjustable on site, and a socket base shaped like a gable for roofs with a maximum slope of 30%.
Material: cataphoretic steel base and aluminium pole

Cod. 314-2005-0029

ML-2-550-2-K



Plate for mounting end elements of the Trilob line with clamps for Riverclack 550 cover.

Cod. 314-2005-0030

ML-2-550-1-K



Plate for mounting Exagon and intermediate Trilob elements with clamps for Riverclack 550 cover.

Cod. 612-1001-0031

CP-AP



Counter plate CP-AP designed for the application of AP100, AP50, and AP50C supports.
Material: cataphoretic steel

Cod. 314-2005-0013

PL23



Plate for corrugated sheet metal roofing adaptable to different corrugation pitches, from 240 to 390 mm.
Material: stainless steel

Cod. 314-2005-0016

PL25-E

Cod. 314-2005-0015

PL25-B

Cod. 314-2005-0017

PL25-Z





TYPE E



TYPE B



TYPE Z

Plate for standing seam sheet metal adaptable to different corrugation pitches, from 350 to 610 mm, fixed using 4 S-5 clamps with type E, B, or Z clamp.
Material: stainless steel

Cod. 312-0600-0004

AP11



Flashing to protect all supports with a post section of 80 x 80 mm. An adhesive foam with a thickness of 5 mm is provided, which, placed between the post surface and the two flanges, prevents possible water infiltration.
Dimensions: 151 x 151 x 30 mm (maximum footprint)

Cod. 314-5001-0001

AP100



Flat base reinforced support to be used with the ADA80 adapter for all line components. It consists of a post with a maximum height of 100 cm, adjustable on site, and a cup base with a truncated pyramidal lateral surface.
Material: base in cataphoretic steel and post in aluminium.

Trilob lifeline

Supports

1 **AP50C**

Base support with a tent shape

2 **AP50**

Flat base support

3 **PL23**

Plate for corrugated sheet metal

4 **PL25**

Plate for seamed sheet metal
with clamp type E, B, Z

5 **EXA20**

Bracket support


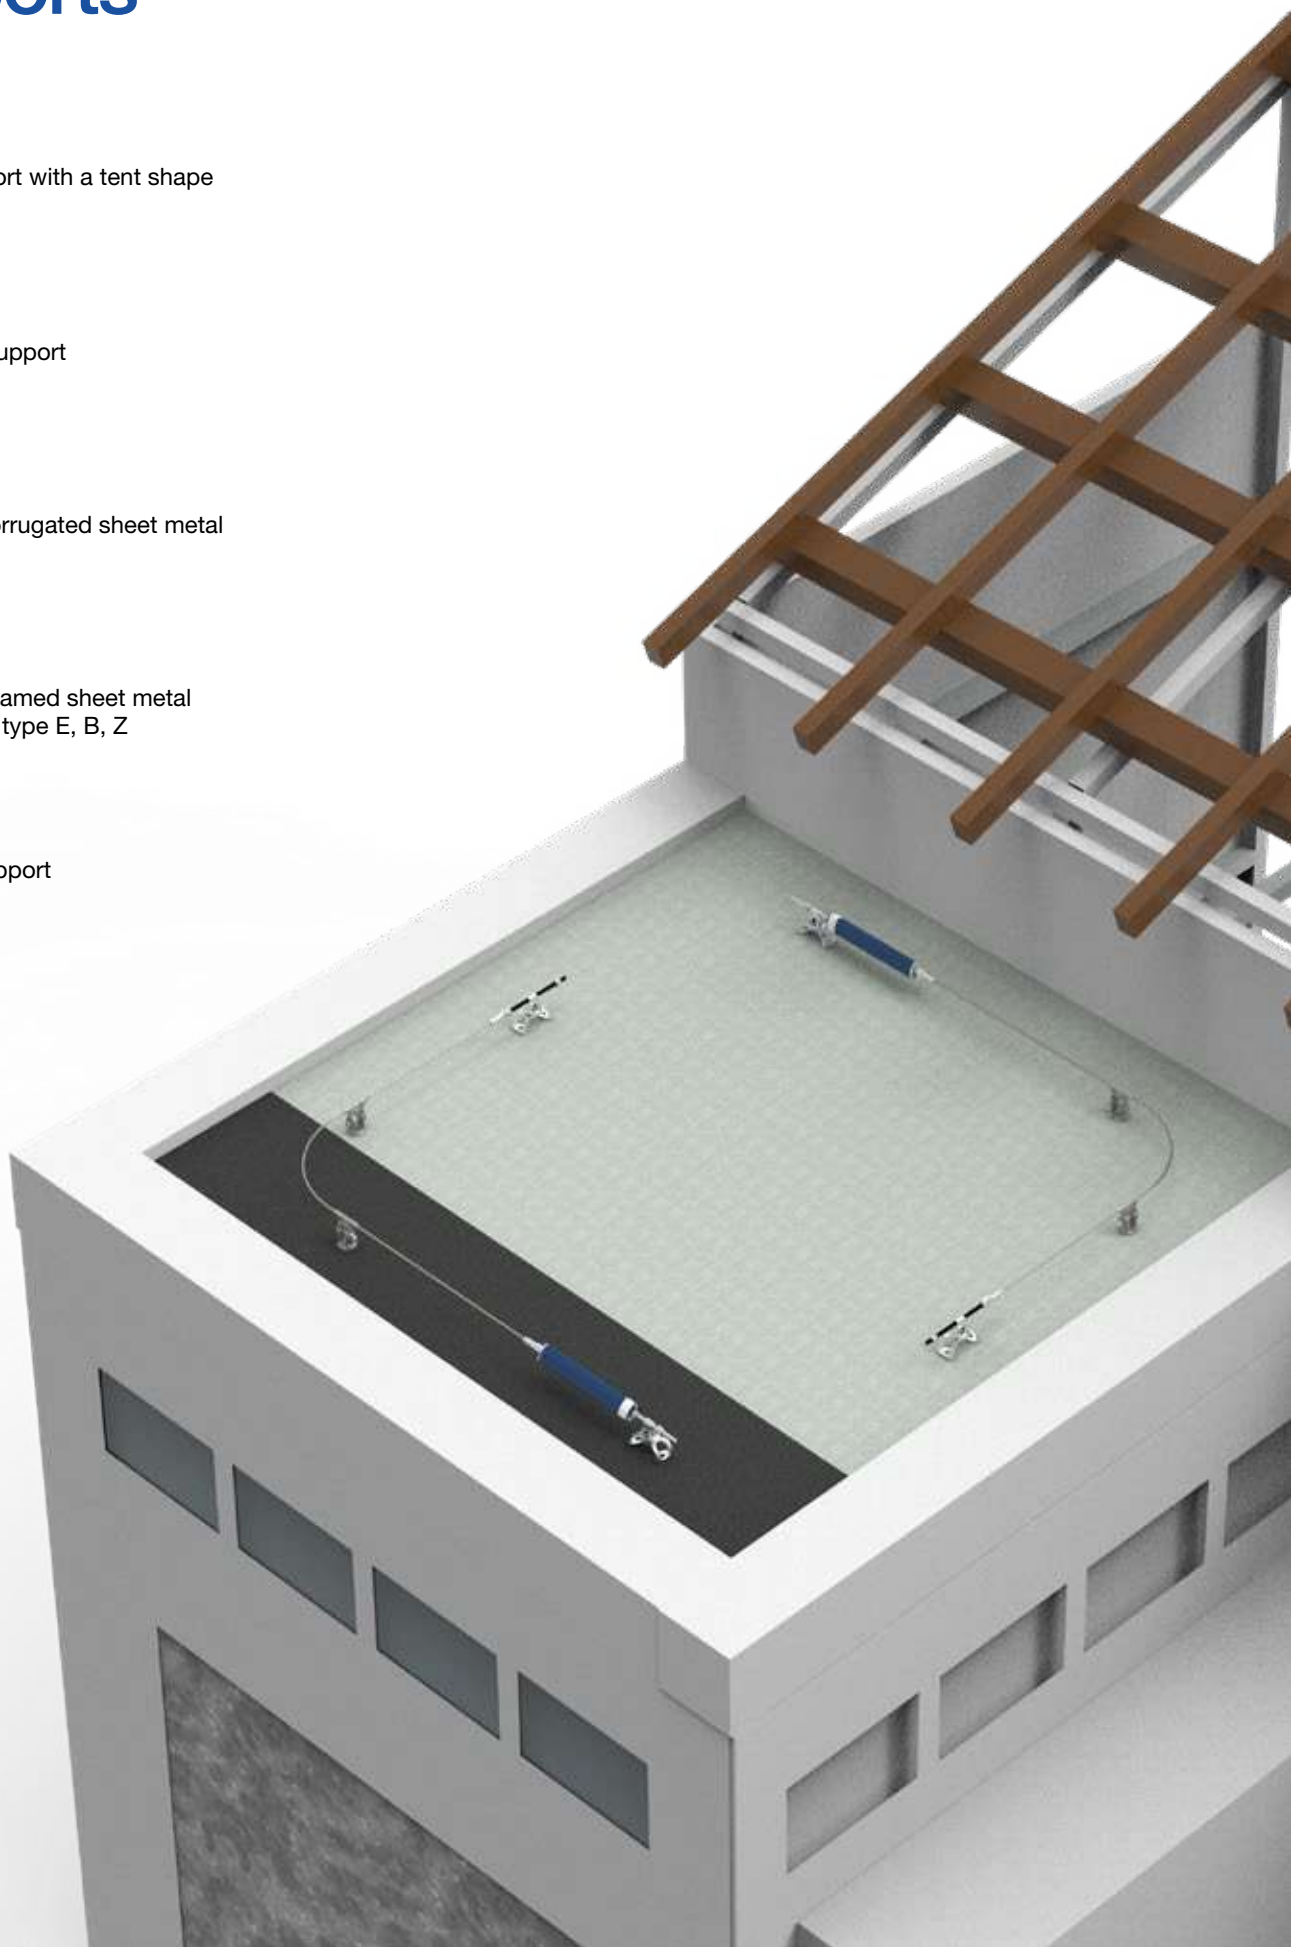


Image for illustrative purposes only. Lifelines can be used on surfaces with an inclination up to 15°. Blue anodized absorber available upon request.







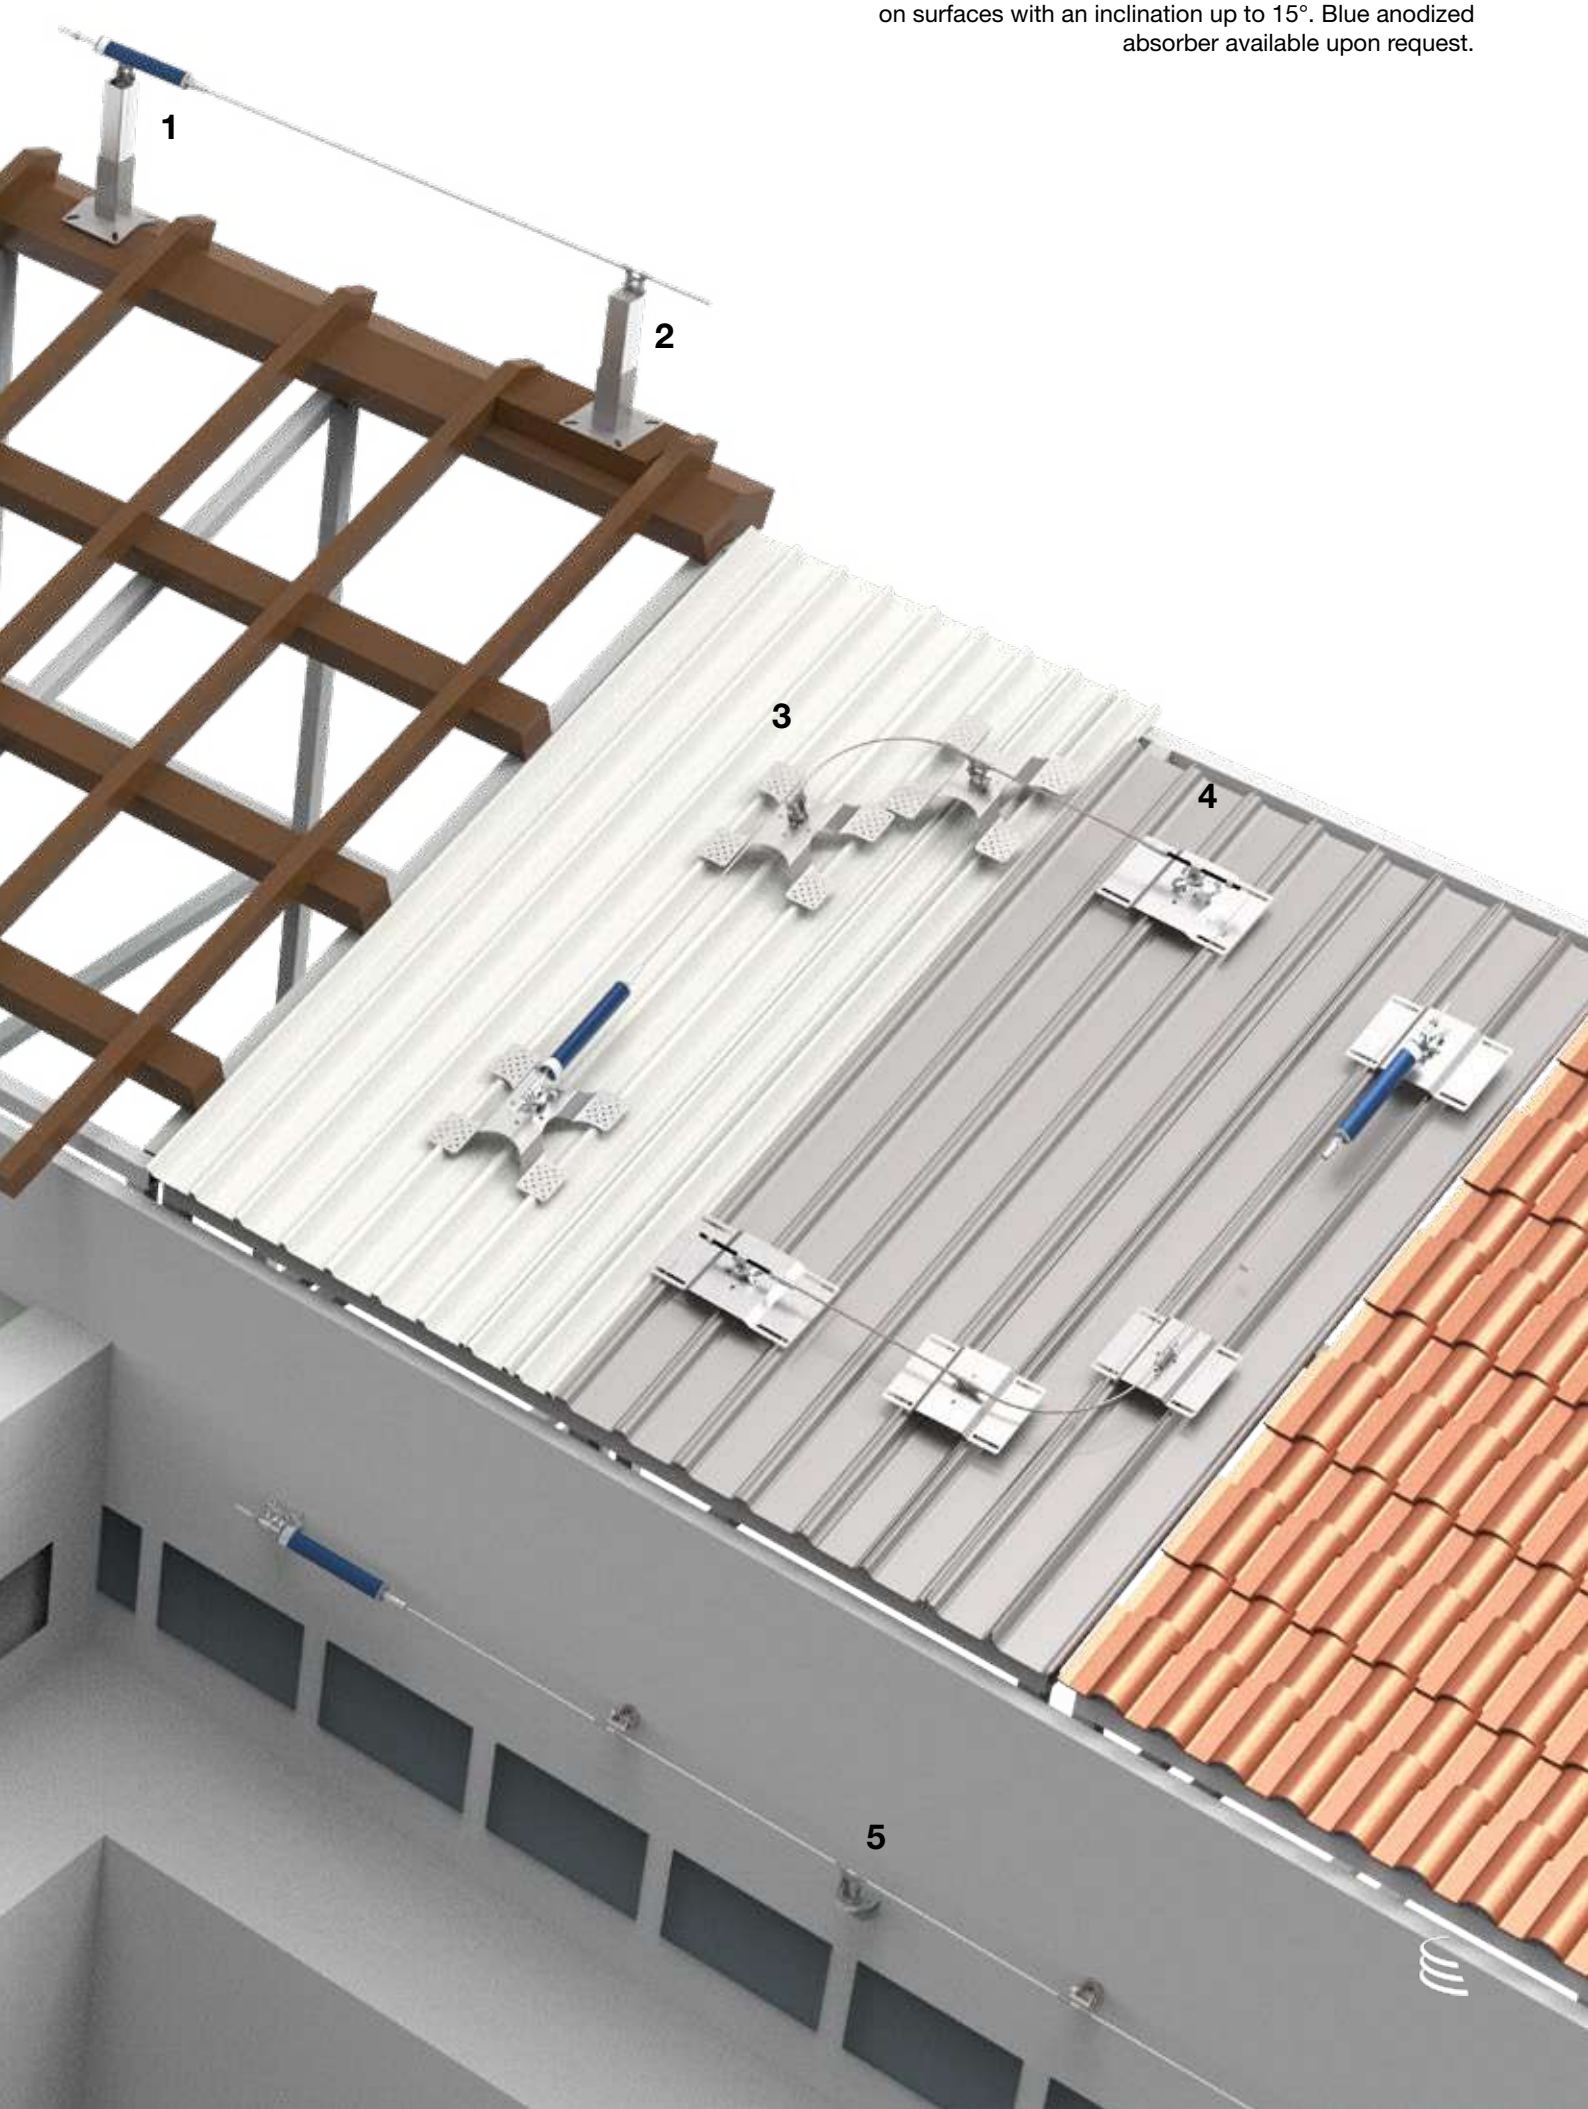





Libera lifeline

The Genesi Libera lifeline is a flexible anchorage line compliant with the technical standard EN 795:2012 Type C and can be used by 2 operators simultaneously, in accordance with the technical specification CEN/TS 16415:2013, and by 3 operators in accordance with UNI 11578:2015.

The components of Genesi Libera are made of die-cast aluminium alloy, combining lightness with mechanical and corrosion resistance.


With the Genesi Libera lifeline, the operator can move smoothly along the entire path, easily overcoming the sinusoidal-shaped intermediates directly with the connector of their own lanyard.

A versatile line ideal for securing industrial and residential roofs.



Features


- Mechanical cable connection without crimping
- Wide range of supports and the possibility to design them ad hoc
- Certified for 2 operators (CEN/ TS 16415:2013) or 3 operators (UNI 11578:2015)
- Excellent performance
- Minimal visual impact
- Adaptability to any type of coverage
- Simplicity and speed of installation
- Up to 15 meters span
- Low loads on the structure in case of a fall
- Possibility to pass over intermediates directly with the connection carabiner to the line

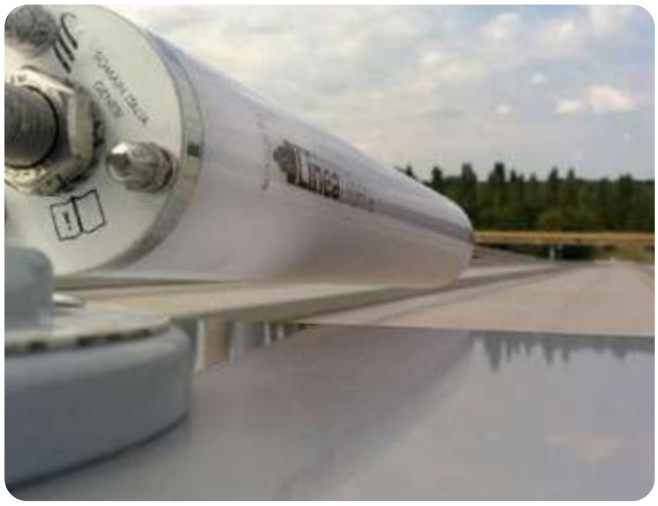

Compliance

- EN 795:2012 Type C
- CEN/TS 16415:2013 Type C
- UNI 11578:2015

Libera lifeline

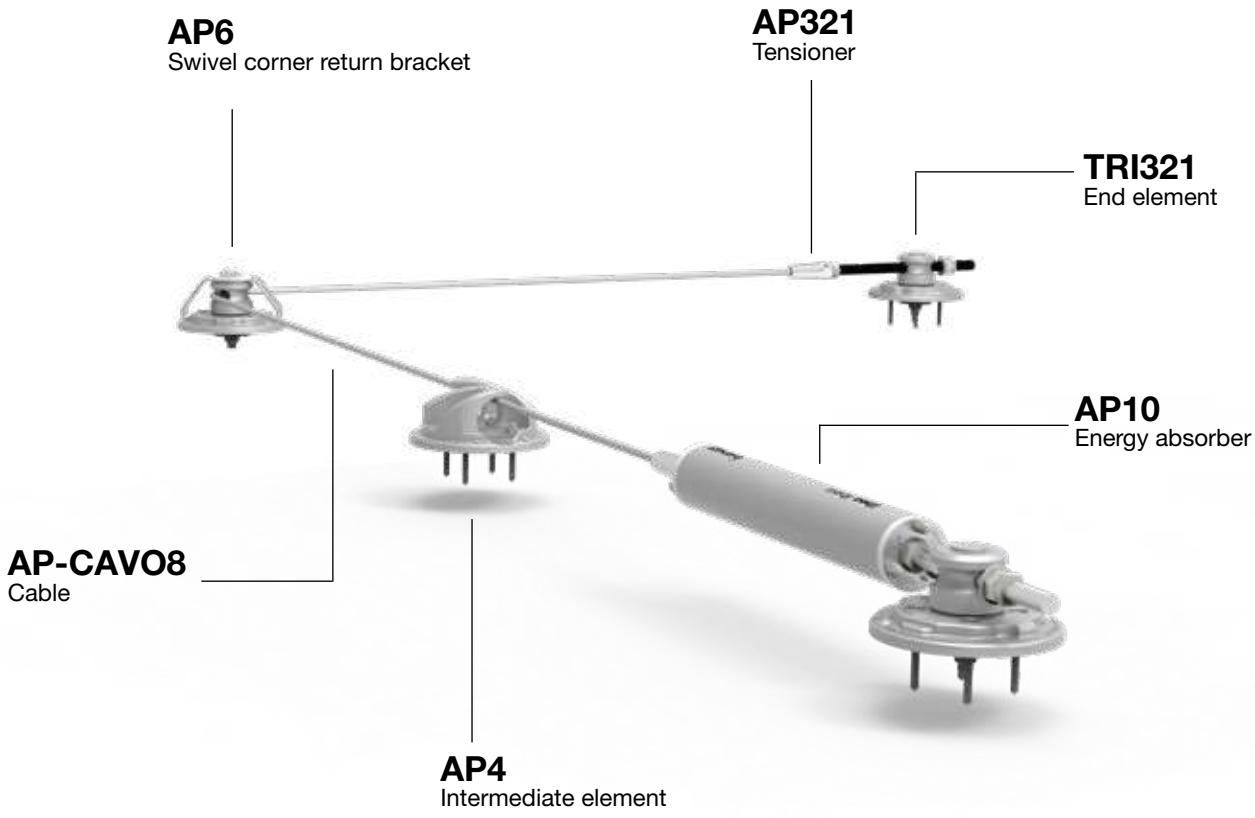



Cod. 312-0600-0001

AP10

Energy absorber/block to reduce kinetic energy in case of a fall, mitigating the impact. It also functions as a tensioner for the correct tensioning of the cable.



Cod. 312-0600-0013

AP6

Swivel corner return bracket that prevents accidental cable exit at direction changes. The bracket is positioned in the rotating body of the AP15 element using a specially turned stainless steel screw.
Material: stainless steel



Cod. 312-0600-0005

AP15

End element that allows creating the starting and ending point of the lifeline. It is fixed on standard end supports, on specially designed supports, and on PA and PAM plates for wall applications.
Material: aluminium alloy



Cod. 312-0600-0010

AP4

Intermediate element installable in straight sections at intervals not exceeding 15 m, allows the passage of the connector through a sinusoidal movement. It can be fixed on standard intermediate supports, both special ones and on PIA and PAM plates.
Material: aluminium alloy



Cod. 611-1001-0000

AP-CAVO8

Cable that allows the operator to move safely along its entire path. A blue strand and a Genesi-marked band identify the original cables.
Material: stainless steel



Cod. 312-0600-0009

AP321

Tensioner for cable locking and tensioning.
Material: stainless steel

Libera lifeline

Cod. 314-1005-0001

PA-53



Plate for end and corner return elements used as support in wall or flat installations.
Material: aluminium alloy

Cod. 314-1005-0009

PIA-53



Plate for intermediate elements used as support in wall or flat installations.
Material: aluminium alloy

Cod. 314-1005-0006

PAM



Universal wall plate for all lifeline elements and used in the presence of internal angles in the installation walls.
Material: aluminium alloy

Cod. 314-1005-0005

PAE



Bracket support for all lifeline elements and used in the presence of external angles in the installation walls.
Material: aluminium alloy

Cod. 314-1005-0004


PAD



Double plate used as support for two elements and is particularly useful in the case of crossing two distinct lifelines.
Material: aluminium alloy

Cod. 314-5005-0001

AP50



Flat base support for all line components. It consists of a pole with a maximum height of 50 cm, adjustable on site, and a cup base.
Material: base in cataphoretic steel and pole in aluminium

Cod. 314-5005-0005

AP50C



Flat base support for all components of the line. It consists of a pole with a maximum height of 50 cm, adjustable on site, and a cup-shaped base with a gable shape for roofs with a maximum slope of 30%.
Material: cataphoretic steel base and aluminium pole

Cod. 314-5001-0001

AP100



Reinforced flat base support to be used with the ADA80 adapter for all components of the line. It consists of a pole with a maximum height of 100 cm, adjustable on site, and a cup-shaped base with a truncated pyramidal lateral surface.
Material: cataphoretic steel base and aluminium pole

Cod. 314-5005-0003

AP500-PVC



Support for PVC sheath that ensures waterproofing of the fixing and reduces installation times. It can be fixed on surfaces of limited thickness in CAP using the appropriate kit consisting of 4 anchors.

Cod. 314-5005-0002

AP500-BIT



Support for bituminous sheath that ensures waterproofing of the fixing and reduces installation times. It can be fixed on surfaces of limited thickness in COP using the appropriate kit consisting of 4 anchors.

Cod. 312-0600-0004

AP11



Flashing to protect all supports with a pole section of 80 x 80 mm from water. An adhesive foam with a thickness of 5 mm is provided, which, placed between the pole surface and the two flanges, prevents possible water infiltration.
Dimensions: 151 x 151 x 30 mm (maximum footprint)

Cod. 314-5005-0016

AP500-ANC



Kit of 4 anchors to fix AP500 in the presence of insulation.

Libera lifeline

Cod. 661-3003-0005
AP500-DIST



Kit of 4 spacers for AP500 in the presence of insulation.

Cod. 314-2001-0001
AP23



Plate for corrugated metal sheet roofing adaptable to different corrugation pitches, from 240 to 390 mm.
Material: stainless steel

Cod. 612-1001-0031
CP-AP



Counter plate designed for the application of AP100, AP50, and AP50C supports.
Material: cataphoretic steel

Cod. 314-2001-0004
AP25K-E

Cod. 314-2001-0003
AP25K-B

Cod. 314-2001-0005
AP25K-Z



Plate for standing seam metal roofing adaptable to different corrugation pitches, from 350 to 610 mm, fixed using 4 S-5 clamps with E, B, or Z type pliers.
Material: stainless steel



TYPE E



TYPE B



TYPE Z



Libera lifeline
Supports

1 **AP50C**

Base support with tent shape

2 **AP50**

Flat base support

3 **AP23**

Plate for corrugated sheet metal

4 **AP25**

Plate for seamed sheet metal with clamp type E, B, Z



Image for illustrative purposes only. Lifelines can be used on surfaces with an inclination up to 15°. Blue anodized absorber available upon request.

5 PAD


Double plate


6 PAE

External angle plate

7 PAM

Plate for intermediate elements

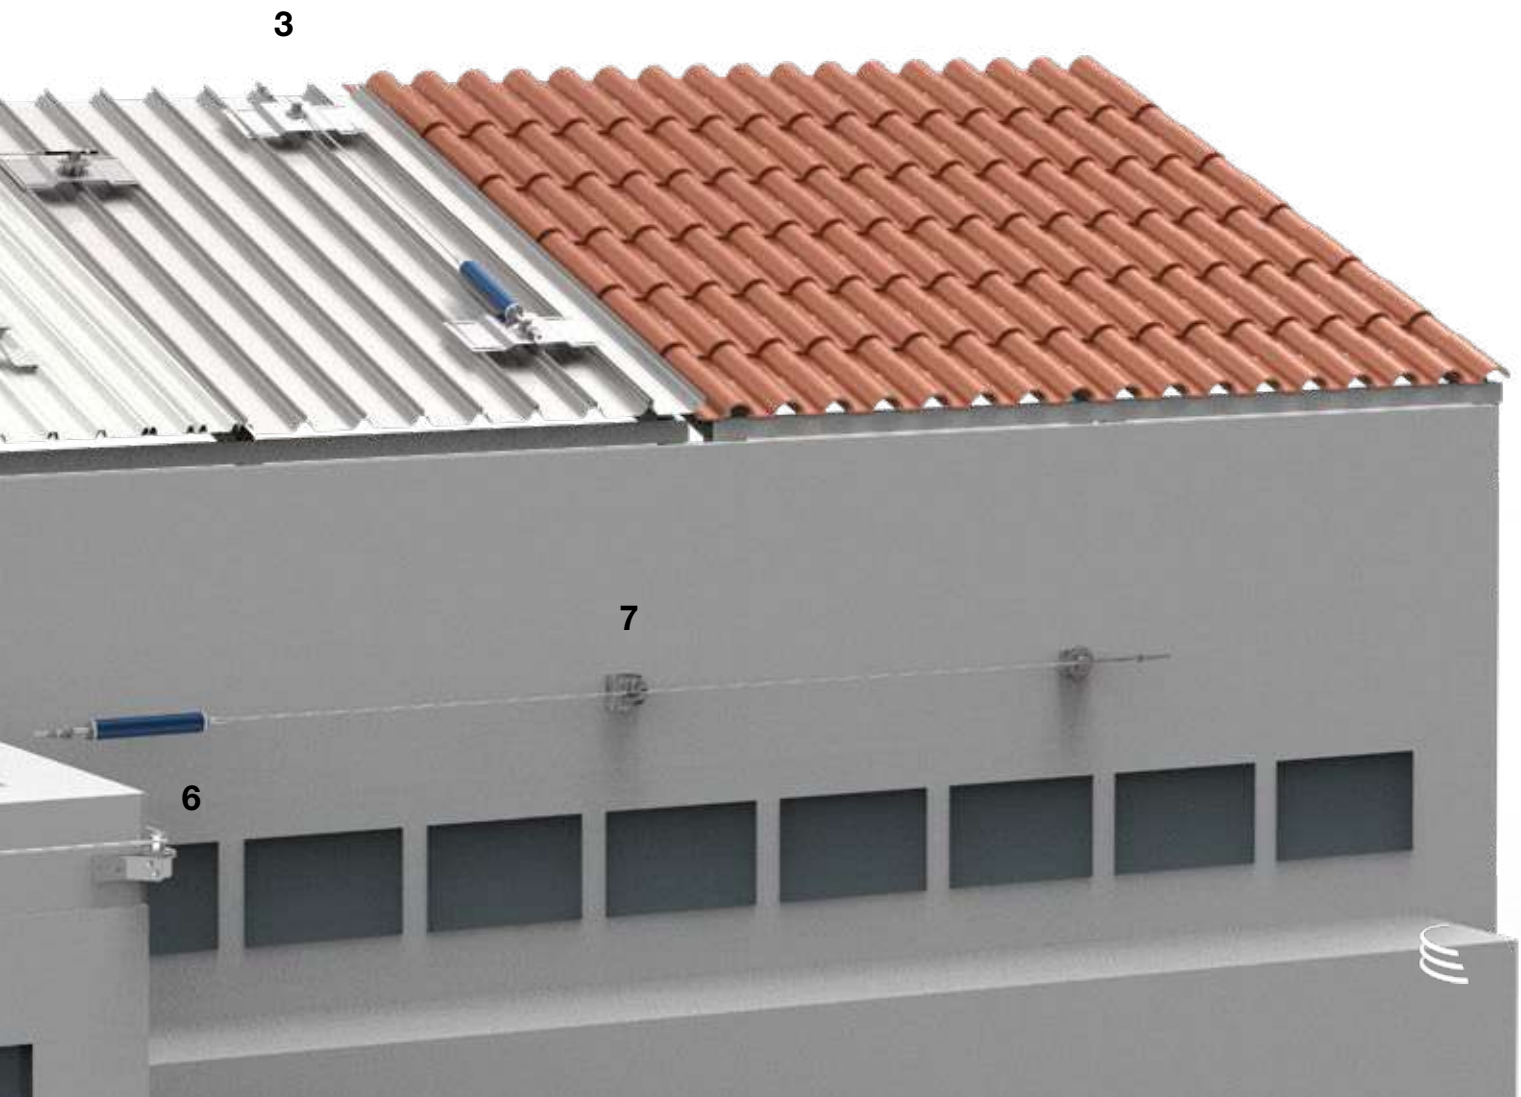

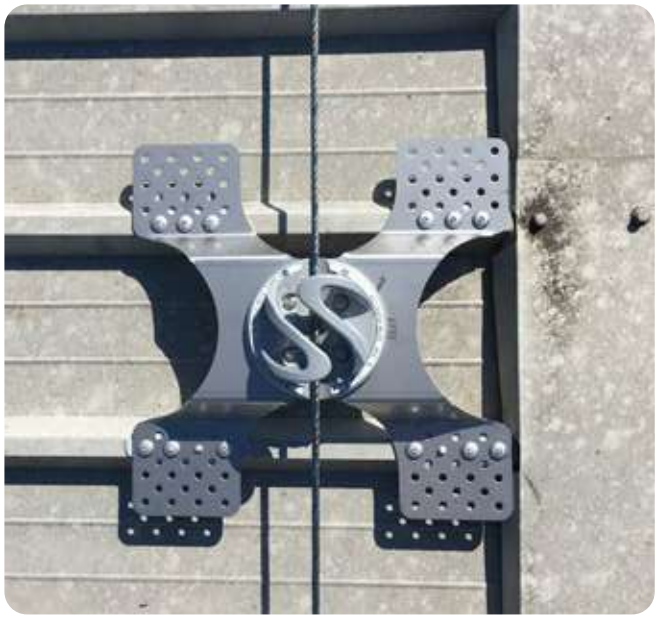









Exagon lifeline

The Genesi Exagon lifeline is an anchoring device kit available in 15, 30, and 45 meters, compliant with the technical standard EN 795:2012 Type C and can be used by 3 operators simultaneously, in accordance with the technical specification CEN/TS 16415:2013 and UNI 11578:2015.

A complete and ready-to-install solution, designed to best combine high technical performance and holding performance with ease of assembly and the availability of all essential components in a single kit.

Safety and practicality for a kit that is easy and quick to install.



Features


- Mechanical cable connection without crimping
- 3 operators simultaneously
- Possibility of direct fixing to the structure
- Guarantee of constant tension over time
- Reduced loads on structures in case of fall
- Reduction of installation times
- Custom design of supports
- Simplicity and speed of installation
- Noble materials
- Reduced visual impact.



Compliance

- EN 795:2012 Type C
- CEN/TS 16415:2013 Type C
- UNI 11578:2015

Exagon lifeline

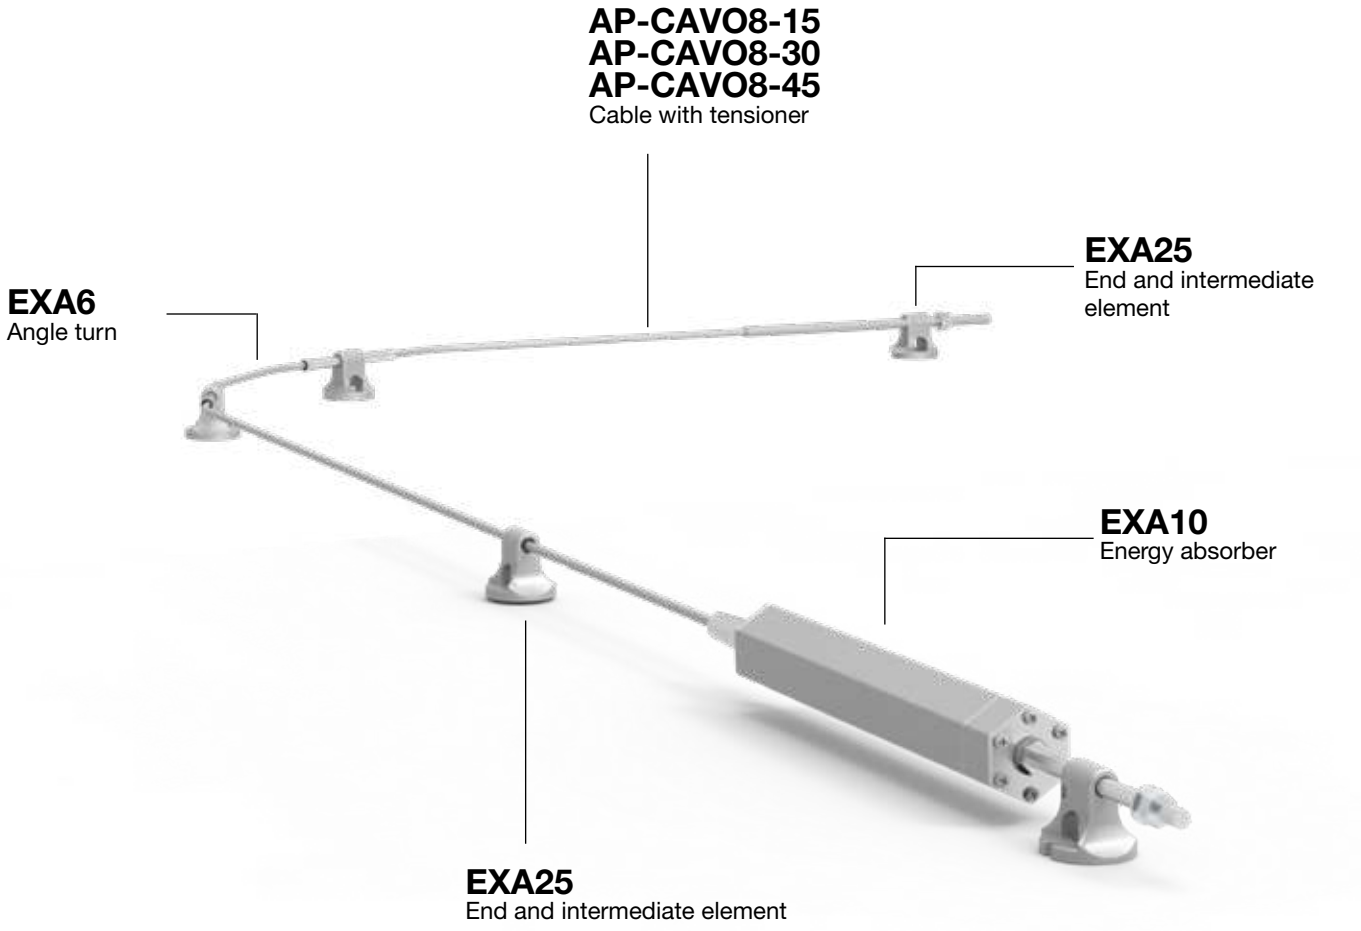

Cod. 311-0100-0015

EXA-KIT15



The safety kit for 15 m includes:
- 2 EXA25 elements
- 15 m of cable with 8 mm diameter with tensioner
- 1 EXA10 energy absorber
- 1 Mandatory sign CA00
- Manufacturer's information note

Cod. 311-0100-0030

EXA-KIT30



The safety kit for 30 m includes:
- 3 EXA25 Elements
- 30 m of cable with 8 mm diameter with tensioner
- 1 EXA10 energy absorber
- 1 Mandatory sign CA00
- Manufacturer's information note

Cod. 311-0100-0045

EXA-KIT45



The safety kit for 45 m includes:
- 4 EXA25 elements
- 45 m of cable with 8 mm diameter with tensioner
- 1 EXA10 energy absorber
- 1 Mandatory sign CA00
- Manufacturer's information note

Cod. 312-0100-0004

EXA6



Pair of elements that allow for an angle in the Exagon line.
Material: stainless steel

Exagon lifeline

Cod. 312-0100-0007
ADA80




Adapter for installing intermediate elements of the Trilob line to the AP50, AP50C, and AP100 poles. It is fixed to the pole using 4 self-tapping screws, equipped with a washer and EPDM gasket.
Material: stainless steel

Cod. 314-3003-0003
EXA20-K



Bracket support designed for walls in reinforced concrete, steel, or wood structures. Bracket with dimensions 170 x 170 mm and a thickness of 8 mm.
Material: cataphoretic and painted steel

Cod. 314-5005-0001
AP50



Flat base support to be used with the ADA80 adapter for all line components. It consists of a pole with a maximum height of 50 cm, adjustable on-site, and a cup base.
Material: cataphoretic steel base and aluminium pole

Cod. 314-5005-0005
AP50C



Gable base support to be used with the ADA80 adapter for all line components. It consists of a pole with a maximum height of 50 cm, adjustable on-site, and a cup base shaped like a gable for roofs with a maximum slope of 30%.
Material: cataphoretic steel base and aluminium pole

Cod. 314-5001-0001
AP100



Reinforced flat base support to be used with the ADA80 adapter for all line components. It consists of a pole with a maximum height of 100 cm, adjustable on-site, and a cup base with a truncated pyramid lateral surface.
Material: cataphoretic steel base and aluminium pole

Cod. 314-5005-0008
EXA50



Flat base support for all line components. It consists of a pole with a height of 50 cm and a cup base.
Material: cataphoretic and painted steel

Cod. 314-2005-0030

ML-2-550-1-K



Plate for mounting Exagon and intermediate Trilob elements with clamps for Riverclack 550 mm cover.

Cod. 612-1001-0031

CP-AP



Counterplate CP-AP designed for the application of supports AP100, AP50, and AP50C. Material: cataphoretic steel

Cod. 314-5005-0009

EXA50C



Gable support for all components of the line. It consists of a pole with a height of 50 cm and a gable-shaped cup base, ideal for ridges in double-pitched steel or reinforced concrete/CLS roofs.
Material: cataphoretic and painted steel

Cod. 314-5005-0010

EXA50S



Support with a narrow base for all components of the line. It consists of a pole with a height of 50 cm and a flat and narrow base ideal for wooden ridges.
Material: cataphoretic and painted steel

Cod. 314-2005-0013

PL23



Plate for corrugated metal sheet roofs adaptable to different corrugation pitches, from 240 to 390 mm.
Material: stainless steel

Cod. 312-0600-0004

AP11



Flashing to protect all supports with a pole section of 80 x 80 mm from water. An adhesive foam with a thickness of 5 mm is provided, which, placed between the pole surface and the two flanges, prevents possible water infiltration.
Dimensions: 151 x 151 x 30 mm (maximum encumbrance)

Cod. 314-2005-0016

PL25-E

Cod. 314-2005-0015

PL25-B

Cod. 314-2005-0017

PL25-Z



Plate for standing seam sheet adaptable to different corrugation pitches, from 350 to 610 mm, fixed using 4 S-5 clamps with type E, B, or Z pliers.
Material: stainless steel



TYPE E



TYPE B



TYPE Z

Exagon lifeline
Supports

1 AP50C

Tent-shaped base support

2 AP50

Flat base support

3 PL23

Plate for corrugated sheet metal

4 PL25

Plate for seamed sheet metal with clamp type E, B, Z

5 EXA20

Bracket support

6 EXA50

Flat base support



Image for illustrative purposes only. Lifelines can be used on surfaces with an inclination up to 15°. Blue anodized absorber available upon request.











Allukemi Plus lifeline

The name Allukemi is derived from the fusion of the words Aluminium and Ukemi. Aluminium is the chosen material to ensure lightness and resistance for the components of this line, while Ukemi is, in some martial arts, the art of knowing how to fall.

Allukemi combines the lightness of aluminium with optimal protection performance in case of a fall.

The Genesi Allukemi Plus lifeline is an anchoring device with a non-deformable energy absorber compliant with EN 795:2012 Type C, CEN/TS 16415:2013, and UNI 11578:2015 standards, designed to protect up to 4 operators simultaneously.

Thanks to its features, Genesi Allukemi Plus is also suitable for use during rescue phases, thus facilitating rescue operations.



Features


- Certification for 4 operators
- Custom support design
- Ergonomics
- Lightness
- Simplicity and speed of installation
- Noble materials
- Non-deformable absorber.



Compliance

- EN 795:2012 Type C
- CEN/TS 16415:2013 Type C
- UNI 11578:2015

Allukemi Plus lifeline

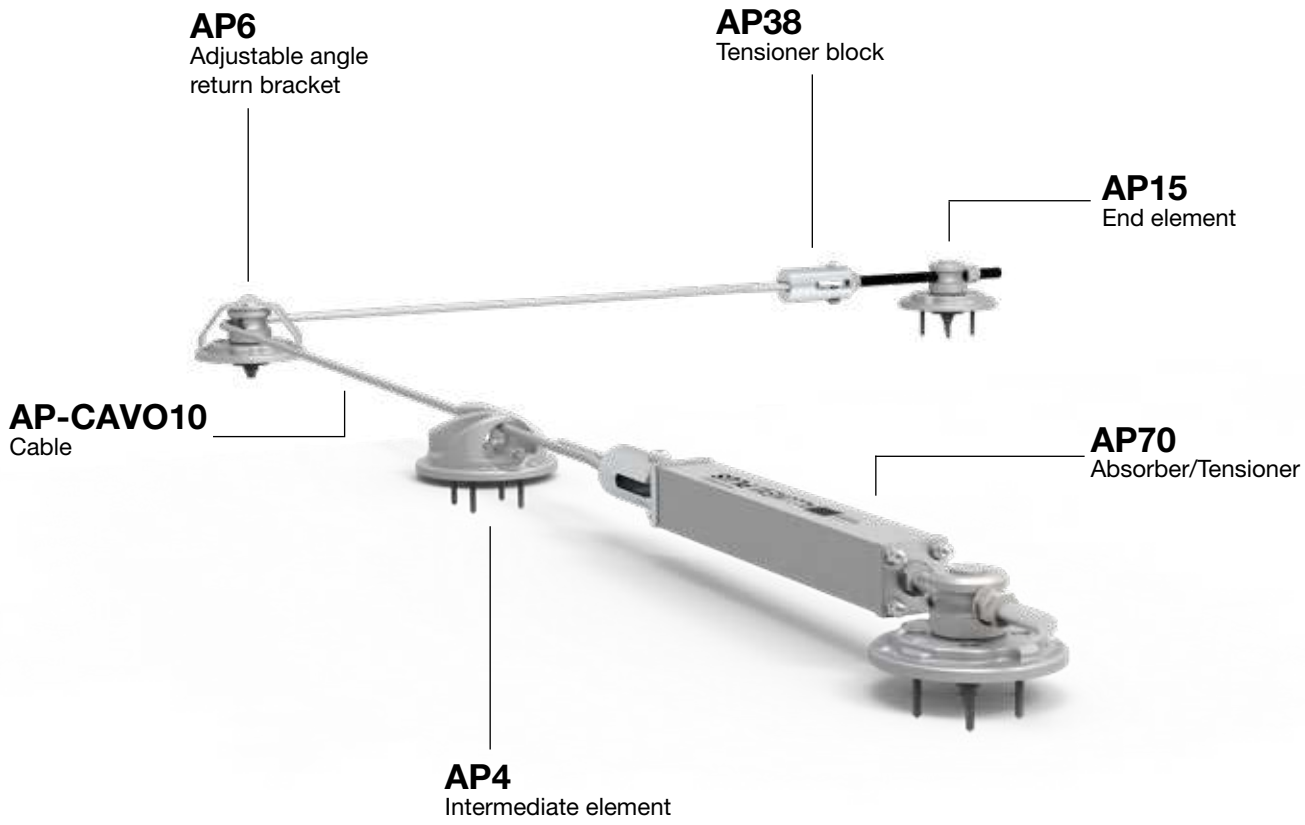



Cod. 312-0700-0001

AP70

Energy absorber/block for reducing kinetic energy in the event of a fall, mitigating the impact. It also functions as a tensioner for the correct tensioning of the cable.



Cod. 312-0600-0013

AP6

Swivel corner return bracket that prevents accidental cable exit at direction changes. The bracket is positioned in the rotating body of the AP15 element using a specially turned stainless steel screw.
Material: stainless steel



Cod. 312-0600-0005

AP15

End element that allows the creation of the starting and ending point of the lifeline. It is fixed on standard end supports, on custom-designed special supports, and on PA and PAM plates for wall applications.
Material: aluminium alloy



Cod. 312-0600-0010

AP4

Intermediate element installable in straight sections at intervals not exceeding 15 m, allowing the connector to pass through a sinusoidal movement. It can be fixed on standard intermediate supports, both on special ones and on PIA and PAM plates.
Material: aluminium alloy



Cod. 611-1002-0000

AP-CAVO10

Cable that allows the operator to move safely along its entire path. A blue strand and a Genesi-marked band identify the original cables.
Material: stainless steel



Cod. 312-0700-0002

AP38

Tensioner for cable locking and tensioning. Cable clamps and wedge are also provided for correct installation.
Material: tensioner body in stainless steel, cable locking system extrusion in aluminium alloy, and wedge in stainless steel.

Allukemi Plus lifeline

Cod. 314-1005-0001

PA-53



Plate for end and corner return elements used as support in wall or flat installations.
Material: aluminium alloy

Cod. 314-1005-0009

PIA-53



Plate for intermediate elements used as support in wall or flat installations.
Material: aluminium alloy

Cod. 314-1005-0006

PAM



Universal wall plate for all lifeline elements and used in the presence of internal angles in installation walls.
Material: aluminium alloy

Cod. 314-1005-0005

PAE



Bracket support for all lifeline elements and used in the presence of external angles in installation walls.
Material: aluminium allo

Cod. 314-1005-0004

PAD



Double plate used as support for two elements and is particularly useful in the case of crossing two distinct lifelines.
Material: aluminium alloy

Cod. 312-0600-0004


AP11



Flashing to protect all supports with a pole section of 80 x 80 mm from water. It comes with a 5 mm thick adhesive foam, which, placed between the pole surface and the two flanges, prevents possible water infiltration.
Dimensions: 151 x 151 x 30 mm (maximum footprint)

Cod. 314-5005-0007

BAX1410



Reinforced flat base support used as support for all line components, consisting of an aluminium pole and a cup base with a truncated pyramidal lateral surface.
Material: stainless steel base; aluminium alloy extension

Cod. 612-1001-0031

CP-AP



counter plate designed for the application of AP100, AP50, and AP50C supports.
Material: cataphoretic steel



Allukemi Plus lifeline
Supports

1 **BAX1410 or special single-fold supports**

Flat base support

2 **PAD**

Double plate

3 **PAE**


External angle plate

4 **PA**


Plate for wall or floor end elements

5 **PIA**

Plate for intermediate wall or floor elements

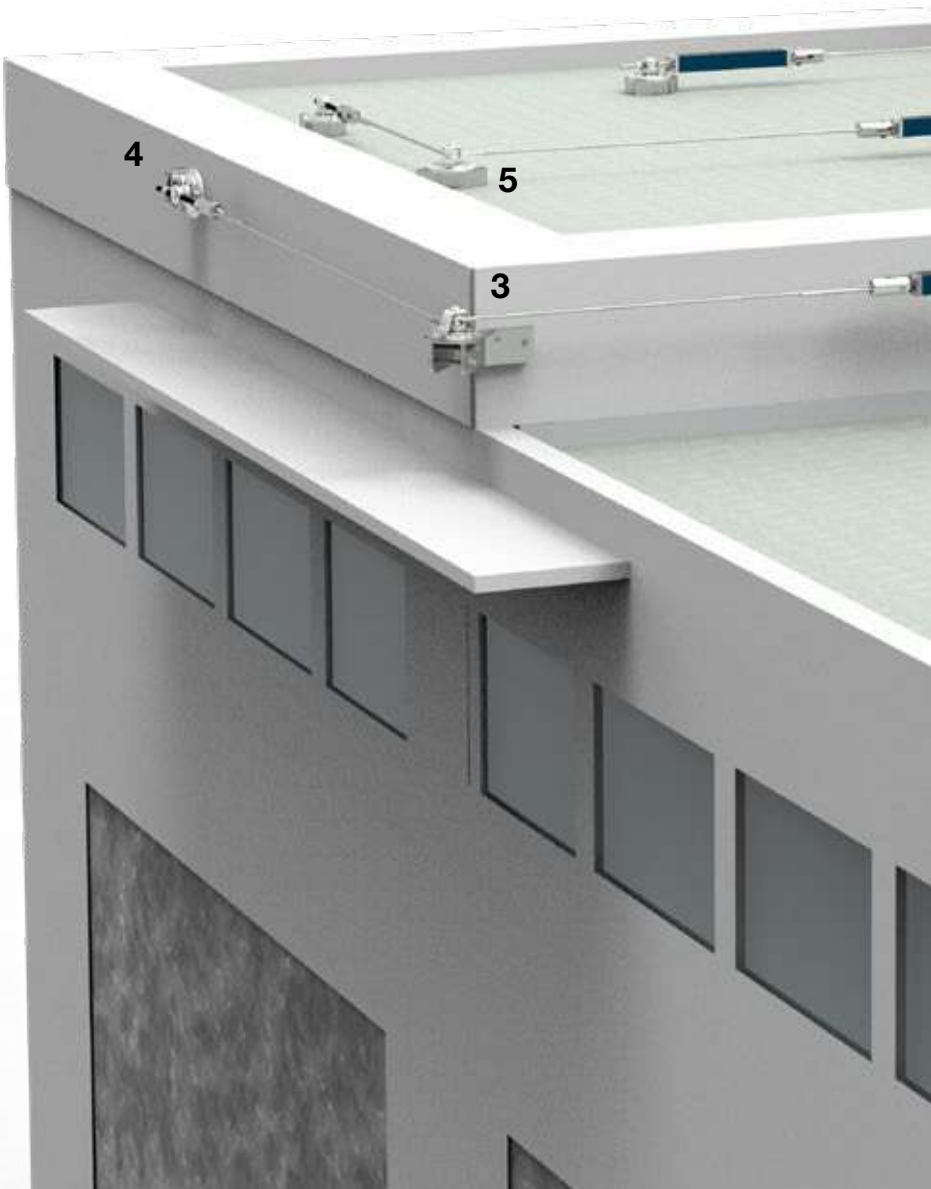


Lifelines can be used on surfaces with an inclination up to 15°. Blue anodized absorber available upon request.

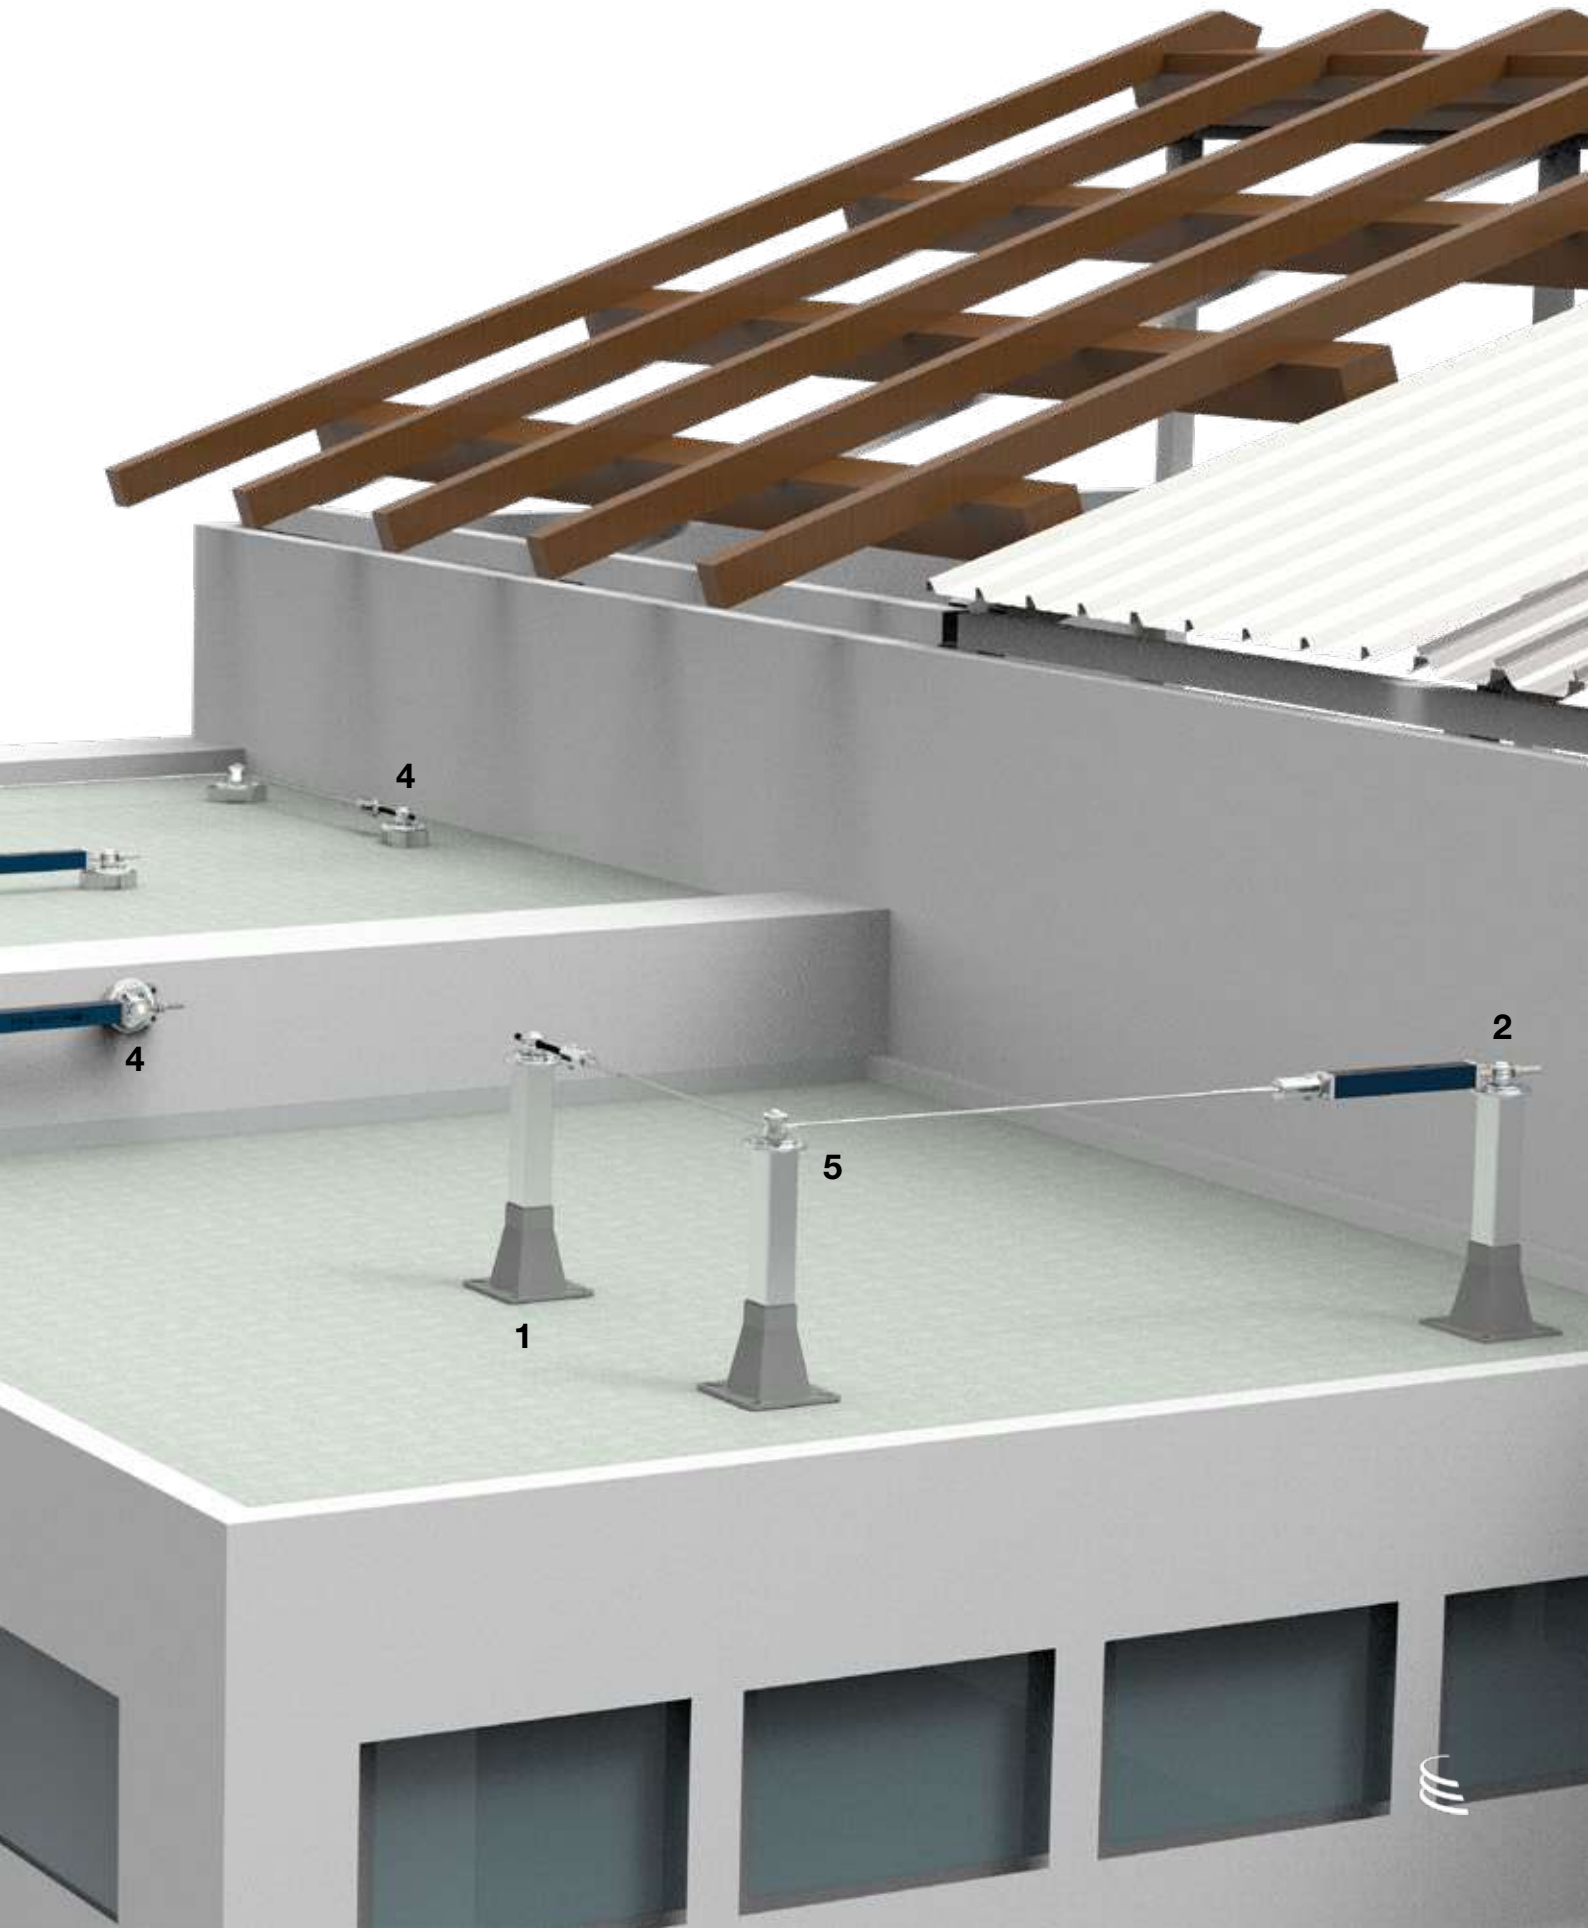



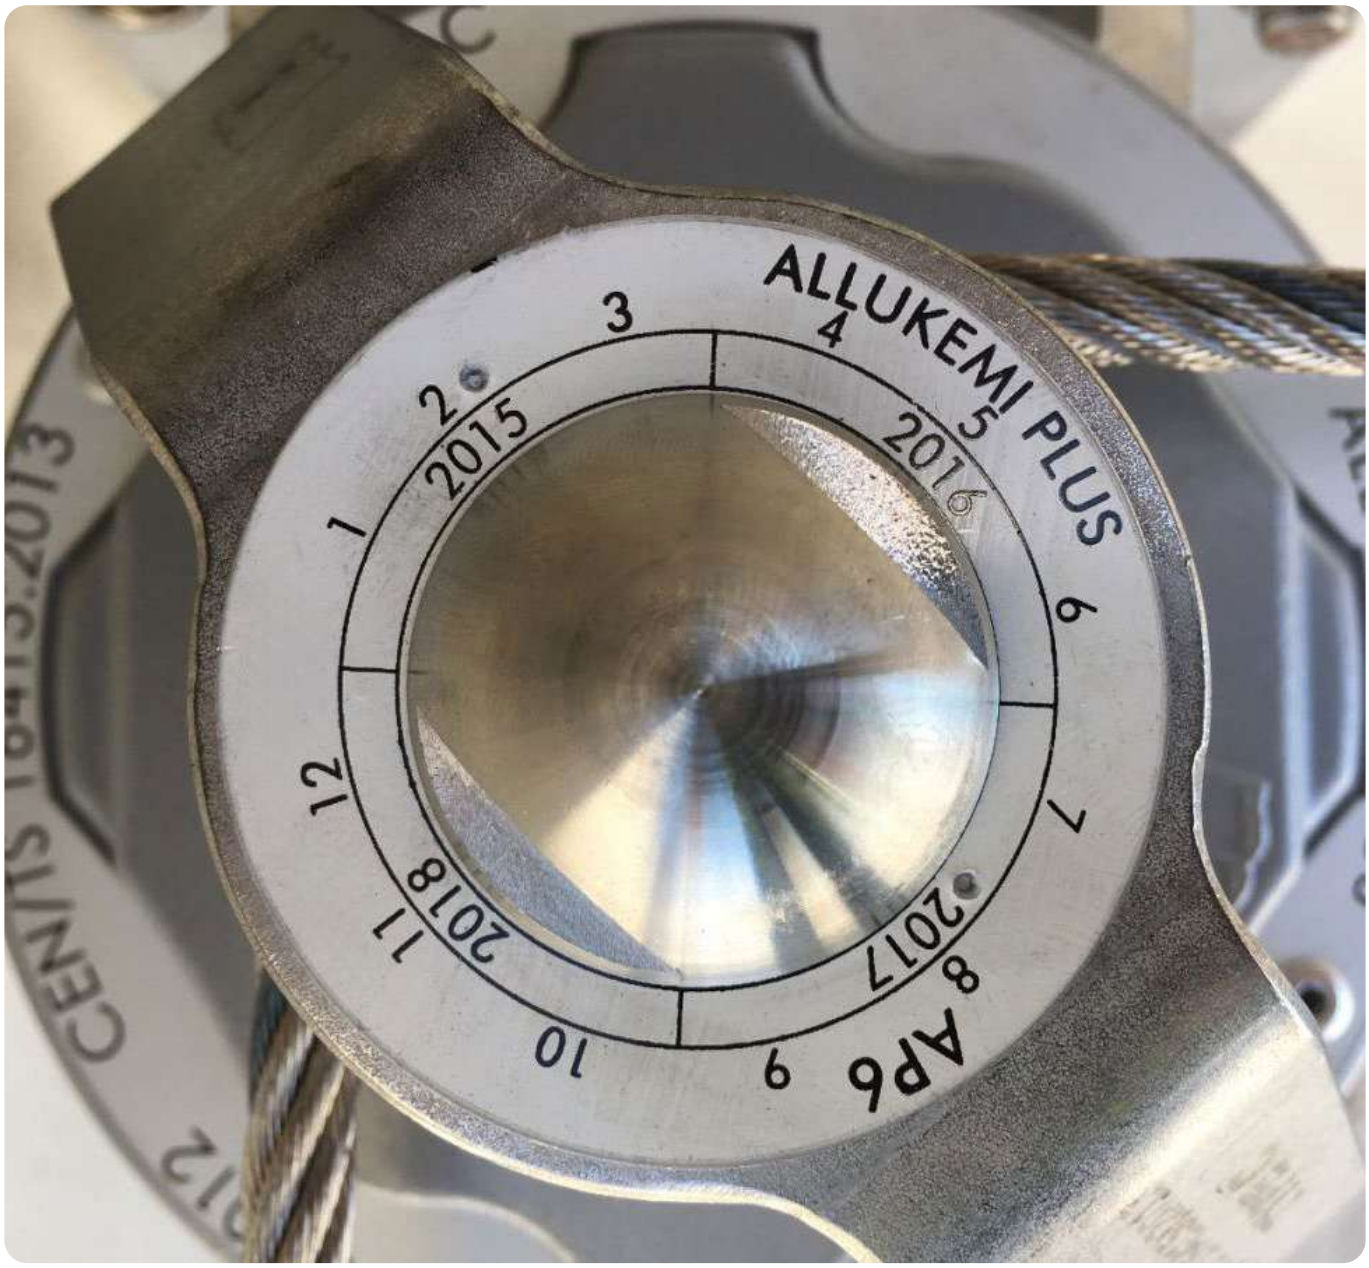


ALLUKEMI PLUS
1
2
3
4
5
6
7
8
9
10
11
12
2015
2016
2017
2018
APR

Lifelines
Special supports

Cod. 314-1005-0001
PA-53



Plate for end and corner return elements used as support for wall or flat installations.
Material: aluminium alloy

Cod. 314-1005-0009
PIA-53



Plate for intermediate elements used as support in wall or flat installations.
Material: aluminium alloy

Cod. 314-1005-0006
PAM



Universal wall plate for all elements of the lifeline and used in the presence of internal corners in the installation walls.
Material: aluminium alloy

Cod. 314-1005-0005
PAE



Bracket support for all elements of the lifeline and used in the presence of external corners in the installation walls.
Material: aluminium alloy

Cod. 314-1005-0004
PAD



Double plate used as support for two elements and is particularly useful in the case of crossing between two distinct lifelines.
Material: aluminium alloy

Cod. 312-0600-0004
AP11




Flashing to protect all supports with a pole section of 80 x 80 mm from water. An adhesive foam with a thickness of 5 mm is provided, which, placed between the surface of the pole and the two flanges, prevents possible water infiltration.
Dimensions: 151 x 151 x 30 mm (maximum footprint)

Alux Rail and AluxCrab systems



Genesi's type D anchoring devices are designed to ensure complete protection for operators exposed to the risk of falling.

Genesi rails are made of anodized aluminium, a lightweight and durable material, allowing smooth and safe movement from one point to another along a straight or curved path without the need for special operations. Genesi offers two types of rails and various brackets to provide the best security depending on the application, the required operation, and the type of structure on which the system is to be installed.

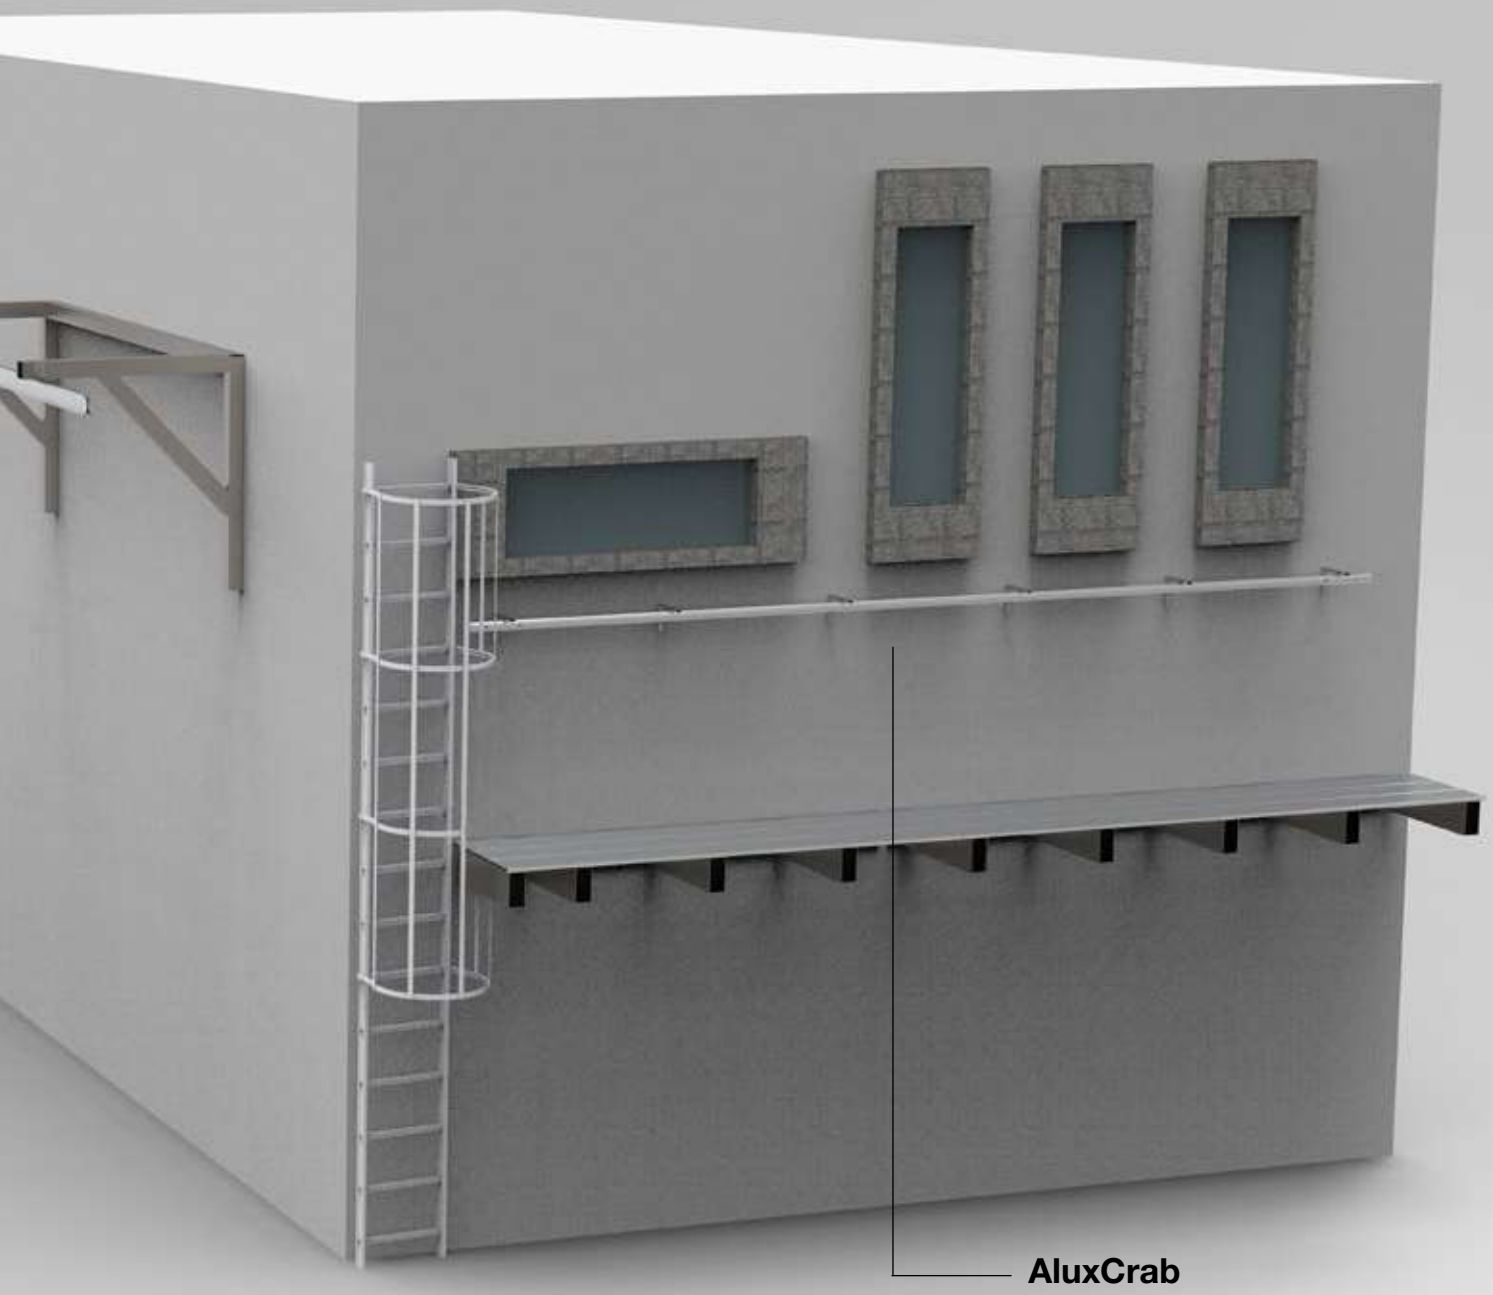



Alux Rail

The Genesi Alux Rail is an anchoring device compliant with EN 795:2012 Type D, CEN/TS 16415:2013, and UNI 11578:2015 standards, and it allows protection for up to 4 operators.

Genesi Alux Rail can be fixed to the structure with ceiling or wall supports; in case of fall arrest use, it is possible to secure up to 10 meters with only two supports, thanks to the fact that Alux Rail allows a maximum distance between fixings of 8 meters and a cantilever of 1 meter on the terminal supports. In case of suspended work, the maximum distance between fixings is reduced to 3 meters.

Genesi has designed three mobile anchoring points (trolleys) to be defined based on usage needs: for fall arrest, for use in suspended work, and for applications in potentially explosive environments. Alux Rail is available in the ATEX version for installations in potentially explosive environments in compliance with Directive 2014/34/EU and standards EN 80079-36:2016 and EN 80079-37:2016 class II cat. 2.



Features


- Indeformable system
- 4 operators
- Use in suspended work
- ATEX certified
- Reduced management costs
- High product durability
- Fixings every 8 meters



Compliance

- EN 795:2012 Tipo D
- CEN/TS 16415:2013 Tipo D
- UNI 11578:2015
- ATEX: EN ISO 80079-36:2016; EN ISO 80079-37:2016

Alux Rail system

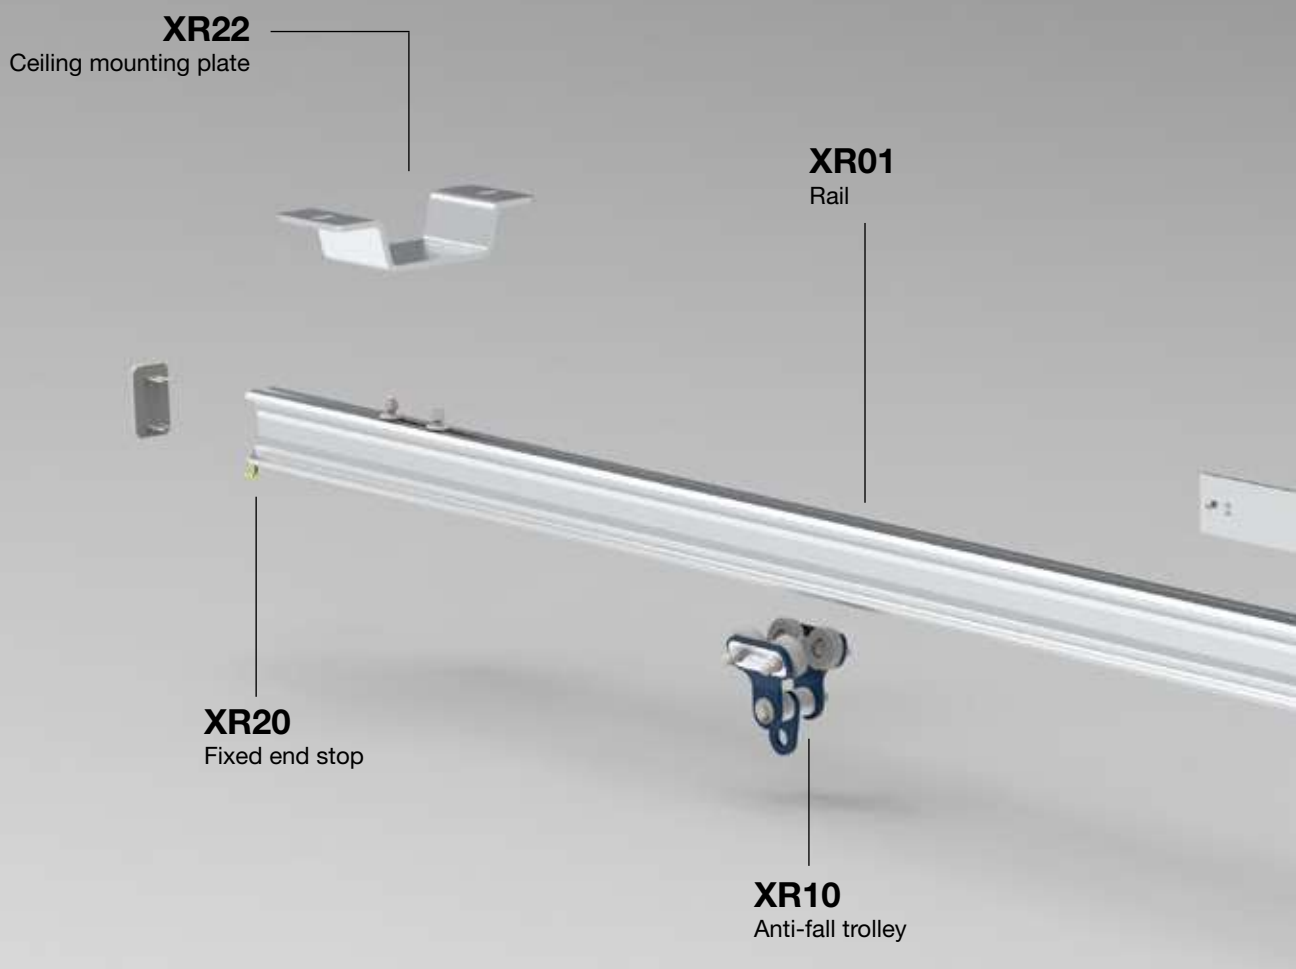


XR03
135° Curve
XR21
Joint
XR02
90° Curve
XR20
Fixed end stop

Alux Rail system
Components

Cod. 322-0100-0001
XR01



Rail with a special profile that constitutes the main element of the system and must be fixed to the main structure.
Material: aluminium extrusion
Length: bars up to max 8 m

Cod. 322-0100-0002
XR02



90° curve designed to adapt the rail geometry to that of the building. It consists of a straight section 500 mm long on each side of the curve, used to insert the joint element into the system, and a curved section with a minimum radius of 600 mm.
Material: aluminium extrusion
Angle: 90° | Radius: 600 mm

Cod. 322-0100-0003
XR03



135° curve designed to adapt the geometry of the rail to that of the building. It consists of a straight section 500 mm long on each side of the curve, used to insert the joint element into the system, and a curved section with a minimum radius of 600 mm.
Material: aluminium extrusion
Angle: 135° | Radius: 600 mm

Cod. 323-0100-0001
XR10



Mobile anchoring device designed to move on the ceiling and slide along the rail thanks to Teflon wheels. It is essential for the use of the rail.
Material: stainless steel and aluminium shell with 4 high-sliding Teflon wheels

Cod. 323-0100-0003
XR10S



Mobile anchorage device for suspended work designed to be used in combination with XR10. It is equipped with a plate with two brakes to allow suspended work. The secondary rope must be connected to XR10.
Material: stainless steel and aluminium shell with 4 high-sliding Teflon wheels

Cod. 323-0100-0002
XR10A



Mobile anchorage device for ATEX environments, runs along the rail with Teflon and brass wheels.
Material: shell in stainless steel AISI 304L and aluminium with 2 high-sliding Teflon wheels and 2 brass wheels

Cod. 322-0100-0013

XR21



Joint designed to connect two sections of rail, featuring an EPDM insert that ensures continuity and facilitates locking and positioning on the rail. The grooves present in the rail profile further facilitate the correct positioning of the screws.
Material: stainless steel and EPDM

Cod. 322-0100-0012

XR20



Fixed stop for trolley used to prevent accidental exit of the mobile anchoring device. The use of the two blocks prevents the removal of the trolley.
Material: aluminium and rubber

Cod. 324-0100-0018

XR14-K



Bracket support for facade to sustain all system loads.
Material: stainless steel

Cod. 324-0100-0022

XR22



Plate for securing the system to the ceiling.
Material: stainless steel

Cod. 322-0100-0014

XR40



Cover for the protection of retractable systems installed outdoors, contributes to the system's efficiency over time.
Material: aluminium

Cod. 322-0100-0015

XR30



Fixings.




DEMAG
O.T.I.





AluxCrab

The Genesi AluxCrab rail is an anchoring device compliant with EN 795:2012 Type D, CEN/TS 16415:2013 Type D, and UNI 11578:2015 standards, allowing protection for up to 3 operators.

Made from a special anodized aluminium alloy, its profile is specifically designed to ensure lightness, great versatility in design, ease of installation, and low visual impact. AluxCrab can be installed on the ceiling, wall, or floor with a maximum distance between fixings of 3 meters, and the joint can be made at any point of the span between two fixings. A series of curves, fixings, and special supports are available, which can also be custom-designed to ensure the rail is a completely integrated and integrable safe anchorage in the structure to be secured.

AluxCrab is used with the dedicated mobile anchorage point, XC10A, made of stainless steel with excellent mechanical and chemical resistance characteristics. The XC10A trolley is developed to ensure excellent sliding in all three types of installation thanks to special rolling bearings, it complies with the PPE Regulation 2016/425 and is CE marked.

AluxCrab is made of materials that prevent the accumulation of electrostatic charges and the generation of sparks and is configurable in the version for suspended work with fixings positioned at a maximum of every 1.5 meters. In the application for suspended work, two trolleys must be used, one of which is equipped with a special brake to block movement on the rail (XC10A-F).



Features


- Up to 3 operators
- Maximum distance between fixings: 3 m
- Low deflection
- Anodized aluminium
- Absorbs potential expansion/contraction
- Wide range of supports and possibility to design ad hoc
- Possibility of direct installation on structure
- Possibility to reach a distance of 5 meters between fixings only with special plate and only in overhead configuration




Compliance

- The AluxCrab rail complies with the standards EN 795:2012 Type D, CEN/TS 16415:2013 Type D, and UNI 11578:2015.
- The XC10A trolley complies with the PPE Regulation 2016/425 and is CE marked.

AluxCrab system

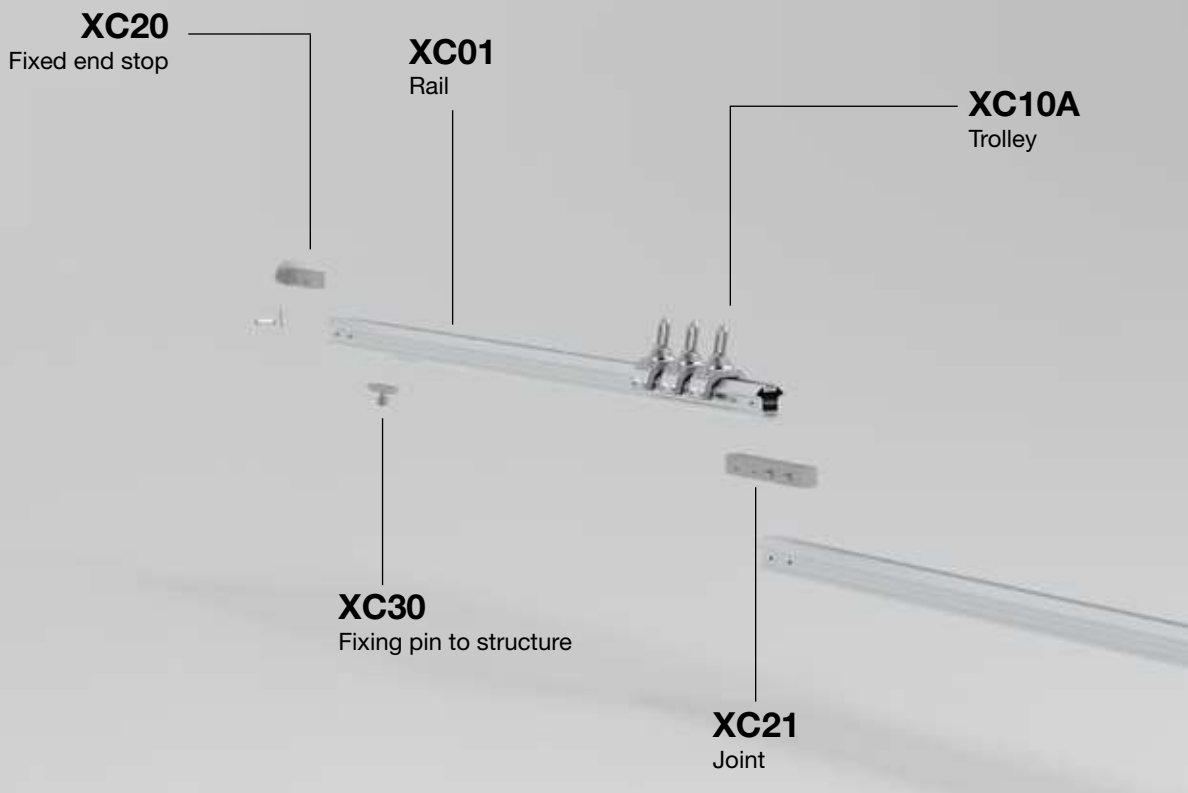

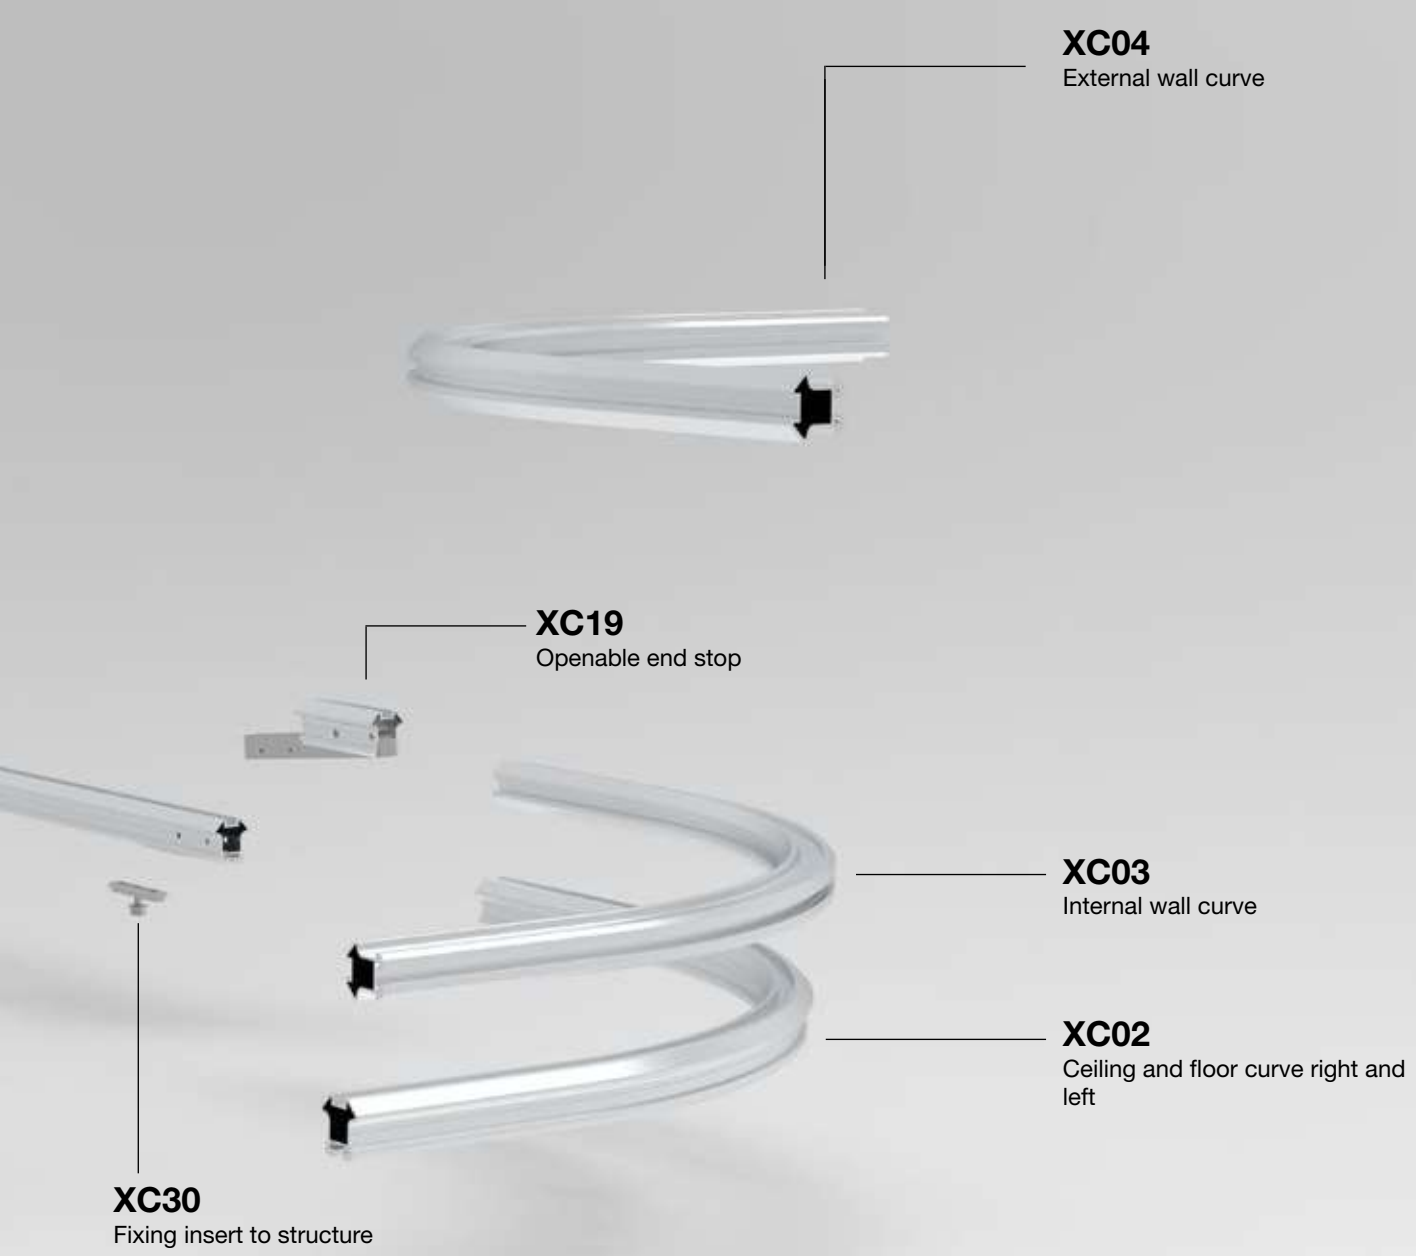
XC04
External wall curve
XC19
Openable end stop
XC03
Internal wall curve
XC02
Ceiling and floor curve right and left
XC30
Fixing insert to structure

AluxCrab system
Components



Cod. 322-0832-0300
Cod. 322-0832-0600
XC01

Rail designed to ensure the protection of up to three operators with a system of compact dimensions and low visual impact, installable on the ceiling, wall, or floor.
Material: aluminium
Length: bars up to max 3 m



Cod. 322-0832-0002
XC02

Component that allows a 90° curve on ceiling and floor, to the right and left.
Material: aluminium
Angle: 90°



Cod. 322-0832-0003
XC03

Component that allows for a 90° internal curve in wall installations.
Material: aluminium
Angle: 90°



Cod. 322-0832-0004
XC04

Component that allows for a 90° external curve in wall installations.
Material: aluminium
Angle: 90°



Cod. 323-0832-0001
XC10A

Mobile anchorage device designed to be used individually in the fall arrest configuration or in pairs (two XC10A) for suspended work.
Material: stainless steel with 4 high-sliding wheels



Cod. 323-0832-0002
XC10A-F

Brake kit XC10A-F for AluxCrab XC10 trolley.

Cod. 322-0832-0006

XC20



Fixed end stop used to prevent the accidental exit of the mobile device, and the use of the two blocks prevents its removal from the rail.
Material: aluminium, stainless steel, and EPDM

Cod. 322-0832-0007

XC21



Allows the connection of two sections of profile XC01, V-XC01, or LadderCrab-I ensuring continuity. It is equipped with an EPDM gasket that accommodates the thermal expansions of the profile and facilitates positioning in the joint rail.

Cod. 322-0832-0009

XC31



Clamp with double fixing XC31 for wall and floor installations and for making the terminal fixings of the rail. The free rail section (cantilever) must never exceed 20 cm from the terminal fixings.
Material: stainless steel

Cod. 322-0832-0010

XC32



Intermediate clamp used as an intermediary in wall and floor installations and can also be used as a terminal in ceiling installations.
Material: stainless steel

Cod. 322-0832-0008

XC30



Direct fixing insert for carpentry designed to be used in ceiling, floor, or wall installations.
Material: stainless steel

Cod. 322-0832-0005

XC19



Openable end stop for AluxCrab, AluxCrab V, and LadderCrab-I. The component prevents the unintentional release of the mobile anchorage device (XC10A) or the guided type fall arrest device (V-XC10) while allowing its insertion into the anchorage system. The device is designed so that the removal of the mobile device requires three sequential voluntary actions.









AluxCrab V

AluxCrab V is a guided type fall arrest device that includes a rigid anchor line designed to ensure maximum safety during vertical movement for up to 3 operators simultaneously.

Consisting of a guided type fall arrest device (GTFA) V-XC10 and an aluminium rail with integrated rack, it represents an advanced and highly reliable solution for protecting workers at risk of falling.

AluxCrab V can be installed on vertical ladders, walls or fixed structures and allows ascent and descent without the need for manual adjustments, offering constant protection to the user.

In the event of an accidental fall, the GTFA automatically stops due to friction on the rigid guide and mechanically on the rack integrated into the rail.

The system can be equipped with an integrated anchor point, installed directly on the rail, which can help rescuers to carry out a rapid and effective intervention in case of emergency or need for rescue.



Features


- Can be installed on any type of structure
- Protection for up to 3 operators, each one equipped with their own GTFA
- Double locking system consisting of a guided type fall arrest device (GTFA) and integrated rack
- Anodised aluminium
- Maximum system length: 100m
- Fall indicator integrated into the rack structure



Compliance

- PPE Regulation 2016/425
- EN 353-1:2014+A1:2017
- PPE-R/11.119 - Version 1

AluxCrab V
Components

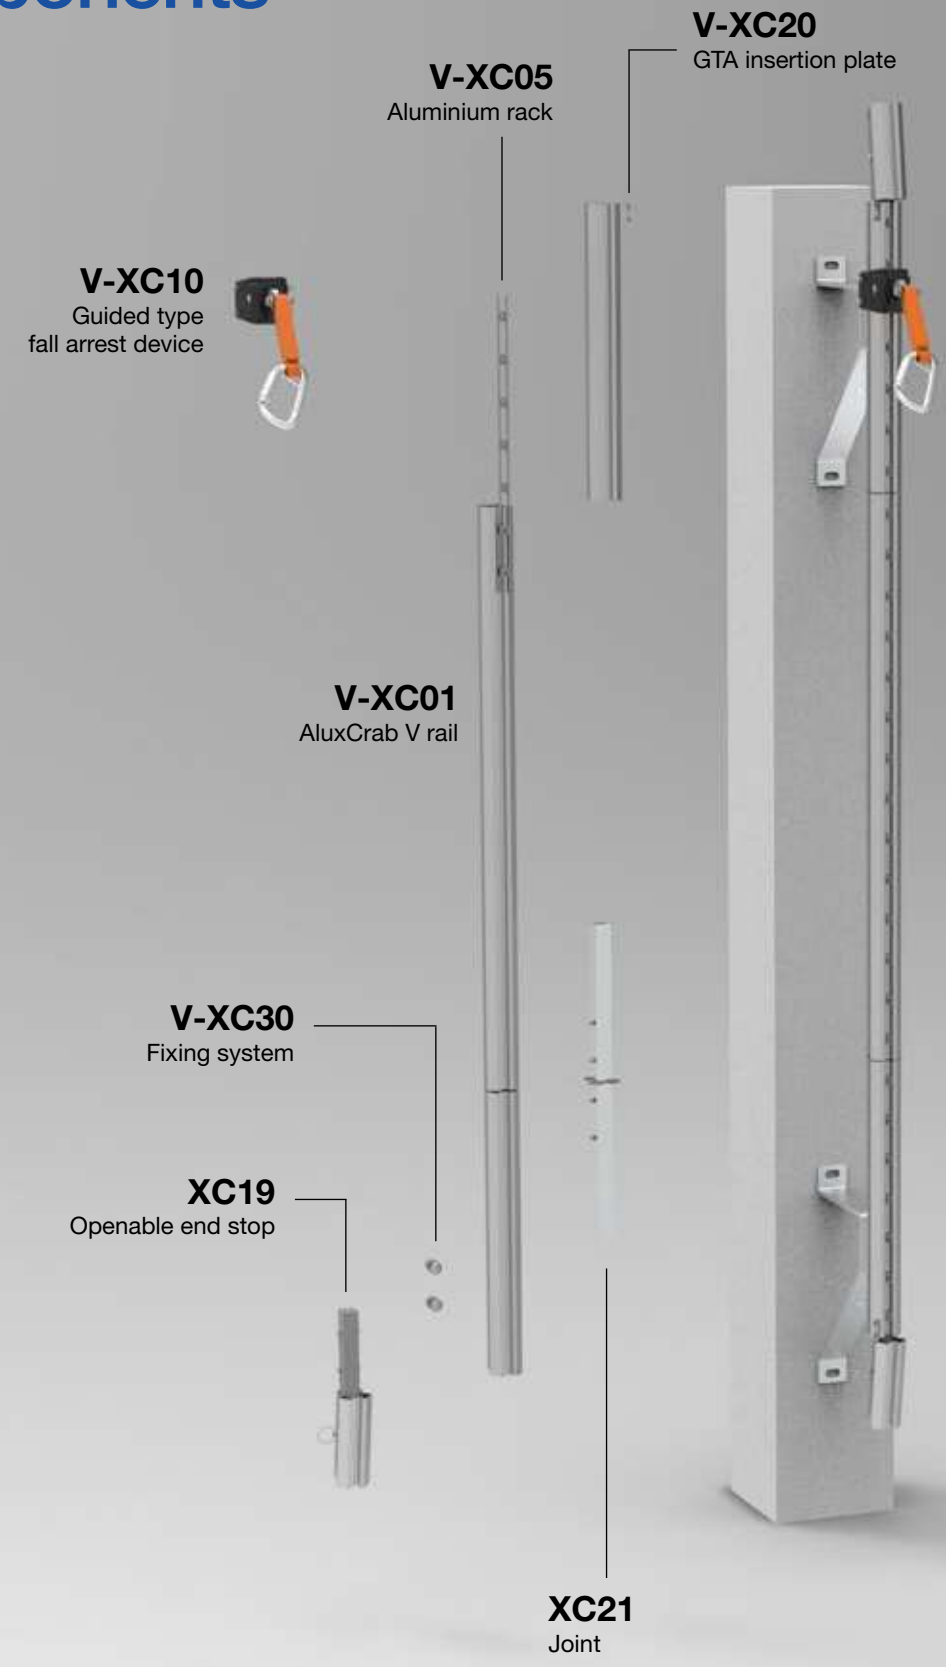

Cod. 324-0832-0001
V-XC34



Mounting bracket.
L= 200mm

Cod. 324-0832-0002
V-XC35



Mounting bracket.
L=360/460mm

Cod. 324-0832-0009
V-XC39



Kit for mounting the AluxCrab V system on an existing ladder.

Cod. 322-0832-0003
V-XC01



AluxCrab V rail supplied in bars of 2990mm and 1500mm. V-XC01 consists of the XC01 profile in which the V-XC05 rack is integrated and allows the safe stopping of the GTFA trolley.

Cod. 322-0832-0002
V-XC05




Aluminium rack bonded to the XC01 profile using 3 TPSEI 4.8x16 screws. Generally, the rack is supplied already assembled to the XC01 profile, thus constituting the sales item called V-XC01.
Length 455mm and 260mm

Cod. 323-0832-0003
V-XC10



Guided type fall arrest device with energy absorber. Made of aluminium and equipped with 4 sliding wheels. Automatic stopping is ensured by friction on the outer surface of the rigid guide and by the engagement of the locking system on the rack.

Cod. 322-0832-0015
V-XC20



GTFA insertion plate fixed at the ends of the rigid anchorage line. Prevents incorrect orientation of the guided type fall arrest device during insertion phases.

Cod. 322-0832-0005
XC19



Openable end stop for AluxCrab, AluxCrab V, and LadderCrab-I. The component prevents the unintentional exit of the mobile anchorage device (XC10A) or the guided type fall arrest device (V-XC10) and, at the same time, allows its insertion into the anchorage system. The device is designed so that the removal of the mobile device occurs through three sequential voluntary actions.

Cod. 322-0832-0007
XC21



Allows joining two sections of XC01, V-XC01, or LadderCrab-I profile ensuring continuity. It is equipped with an EPDM gasket that accommodates the thermal expansions of the profile and facilitates positioning in the rail of the junction.

Installation equipment

Cod. 623-1000-0003
GE-1450814



Battery-powered electromechanical riveter capable of working with rivets from 4.8 mm to 6.4 mm in diameter in all materials.
Complete with 2 batteries
Weight: 2 kg with battery
Power: 20,000 N

Cod. 623-1000-0045
Q-TOOLR64XL



Battery-powered rivet gun capable of installing rivets with a diameter from 2.4 mm to 6.4 mm, including structural rivets.
Weight: 1.89 kg
Power: 20,000 N

Cod. 623-1000-0007
RIVETER



Manual riveter designed for professional use both indoors and outdoors. It is the ideal tool for applications requiring the use of large rivets with greater resistance.
Weight: 1.42 kg

Cod. 623-1000-0005
RANA



Cable clamp used in conjunction with the lever hoist to easily tension the lifeline cable.

Cod. 623-1000-0008
TIRA-RANA-KITO



Lever hoist used in combination with the cable clamp to easily tension the lifeline cable.

Cod. 626-4000-0001
C35



Piombino identifier equipped with NFC technology and characterized by a serial number shown on all documents accompanying the system and on the identification sign.

Cod. 623-1000-0047

Genesi G25



The Genesi G25 Digital Traction Tester is ideal for precisely testing fixings for lifelines, safety eyebolts, scaffold anchors, and construction fixings up to 25 kN.

Cod. 623-1000-0048

Kit test di trazione



Test Kit Supplied in a convenient shoulder bag, it allows for indirect testing of fixings through tests conducted on the respective poles or supports. This accessory must be used with the same sensor as the Genesi G25 kit.

Cod. 626-1000-0001

CA00 (sistemi)


GENESI

CARTELLO IDENTIFICATIVO

Dispositivi
EN 795
CEN/TS 16415
UNI 11578
A
C
D

Parapetto
Passerella
Sistema verticale
Scala con gabbia
EN 14122-3
EN 14122-2
EN 353-1
NTC 2018
EN 13374

ID sistema
N. massimo di lavoratori collegati
Piombo n.
Piombo n.

Data entrata in servizio

Produttori
Genesi S.r.l.

Tag

Installatore

Ispezioni

Non utilizzare i dispositivi di TIPO A , C e D se la data delle ispezioni è superiore all'annuale

Sign to be posted near the system access, displaying the following information: model, lead number, manufacturer, installer, distributor, date of commissioning.





GENESI
KNOWING TO PROTECT

Address

Via Donizetti, 109/111
24030 Brembate di Sopra
Bergamo (Italy)

Contacts

Tel. +39 035 620 380
Email: info@genesiprotection.com
www.genesiprotection.com

Social

Visit our website

FP Catalogue Rev. 10-25 | Disclaimer: the information provided in this catalogue is subject to change without notice by Genesi®.