SNAPSHOOT
ENGINEERED FOR A SAFER TOMORROW

현장을 이해하고, 필요한 솔루션을 연결합니다.

산업안전 · 추락방지 시스템
산업용 소재 · 건축자재
제품 제안부터 공급·시공·설치·교육까지



COMPANY INFORMATION

스냅슛 (SNAPSHOOT)

ADDRESS (15431) 경기도 안산시 단원구 풍전로 37-9 트리플렉스 301동 118호
TEL 0507-1374-9229
FAX 0504-481-6749
E-MAIL bkkim@snapshoot.co.kr

TECHNICAL DOCUMENTS

인증서 · 데이터시트 · 기술자료

제품의 규격과 성능, 인증 및 적용 조건을 확인하기 위한 자료입니다.

ABOUT SNAPSHOOT

제품 공급을 넘어, 현장에 맞는 해결책으로

스냅슛은 산업현장의 작업 환경과 요구 조건을 바탕으로
적합한 제품과 시스템을 제안합니다. 현장 실사를 통해 설치 조건을 확인하고,
공급부터 시공·설치 및 사용 교육까지 필요한 과정을 함께합니다.

추락방지 시스템

안전대부착설비 · 수평·수직 라이프라인
레일 시스템 · 리지드 포스트

밀폐공간 진입·구조 솔루션

데빗암 · 삼각대 · 구조용 윈치
윈치 안전블록 · 구조장비

산업안전 보호구

전신형 안전대 · 랜야드 · 안전블록
작업 환경에 맞춘 개인보호구

산업용 소재·건축자재

산업용 테이프 · 접착제 · 기능성 소재
구조용 스크류 · 목조건축 자재

SNAPSHOOT
ENGINEERED FOR A SAFER TOMORROW

홈페이지 바로가기 →
문서 라이브러리 바로가기 →
시공사례 바로가기 →
문의하기 →

본 페이지는 스냅슛의 자료 제공 안내용 표지입니다. 첨부된 인증서 및 기술자료의 발행 주체, 인증 대상과 적용 범위는 해당 원문을 기준으로 확인해 주세요.

KSTRONG UNRIVALED SAFETY.


MICRON™ SERIES

AFS550028 & AFS550028D

KStrong Micron SRL has been designed to use as a fall arrest block and energy absorbing lanyard. It can attach at foot level allowing it to be used both vertically and horizontally, ensuring the users safety whilst working close to an edge. It is robust, durable and the lightest in its range.

Features

- Light Weight
- 360 Degree Swivel top
- High Impact Load bearing polymer casing
- Length: 2m
- Inbuilt textile Energy Absorber for shock absorption
- Aluminium ANSI Scaffold Hook with 16kn Steel Gate & Lock
- Minimum Breaking Strength >15kN.
- Used Horizontally.
- Used at Foot level –
  o Rated to Fall Factor 2
- Twin Pawl Braking mechanism
- Ease of connecting the user's lanyard to the HLL using a Karabiner.
- Sharp Edge Rated (R>0.5mm).
- Easily attached to all harnesses by using connector AFC609100.
- ATEX 2014/34/EU Certified
- Temperature Range -30 to +50 deg.
- QR Code for ease of identification.

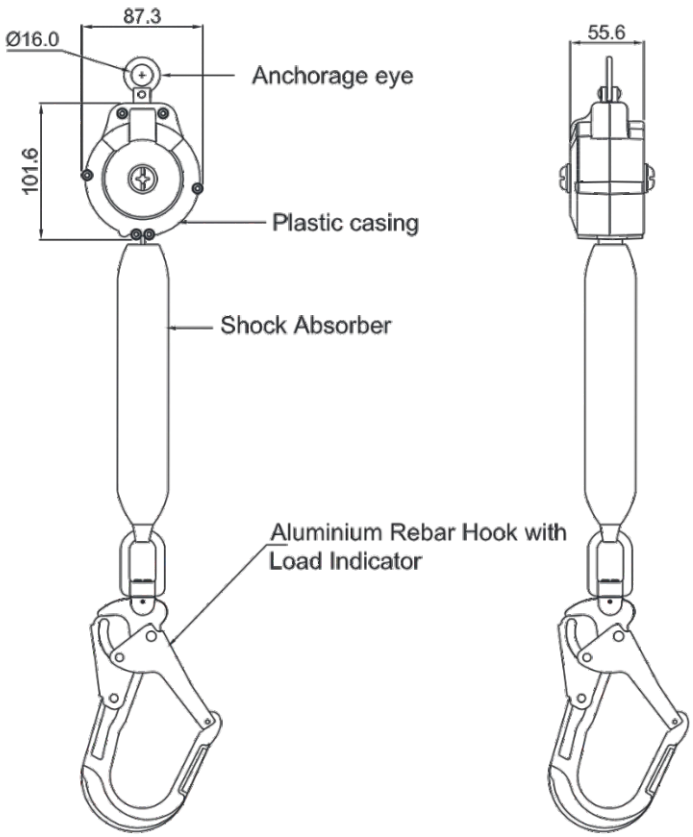

AFS550028



KSTRONG®
UNRIVALED SAFETY.

z

AFC609100



AFS550028D



Load Capacity

140Kg Vertical
100Kg Horizontally

Material

Webbing	:	Dyneema (UHMWPE) 21mm Wide MBS: 20kN
Casing	:	High Impact Polymer
Shock Absorber	:	Polyester Webbing
Metal Components	:	Aluminium Rebar Hook with Load Indicator
		Material : Aluminium Alloy Body Alloy Steel Gate 16kN (3600lbs)
		MBS : 23kN (5000lbs)
	:	Twin SRL Connector
		Material : Alloy Steel
		Separator : High Density Polyethylene
		MBS : 23kN (5000lbs)

Weight

Single Micron	:	1.34 kg ± 0.05 kg
Twin Micron	:	2.91 kg ± 0.05 kg

How To Use

Refer to User Instruction Manual

Relevant Standards

EN 360:2023, VG11 RFU # 11.060

CE 0598

