H-RAIL VERTICAL

RAIL SYSTEM FOR VERTICAL USE ON LADDER


EN 353-1:2014 + A1:2018 | RfU 11.119 | AS/NZS 1891.3.2020

FUNCTIONAL
The sliding device with integrated energy absorber allows continuous ascent and descent in safe and comfortable conditions.

DURABLE
The elements in AISI 304 stainless steel and aluminium alloy provide excellent resistance to corrosion.

PRACTICAL
It is a user-friendly system comprised of few elements that are easy to install.


MAXIMUM NUMBER OF USERS	
LOAD DIRECTION	
TYPES OF APPLICATION	

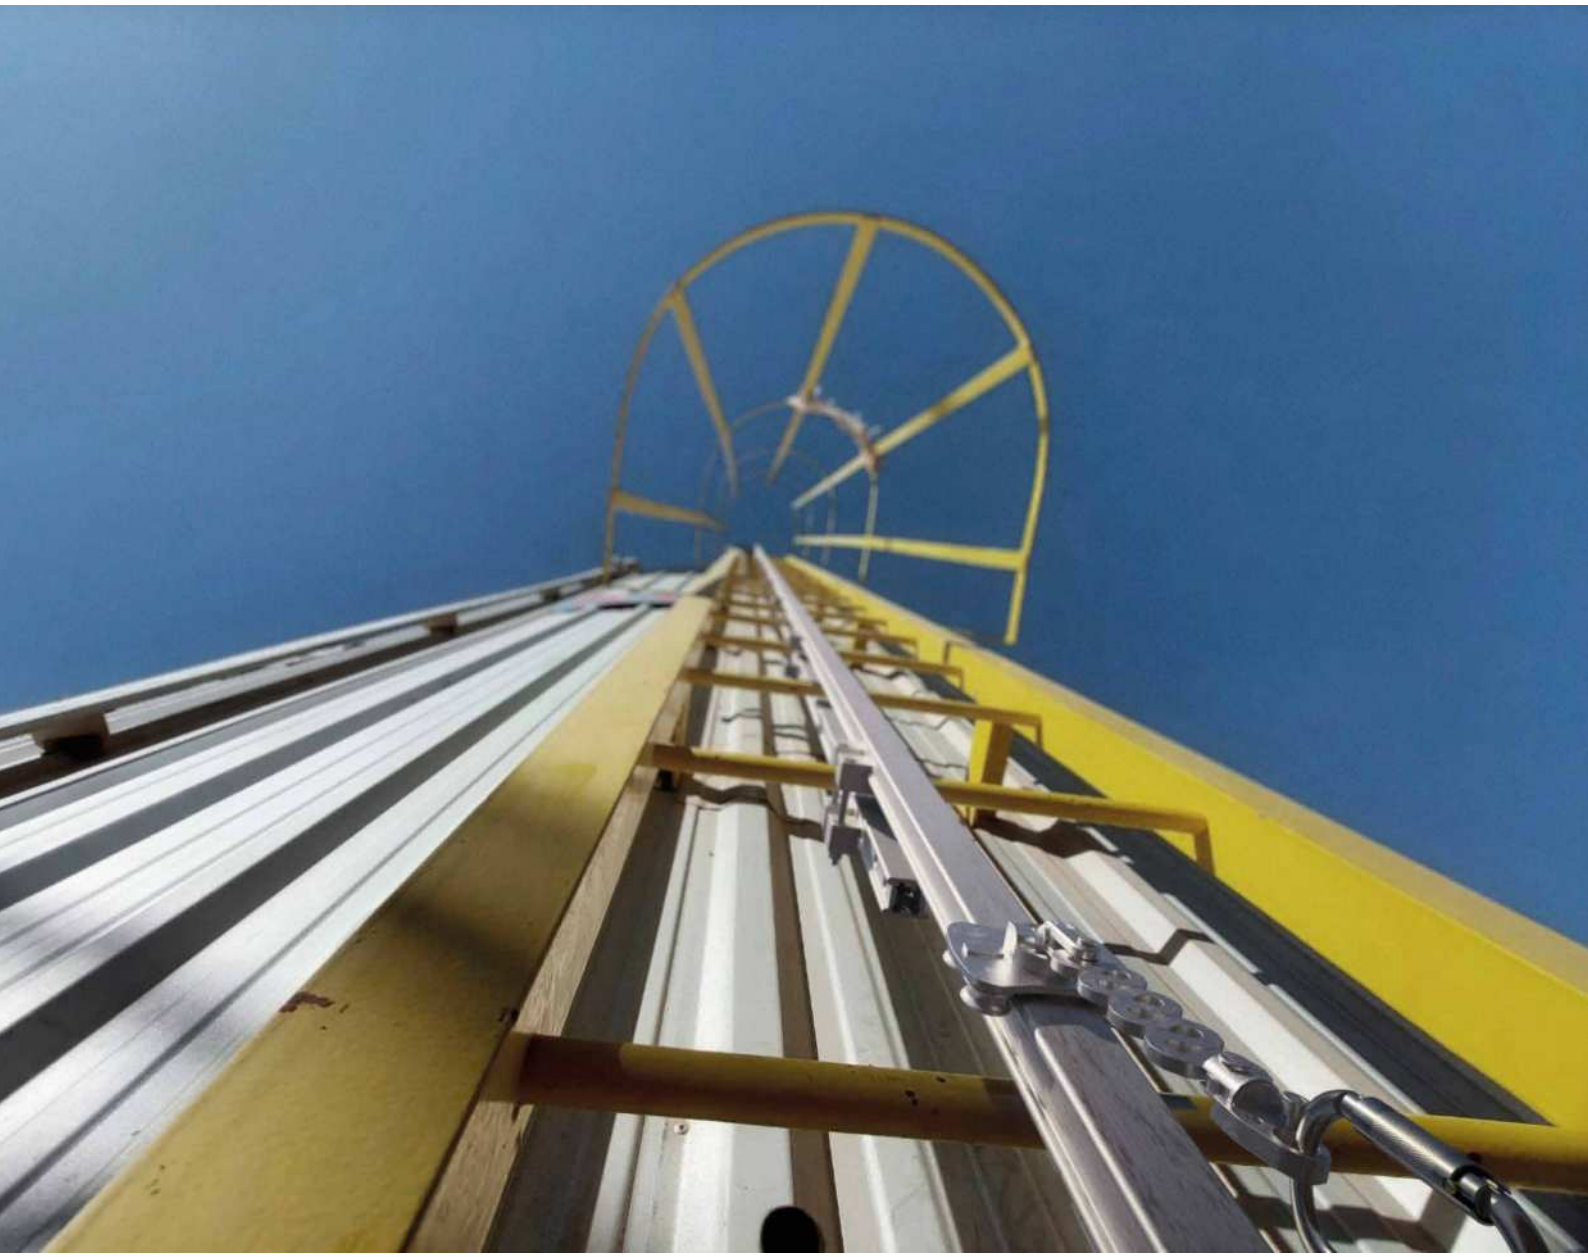


TECHNICAL DATA


fall protection			EN 353-1:2014 + A1:2017 / RfU 11.119	AS/NZS 1891.3.2020
maximum number of users		no.		
minimum distance between operators	z_{min}	[m]	3	3
minimum span	x_{min}	[m]	0,5	0,5
maximum span	x_{max}	[m]	3	3

installation range



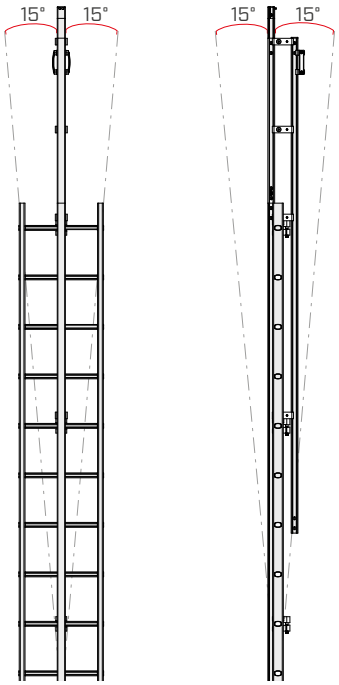


step shape



B from 20 to 100 mm
H from 10 to 60 mm
d max 60 mm

H-RAIL VERTICAL COMPONENTS

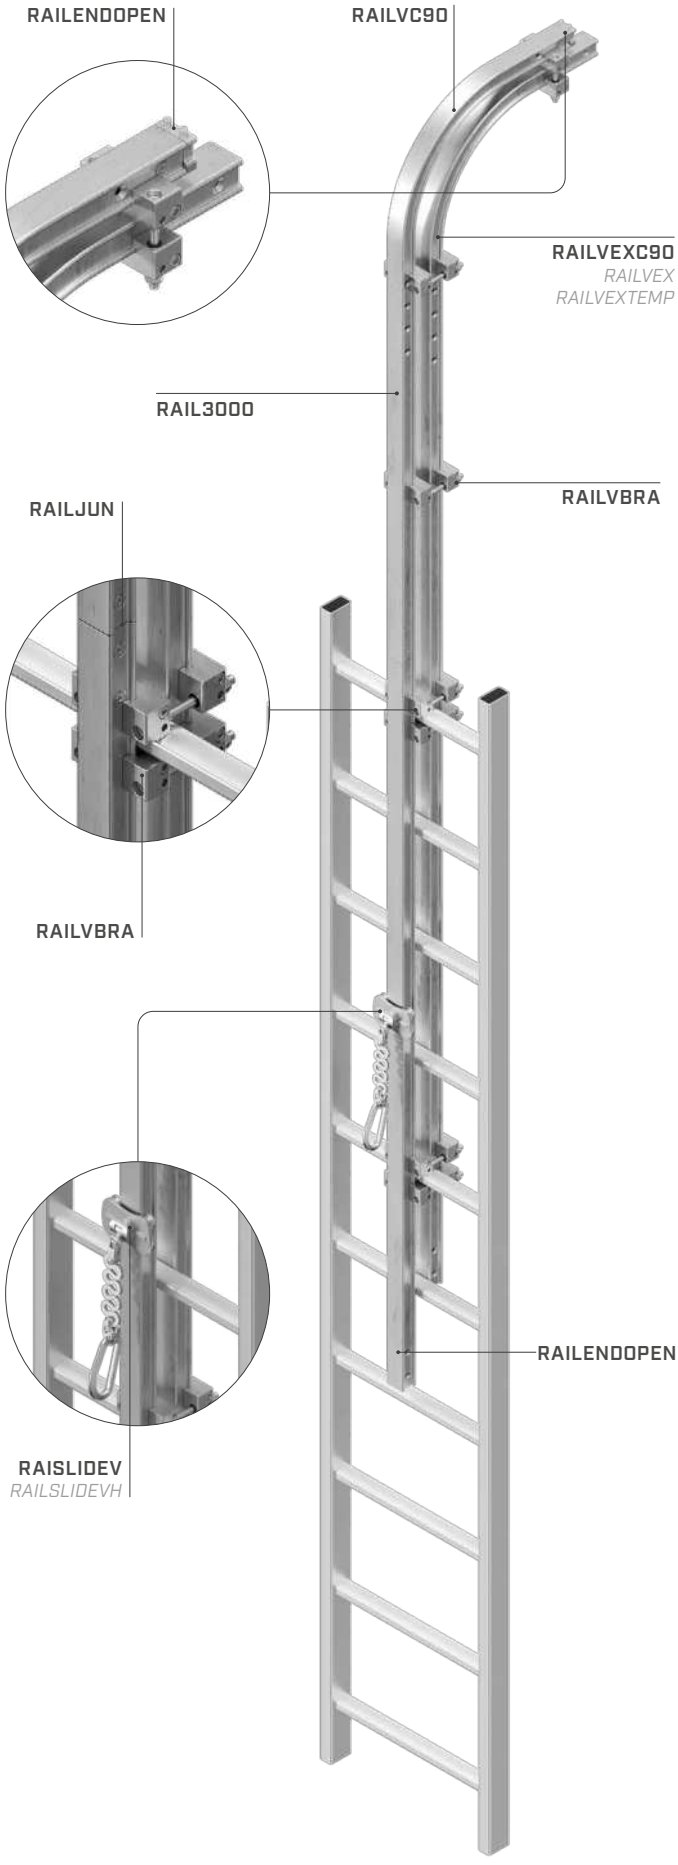

A4 AISI 316 **NOTE:**
For versions in A4, see the page on components (see page 76).