VERTIGRIP ON LADDER

VERTICAL LIFELINE ON LADDERS

EN 353-1:2014 + A1:2017 | RfU 11.119 | EN* 795:2012 A | AS/NZS 1891.3:2020

*only for VERTOP17, VERTOP09, VERTOP17A4, VERTOP09A4

MAXIMUM NUMBER OF USERS

STRONG


Complete system in AISI 316 stainless steel - AISI 304 stainless steel - EN AW 6082 aluminium alloy, guarantees excellent corrosion resistance.

FUNCTIONAL


Guided type fall arrester on rope with integrated energy absorber, which allows a controlled ascent and descent in safe conditions.


PRACTICAL

The system can be assembled off-centre on the ladder.

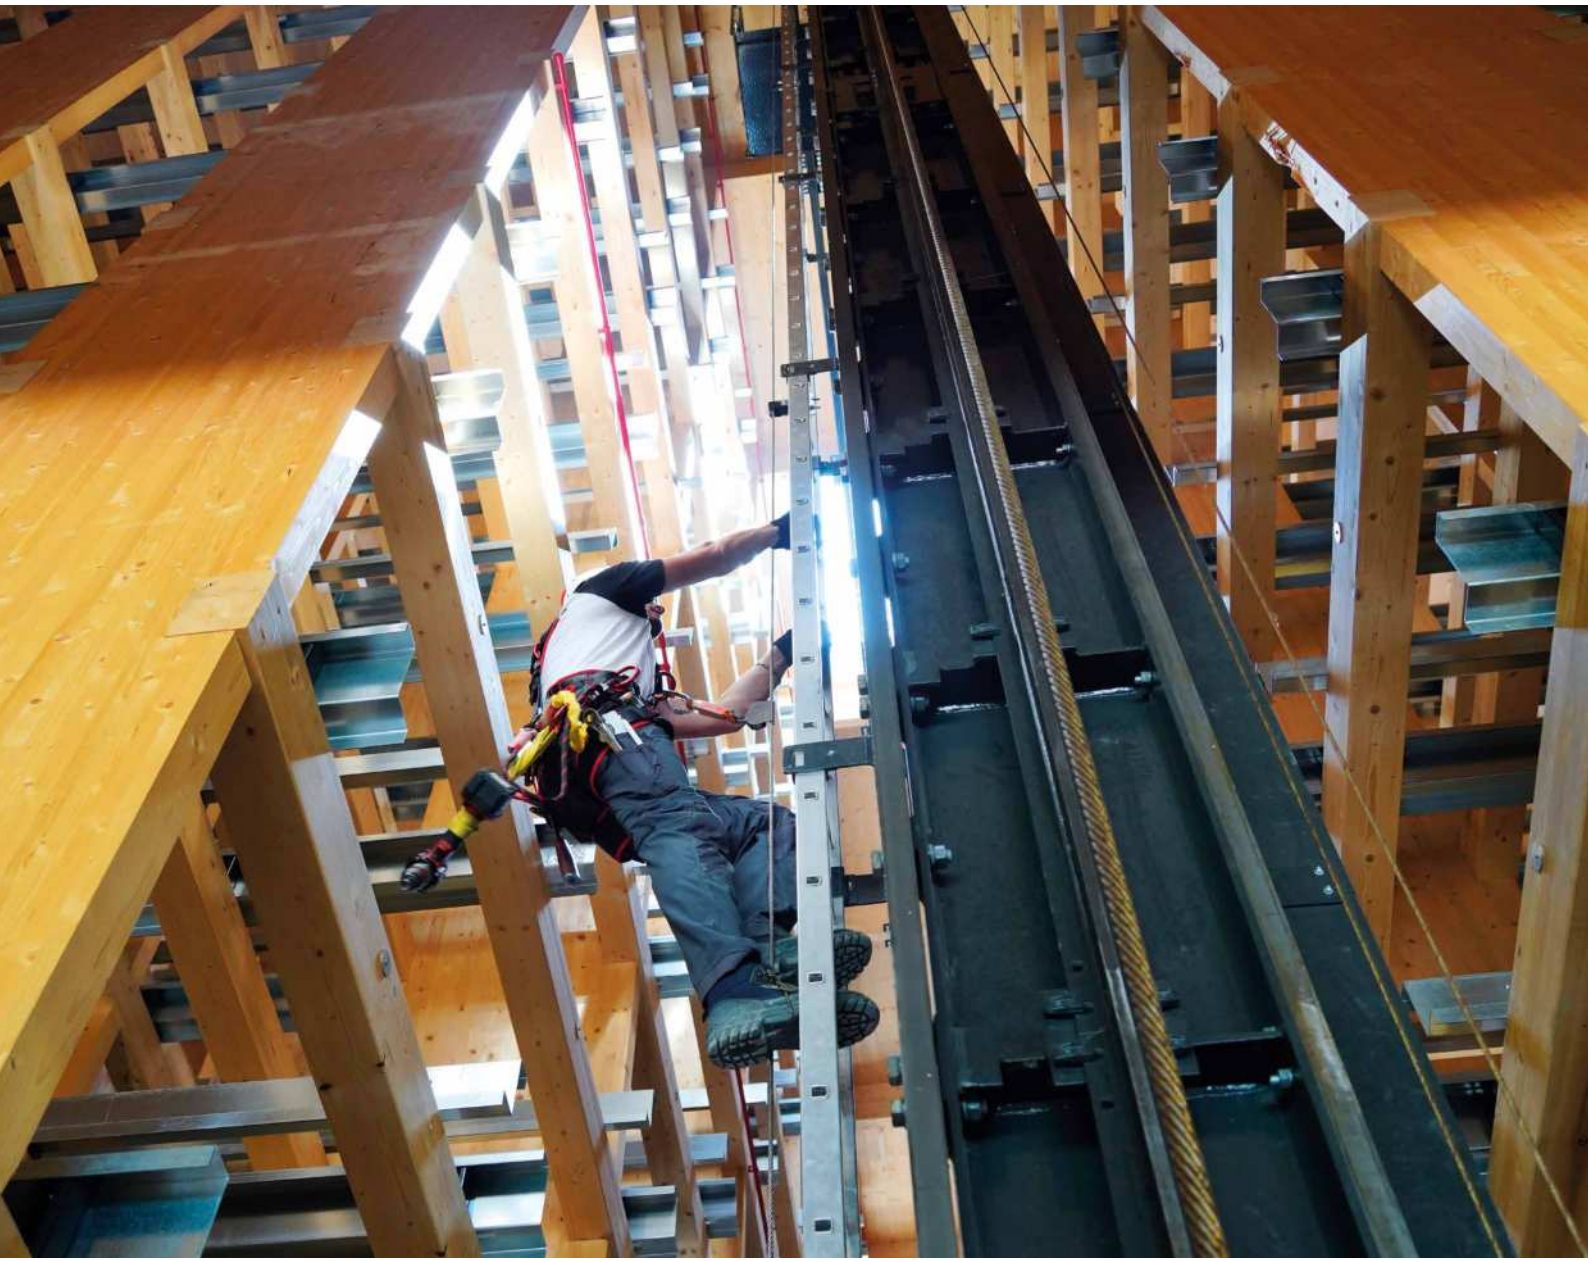


TECHNICAL DATA*

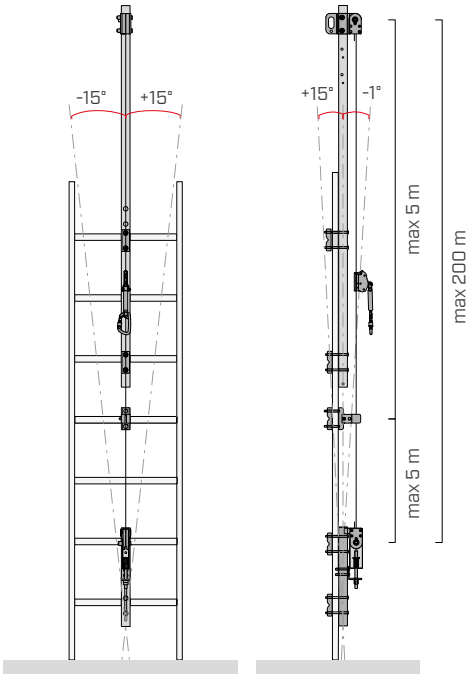




450 mm ≤ x_1 ≤ 700 mm




225 mm ≤ x ≤ 350 mm

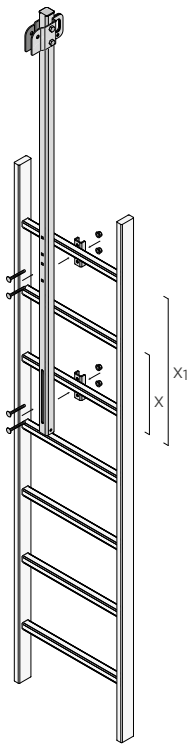

450 mm ≤ x_1 ≤ 700 mm
225 mm ≤ x ≤ 350 mm


** The values indicated are the result of experimental tests carried out under the supervision of third parties in accordance with the standard referred to. For a correct calculation report with minimum distances according to the standard requirements, the substructure must be checked by a qualified engineer before installation.*

step shape



B from 20 to 100 mm
H from 10 to 60 mm
d max 35 mm

VERTICAL LIFELINE COMPONENTS

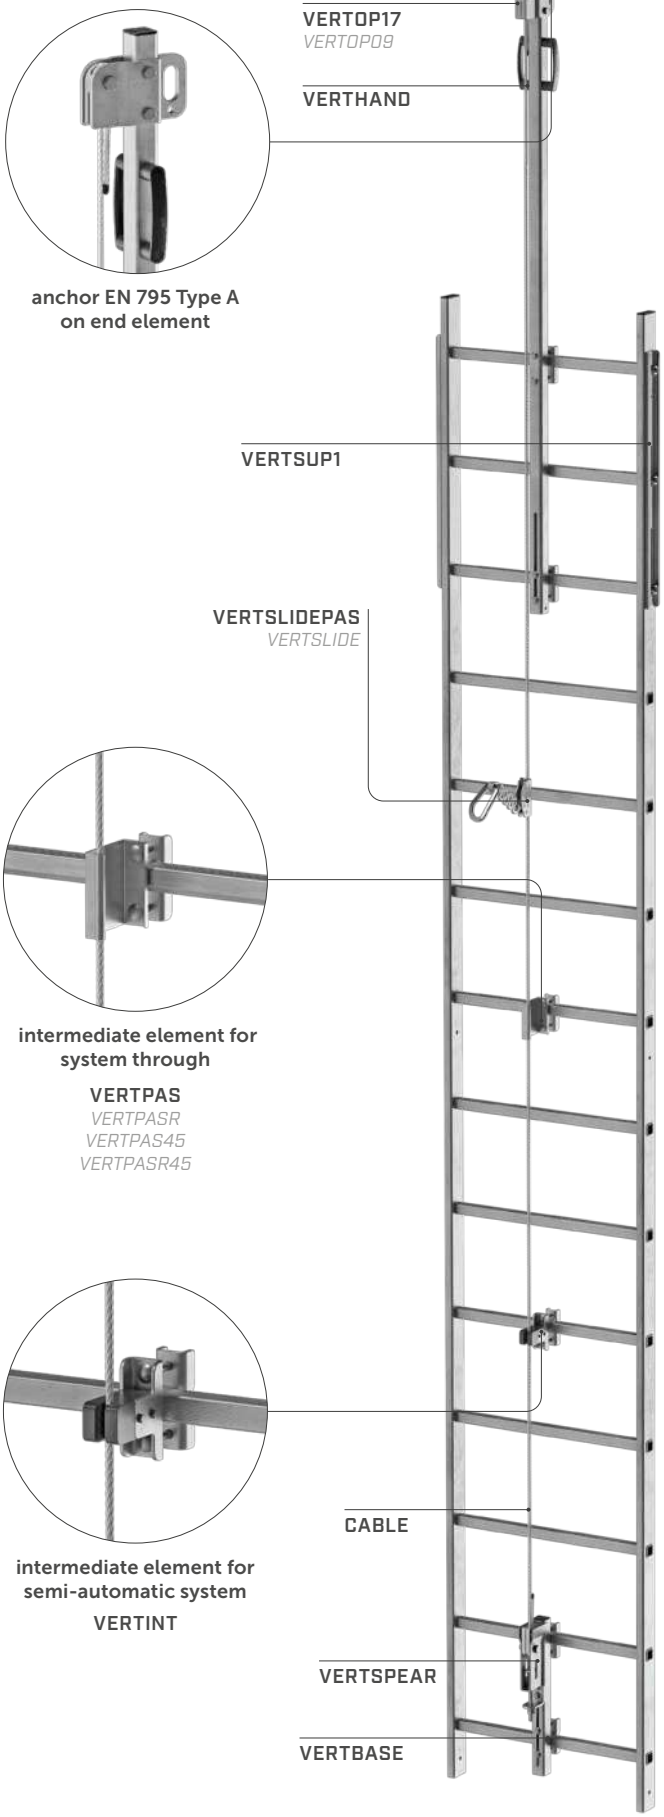

A4 AISI 316 **NOTE:**
For versions in A4, see the page on components (see page 90).