VERTIGRIP ON WALL

VERTICAL LIFELINE ON WALL

EN 353-1:2014 + A1:2017 | RfU 11.119 | AS/NZS 1891.3:2020



MAXIMUM NUMBER OF USERS

PRACTICAL
The special-purpose supports allow installation on substructures in CLT, concrete or steel.


ADJUSTABLE
Possibility of adjusting the distance of the lifeline from the wall.

FUNCTIONAL
It can be installed on walls inclined at an angle of up to 15° from the vertical.




TECHNICAL DATA*

substructure	minimum thickness	fasteners
CLT	100 mm	VGS Ø11
C20/25	140 mm	AB1 Ø12 AB1A4
		SKR Ø12
		rod Ø12
		VIN-FIX HYB-FIX
S235JR	6 mm	EKS + ULS + MUT

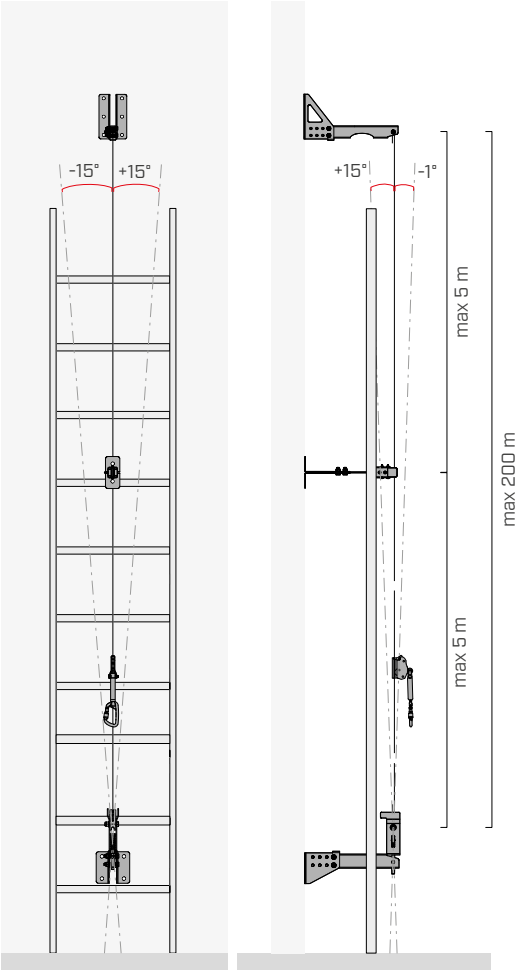

VERTICAL LIFELINE COMPONENTS

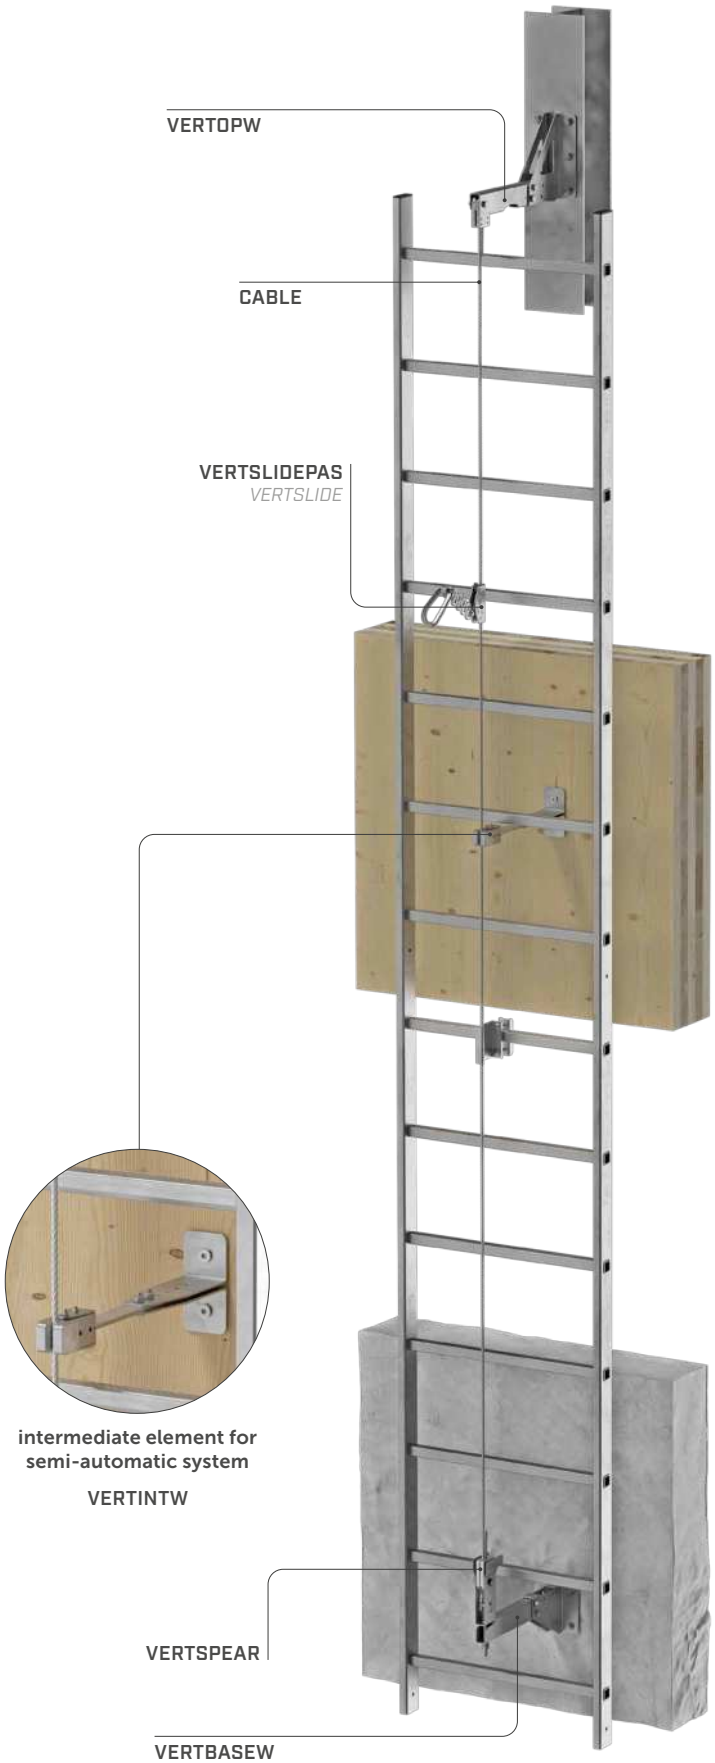

** The values indicated are derived from experimental tests carried out under the supervision of third party organisations according to the referenced standard. For a calculation report with minimum distances, according to the referenced normative requirements, the substructure must be verified by a qualified engineer before installation.*

A4 AISI 316 **NOTE:**
For versions in A4, see the page on components (see page 90).