SNAPSHOOT
ENGINEERED FOR A SAFER TOMORROW

현장을 이해하고, 필요한 솔루션을 연결합니다.

산업안전 · 추락방지 시스템
산업용 소재 · 건축자재
제품 제안부터 공급·시공·설치·교육까지



COMPANY INFORMATION

스냅슛 (SNAPSHOOT)

ADDRESS (15431) 경기도 안산시 단원구 풍전로 37-9 트리플렉스 301동 118호
TEL 0507-1374-9229
FAX 0504-481-6749
E-MAIL bkkim@snapshoot.co.kr

TECHNICAL DOCUMENTS

인증서 · 데이터시트 · 기술자료

제품의 규격과 성능, 인증 및 적용 조건을 확인하기 위한 자료입니다.

ABOUT SNAPSHOOT

제품 공급을 넘어, 현장에 맞는 해결책으로

스냅슛은 산업현장의 작업 환경과 요구 조건을 바탕으로
적합한 제품과 시스템을 제안합니다. 현장 실사를 통해 설치 조건을 확인하고,
공급부터 시공·설치 및 사용 교육까지 필요한 과정을 함께합니다.

추락방지 시스템

안전대부착설비 · 수평·수직 라이프라인
레일 시스템 · 리지드 포스트

밀폐공간 진입·구조 솔루션

데빗암 · 삼각대 · 구조용 윈치
윈치 안전블록 · 구조장비

산업안전 보호구

전신형 안전대 · 랜야드 · 안전블록
작업 환경에 맞춘 개인보호구

산업용 소재·건축자재

산업용 테이프 · 접착제 · 기능성 소재
구조용 스크류 · 목조건축 자재

SNAPSHOOT
ENGINEERED FOR A SAFER TOMORROW

홈페이지 바로가기 →
문서 라이브러리 바로가기 →
시공사례 바로가기 →
문의하기 →

본 페이지는 스냅슛의 자료 제공 안내용 표지입니다. 첨부된 인증서 및 기술자료의 발행 주체, 인증 대상과 적용 범위는 해당 원문을 기준으로 확인해 주세요.

H-RAIL OVERHEAD

HORIZONTAL OVERHEAD RAIL SYSTEM

ADAPTABLE
The rail can be mounted on different types of substructures using specific plates.

FUNCTIONAL
The rail allows operators to work with their hands free and in safety by using sliding and retractable devices.

SAFE
The system has been tested for use in rope access work with multiple operators.


EN 795:2012 D	CEN/TS 16415:2013	UNI 11578:2015 D	AS/NZS 1891.4:2009	AS/NZS 1891.2:2001	BS 8610:2017 01 - 02 - 03 - 05



MAXIMUM NUMBER OF USERS	-
LOAD DIRECTION	
TYPES OF APPLICATION	



H-RAIL COMPONENTS

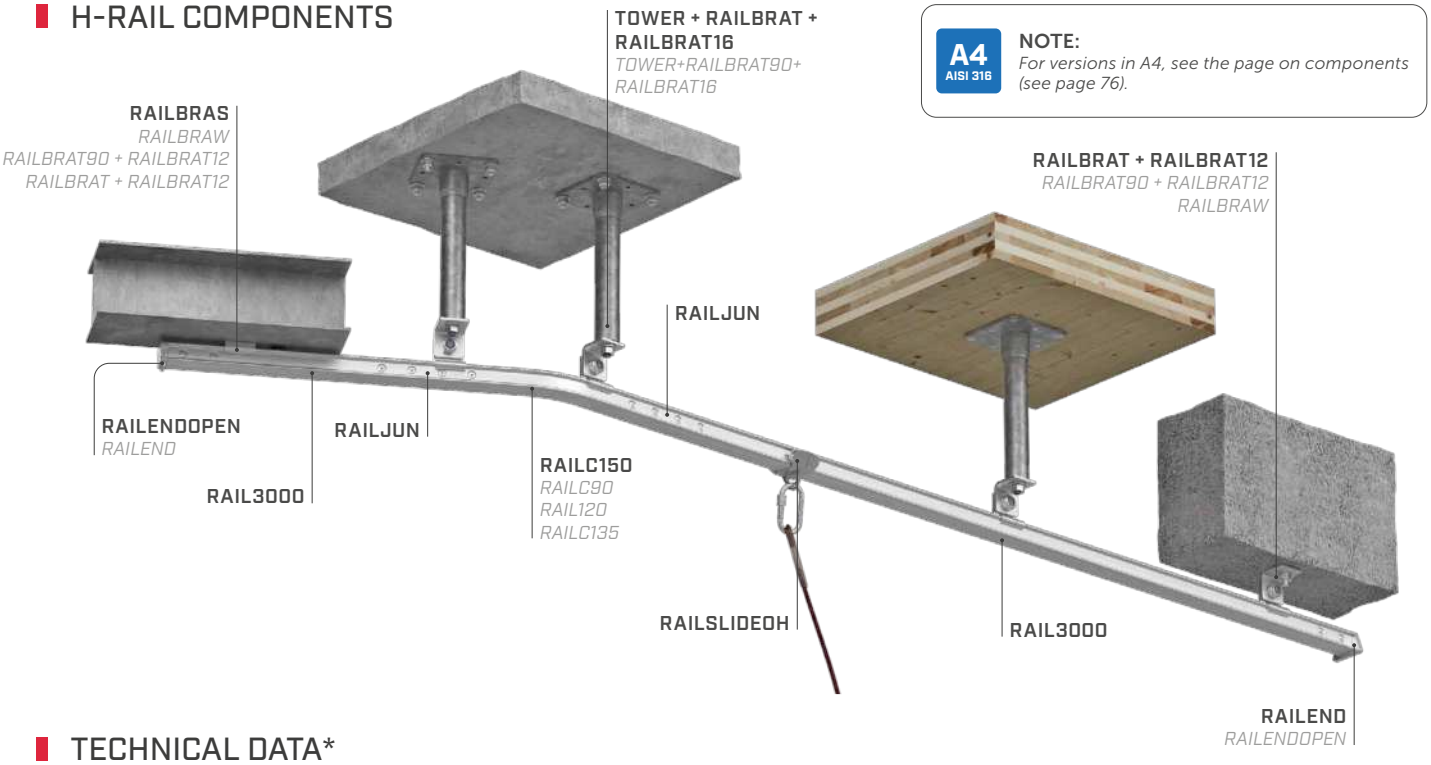


A4 AISI 316

NOTE:
For versions in A4, see the page on components (see page 76).

TECHNICAL DATA*

substructure	minimum thickness	support	fasteners
GL24h	160 mm	RAILBRAT + RAILBRATW RAILBRAT90 + RAILBRATW RAILBRAW	VGS (EVO) Ø11
CLT	160 mm	RAILBRAT + RAILBRATW RAILBRAT90 + RAILBRATW RAILBRAW	VGS (EVO) Ø13
C20/25	140 mm	RAILBRAT + RAILBRAT12 RAILBRAT90 + RAILBRAT12 RAILBRAW	AB1 M12 INA 5.8 M12 VIN-FIX SKR Ø12

substructure	minimum thickness	support	fasteners
S235JR	5 mm	RAILBRAT + RAILBRAT12 RAILBRAT90 + RAILBRAT12 RAILBRAW RAILBRAS	DIN 933 M12 MUT AI 985 M12 DIN 7991 M10
TOWER(1)	5 mm	RAILBRAT + RAILBRAT16 RAILBRAT90 + RAILBRAT16	-



** The values indicated are the result of experimental tests carried out under the supervision of third parties in accordance with the standard referred to. For a correct calculation report with minimum distances according to the standard requirements, the substructure must be checked by a qualified engineer before installation.*

(1) For TOWER fastening, see page 30.

fall protection restraint			EN 795:2012 D	CEN/TS 16415:2013	UNI 11578:2015 D	AS/NZS 1891.2:2001	AS/NZS 1891.4:2009	BS 8610:2017 01 - 02 - 05
users (system)		no.	4			N.A.		1
users (span)		no.	4			1		1
maximum span	x_{max}	[m]	6			6		6

suspension			EN 795:2012 D	CEN/TS 16415:2013	UNI 11578:2015 D	AS/NZS 1891.2:2001	AS/NZS 1891.4:2009	BS 8610:2017 03 - 05
users (system)		no.	4			N.A.		1
users (span)		no.	2			2		1
maximum span	x_{max}	[m]	2			2		2

For H-RAIL OVERHEAD components, see page 76.