SNAPSHOOT
ENGINEERED FOR A SAFER TOMORROW

현장을 이해하고, 필요한 솔루션을 연결합니다.

산업안전 · 추락방지 시스템
산업용 소재 · 건축자재
제품 제안부터 공급·시공·설치·교육까지



COMPANY INFORMATION

스냅슛 (SNAPSHOOT)

ADDRESS (15431) 경기도 안산시 단원구 풍전로 37-9 트리플렉스 301동 118호
TEL 0507-1374-9229
FAX 0504-481-6749
E-MAIL bkkim@snapshoot.co.kr

TECHNICAL DOCUMENTS

인증서 · 데이터시트 · 기술자료

제품의 규격과 성능, 인증 및 적용 조건을 확인하기 위한 자료입니다.

ABOUT SNAPSHOOT

제품 공급을 넘어, 현장에 맞는 해결책으로

스냅슛은 산업현장의 작업 환경과 요구 조건을 바탕으로
적합한 제품과 시스템을 제안합니다. 현장 실사를 통해 설치 조건을 확인하고,
공급부터 시공·설치 및 사용 교육까지 필요한 과정을 함께합니다.

추락방지 시스템

안전대부착설비 · 수평·수직 라이프라인
레일 시스템 · 리지드 포스트

밀폐공간 진입·구조 솔루션

데빗암 · 삼각대 · 구조용 윈치
윈치 안전블록 · 구조장비

산업안전 보호구

전신형 안전대 · 랜야드 · 안전블록
작업 환경에 맞춘 개인보호구

산업용 소재·건축자재

산업용 테이프 · 접착제 · 기능성 소재
구조용 스크류 · 목조건축 자재

SNAPSHOOT
ENGINEERED FOR A SAFER TOMORROW

홈페이지 바로가기 →
문서 라이브러리 바로가기 →
시공사례 바로가기 →
문의하기 →

본 페이지는 스냅슛의 자료 제공 안내용 표지입니다. 첨부된 인증서 및 기술자료의 발행 주체, 인증 대상과 적용 범위는 해당 원문을 기준으로 확인해 주세요.


PATROL + TOWER XL


LIFELINE ON SUPPORT WITH INCREASED BOTTOM PLATE FOR TIMBER, STEEL AND CONCRETE ROOFS

VERSATILE
Compatible with different types of structures thanks to tested fastenings.


ADAPTABLE
Adjustable support height between 300 and 800 mm to adapt to different roofing thicknesses.

SAFE
The increased bottom plate distributes the actions arising from the anchoring devices over a larger area.

	EN 795:2012 C · CEN/TS 16415:2013 · UNI 11578:2015 C
	
MAXIMUM NUMBER OF USERS	
LOAD DIRECTION	
TYPES OF APPLICATION	

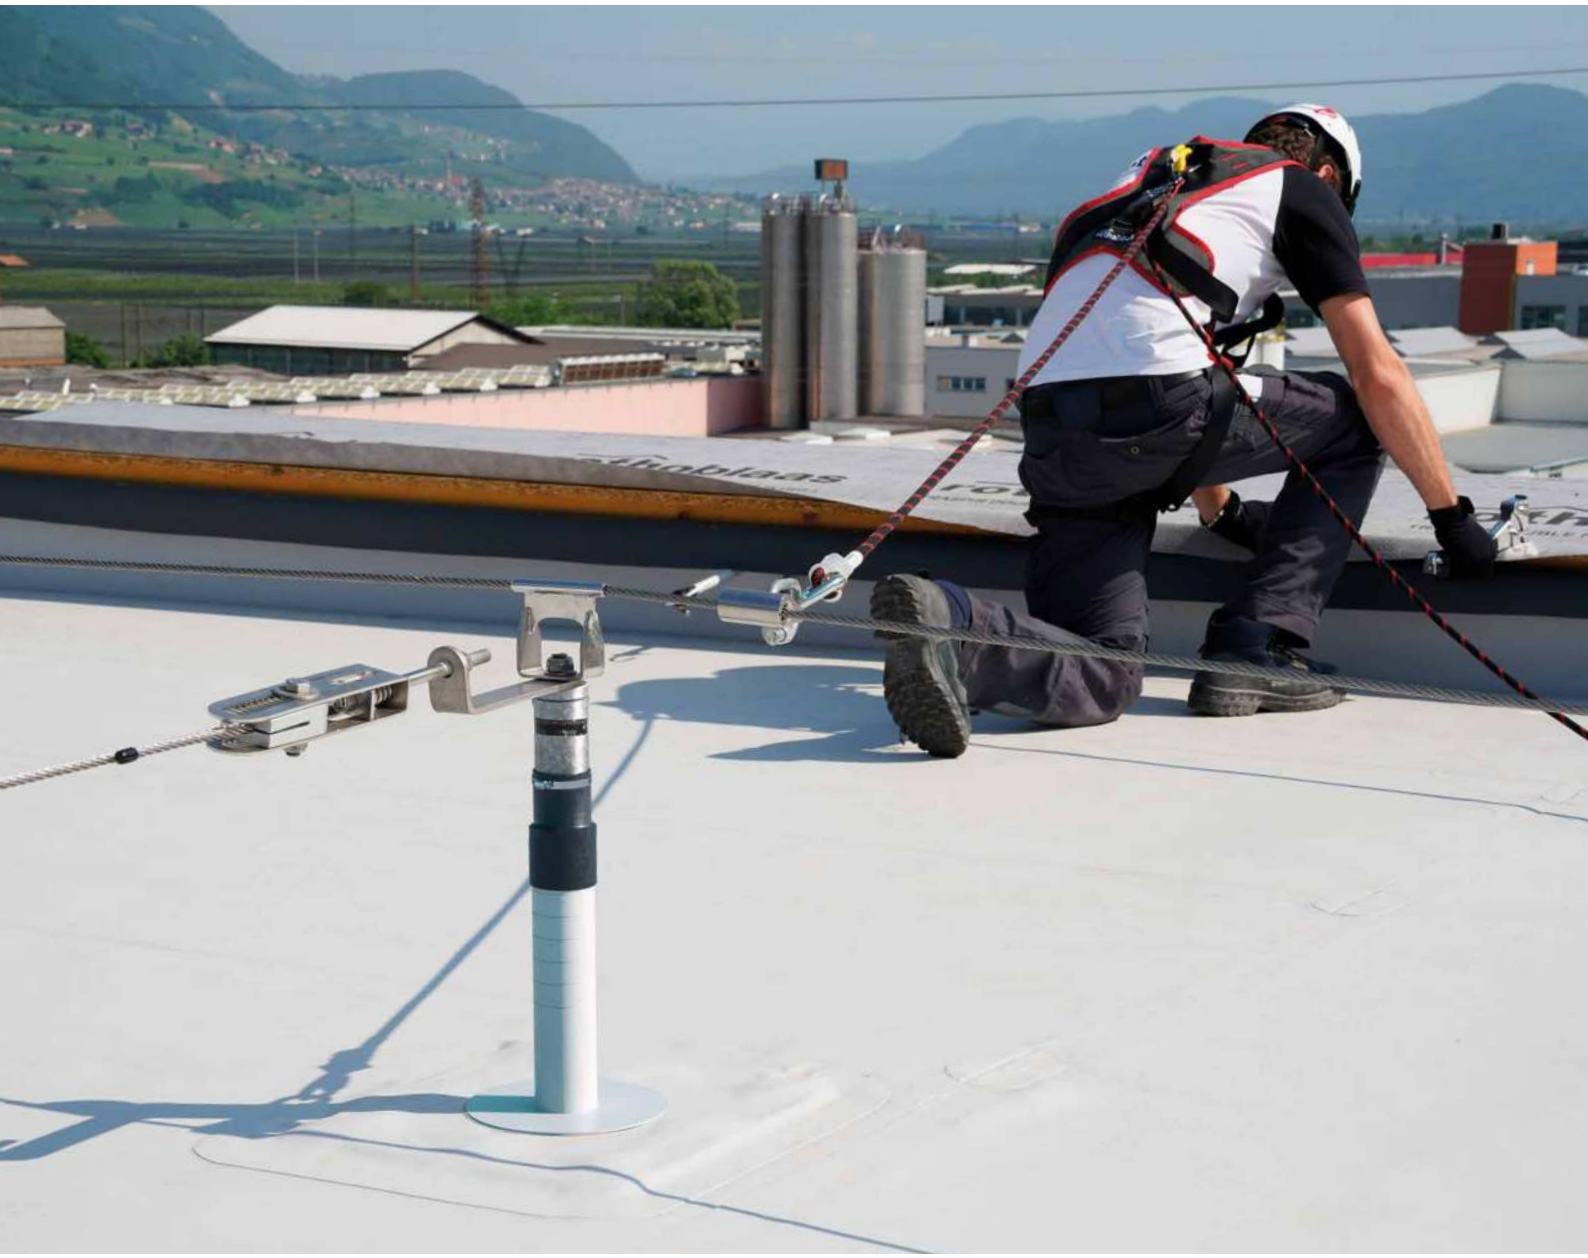

PATROL LIFELINE COMPONENTS

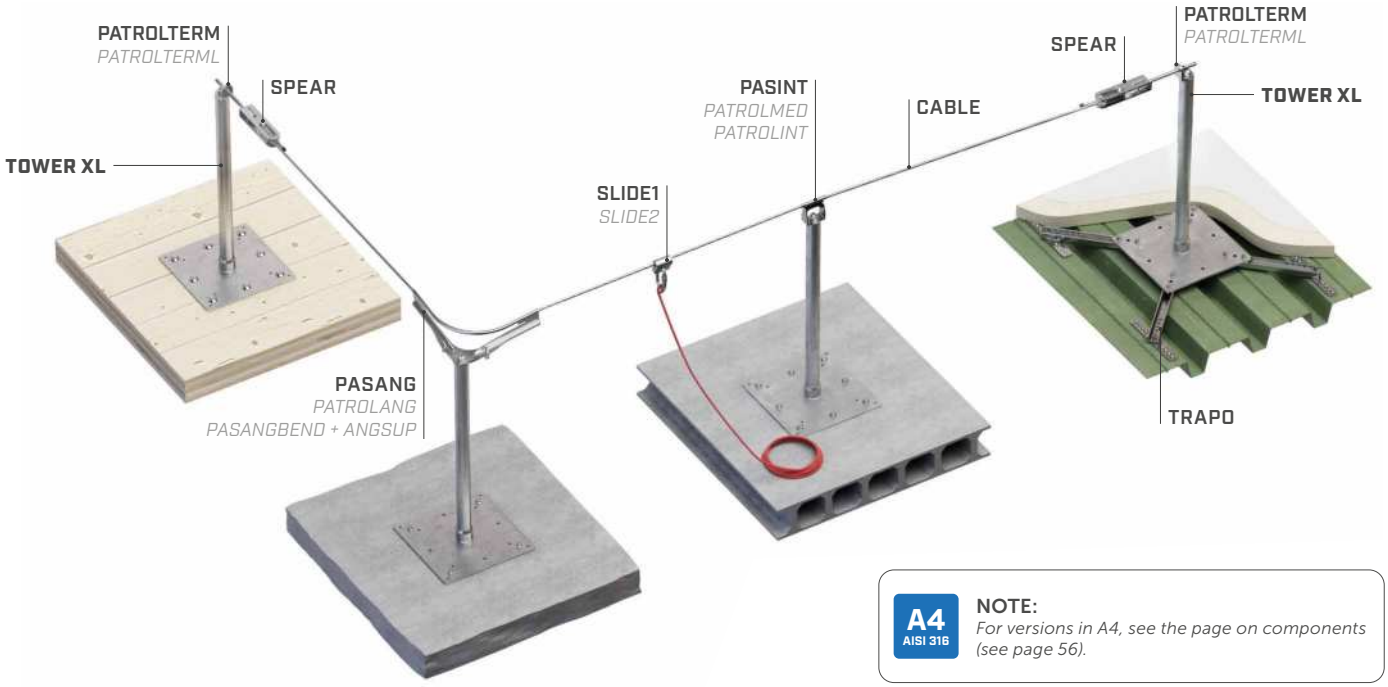


A4 AISI 316 **NOTE:**
For versions in A4, see the page on components (see page 56).

TECHNICAL DATA*

substructure	minimum thickness	fasteners
CLT	100 mm	VGS (EVO) Ø11 HUS Ø10
C20/25	110 mm	AB7 M10 SKR Ø10 INA 5.8 M10 VIN - FIX

substructure	minimum thickness	fasteners
C45/55	30 mm	BEF TOWERXL1 Ø10
	0,75 mm	TRAPO SET

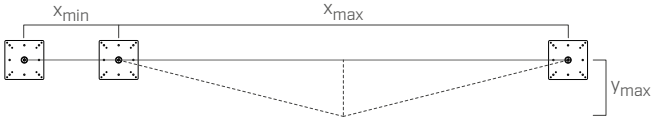


			SPEAR
			EN 795:2012 C · CEN/TS 16415:2013 · UNI 11578:2015 C
users		no.	
minimum span	x_{min}	[m]	2
maximum span	x_{max}	[m]	15
maximum deflection	y_{max}	[m]	3,6

** The values indicated are the result of experimental tests carried out under the supervision of third parties in accordance with the standard referred to. For a correct calculation report with minimum distances according to the standard requirements, the substructure must be checked by a qualified engineer before installation.*

TOWER XL | CODES AND DIMENSIONS

CODE	material	d_1 [mm]	d_1 [in]	B [mm]	B [in]	H [mm]	H [in]	L [mm]	L [in]	pcs
TOWERXL300	S235JR zinc plated steel S235 HDG	48	1.89	350	13 3/4	300	11 3/4	350	13 3/4	1
TOWERXL400		48	1.89	350	13 3/4	400	15 3/4	350	13 3/4	1
TOWERXL500		48	1.89	350	13 3/4	500	19 3/4	350	13 3/4	1
TOWERXL600		48	1.89	350	13 3/4	600	23 5/8	350	13 3/4	1
TOWERXL700		48	1.89	350	13 3/4	700	27 1/2	350	13 3/4	1
TOWERXL800		48	1.89	350	13 3/4	800	31 1/2	350	13 3/4	1
TOWERXL1000		48	1.89	350	13 3/4	1000	39 3/8	350	13 3/4	1



For related BEFTOWERXL, TRAPPO, MANEPDM, MANLEAD, MAN50, MANPOST1, MANPOST2, TOPLATE 2.0 products, see page 250.