SNAPSHOOT
ENGINEERED FOR A SAFER TOMORROW

현장을 이해하고, 필요한 솔루션을 연결합니다.

산업안전 · 추락방지 시스템
산업용 소재 · 건축자재
제품 제안부터 공급·시공·설치·교육까지



COMPANY INFORMATION

스냅슛 (SNAPSHOOT)

ADDRESS (15431) 경기도 안산시 단원구 풍전로 37-9 트리플렉스 301동 118호
TEL 0507-1374-9229
FAX 0504-481-6749
E-MAIL bkkim@snapshoot.co.kr

TECHNICAL DOCUMENTS

인증서 · 데이터시트 · 기술자료

제품의 규격과 성능, 인증 및 적용 조건을 확인하기 위한 자료입니다.

ABOUT SNAPSHOOT

제품 공급을 넘어, 현장에 맞는 해결책으로

스냅슛은 산업현장의 작업 환경과 요구 조건을 바탕으로
적합한 제품과 시스템을 제안합니다. 현장 실사를 통해 설치 조건을 확인하고,
공급부터 시공·설치 및 사용 교육까지 필요한 과정을 함께합니다.

추락방지 시스템

안전대부착설비 · 수평·수직 라이프라인
레일 시스템 · 리지드 포스트

밀폐공간 진입·구조 솔루션

데빗암 · 삼각대 · 구조용 윈치
윈치 안전블록 · 구조장비

산업안전 보호구

전신형 안전대 · 랜야드 · 안전블록
작업 환경에 맞춘 개인보호구

산업용 소재·건축자재

산업용 테이프 · 접착제 · 기능성 소재
구조용 스크류 · 목조건축 자재

SNAPSHOOT
ENGINEERED FOR A SAFER TOMORROW

홈페이지 바로가기 →
문서 라이브러리 바로가기 →
시공사례 바로가기 →
문의하기 →

본 페이지는 스냅슛의 자료 제공 안내용 표지입니다. 첨부된 인증서 및 기술자료의 발행 주체, 인증 대상과 적용 범위는 해당 원문을 기준으로 확인해 주세요.

PATROL + BLOCK


LIFELINE ON SUPPORT WITH BALLAST FOR FLAT ROOFS

WITHOUT DRILLING
It is designed for installation on flat roofs, and does not require to drill the roof covering, avoiding thermal bridging and preserving the waterproofing layer of the structure.


FLAT ROOFS
Designed for flat roofs with inclines up to 5° with PVC, TPO or bituminous final covering, with or without gravel.

SIMPLE
Concrete ballast slabs in standard sizes simplify the installation.


	EN 795:2012 C	CEN/TS 16415:2013	UNI 11578:2015 C
	PVC	TPO	BYTUM
MAXIMUM NUMBER OF USERS			
LOAD DIRECTION			
TYPES OF APPLICATION			

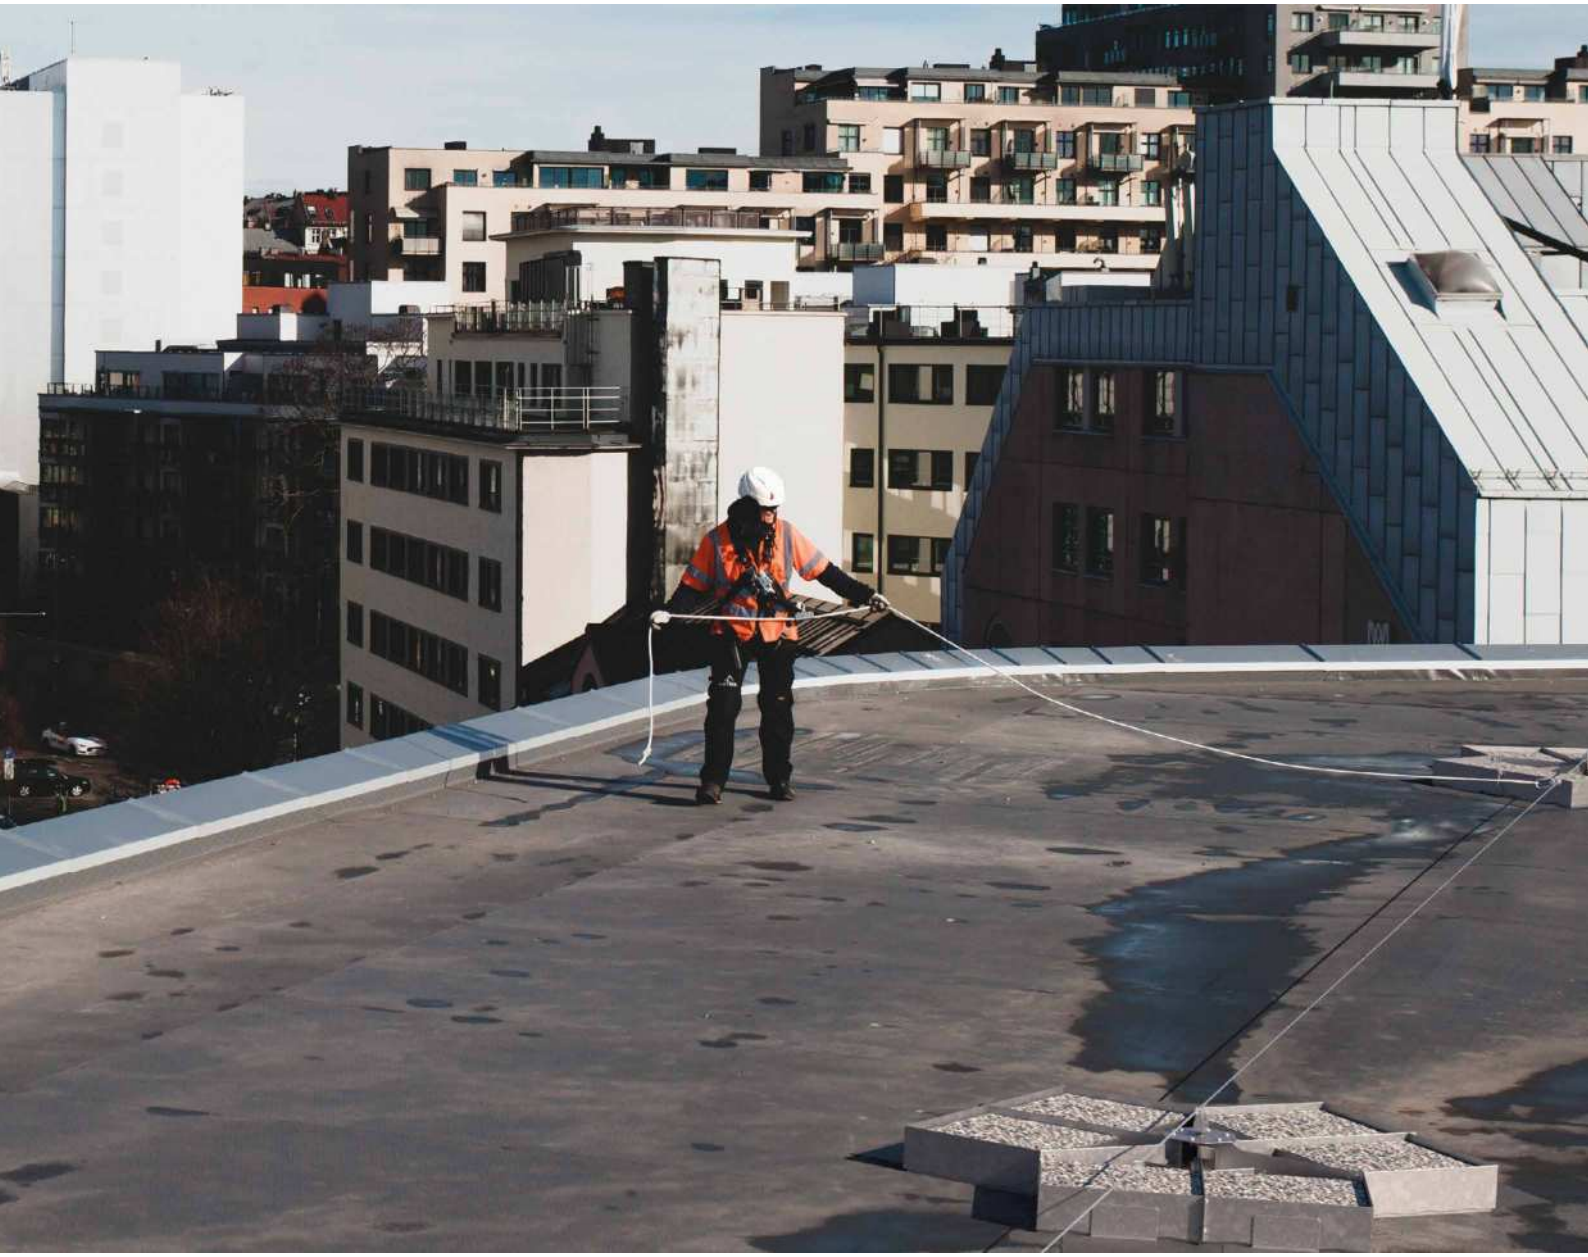

PATROL LIFELINE COMPONENTS

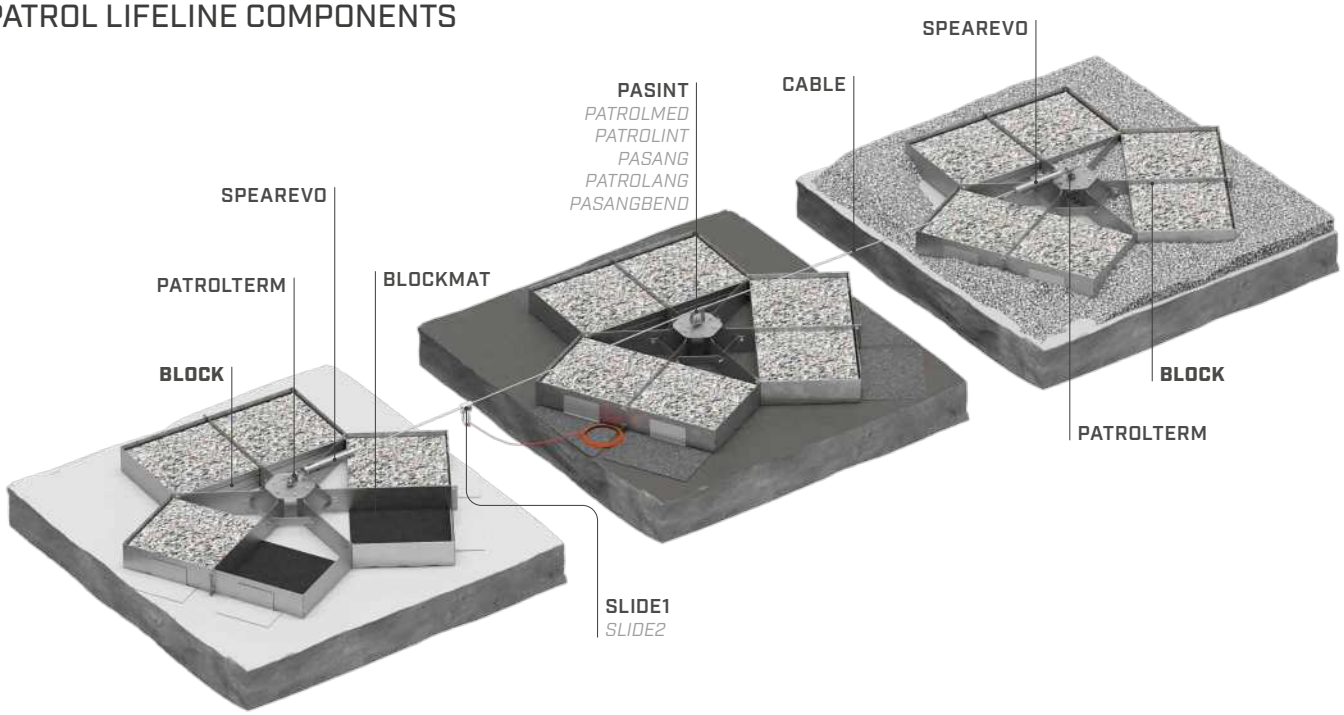


TECHNICAL DATA*



			SPEAREVO
			EN 795:2012 C / CEN/TS 16415:2013 / UNI 11578:2015 C
users		no.	
minimum span	x_{min}	[m]	2
maximum span	x_{max}	[m]	10
maximum deflection	y_{max}	[m]	2

** The values indicated are the result of experimental tests carried out under the supervision of third parties in accordance with the standard referred to. For a correct calculation report with minimum distances according to the standard requirements, the substructure must be checked by a qualified engineer before installation.*

BLOCK | CODES AND DIMENSIONS

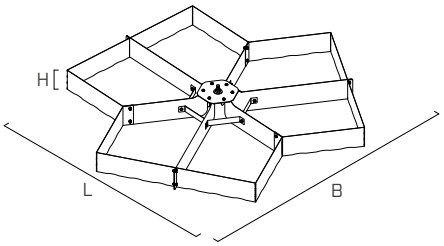CODE	material		B [mm] *[in]*	H [mm] *[in]*	L [mm] *[in]*	pcs	
BLOCK	AISI 304 stainless steel grade 1.4301	A2 AISI 304	1870 *73 5/8*	165 *6 1/2*	1645 *64 3/4*	1	
BLOCKPLATE	AISI 304 stainless steel grade 1.4301	A2 AISI 304	120 *4 3/4*	120 *4 3/4*	240 *9 7/16*	1	

BLOCKMAT	optional
ballast weight	18 bricks x 21,5 kg = 387 kg
total weight	400 kg

COMPLEMENTARY PRODUCTS

CODE	description	B [mm] *[in]*	L [mm] *[in]*	s [mm] *[in]*	pcs	
BLOCKMAT	BLOCKMAT mats not included in the supply of the BLOCK item (3 pieces per BLOCK are required) it can be ordered separately	550 *21 5/8*	1050 *41 5/16*	6 *0.24*	1	