SNAPSHOOT
ENGINEERED FOR A SAFER TOMORROW

현장을 이해하고, 필요한 솔루션을 연결합니다.

산업안전 · 추락방지 시스템
산업용 소재 · 건축자재
제품 제안부터 공급·시공·설치·교육까지



COMPANY INFORMATION

스냅슛 (SNAPSHOOT)

ADDRESS (15431) 경기도 안산시 단원구 풍전로 37-9 트리플렉스 301동 118호
TEL 0507-1374-9229
FAX 0504-481-6749
E-MAIL bkkim@snapshoot.co.kr

TECHNICAL DOCUMENTS

인증서 · 데이터시트 · 기술자료

제품의 규격과 성능, 인증 및 적용 조건을 확인하기 위한 자료입니다.

ABOUT SNAPSHOOT

제품 공급을 넘어, 현장에 맞는 해결책으로

스냅슛은 산업현장의 작업 환경과 요구 조건을 바탕으로
적합한 제품과 시스템을 제안합니다. 현장 실사를 통해 설치 조건을 확인하고,
공급부터 시공·설치 및 사용 교육까지 필요한 과정을 함께합니다.

추락방지 시스템

안전대부착설비 · 수평·수직 라이프라인
레일 시스템 · 리지드 포스트

밀폐공간 진입·구조 솔루션

데빗암 · 삼각대 · 구조용 윈치
윈치 안전블록 · 구조장비

산업안전 보호구

전신형 안전대 · 랜야드 · 안전블록
작업 환경에 맞춘 개인보호구

산업용 소재·건축자재

산업용 테이프 · 접착제 · 기능성 소재
구조용 스크류 · 목조건축 자재

SNAPSHOOT
ENGINEERED FOR A SAFER TOMORROW

홈페이지 바로가기 →
문서 라이브러리 바로가기 →
시공사례 바로가기 →
문의하기 →

본 페이지는 스냅슛의 자료 제공 안내용 표지입니다. 첨부된 인증서 및 기술자료의 발행 주체, 인증 대상과 적용 범위는 해당 원문을 기준으로 확인해 주세요.

PATROL + TOWER

LIFELINE ON SUPPORT FOR TIMBER, CONCRETE AND STEEL ROOFS

ADAPTABLE
Support height between 300 and 800 mm to adapt to different roofing thicknesses.


MINIMALIST DESIGN
Small-sized cylindrical support to minimise the visual impact on the roof.

EFFECTIVE
Controlled deformation device to reduce the load on the fastening systems and structure.

	EN 795:2012 C	CEN/TS 16415:2013	UNI 11578:2015 C	AS/NZS 1891.2:2001	AS/NZS 1891.4:2009
					
MAXIMUM NUMBER OF USERS					
LOAD DIRECTION					
TYPES OF APPLICATION					



PATROL LIFELINE COMPONENTS

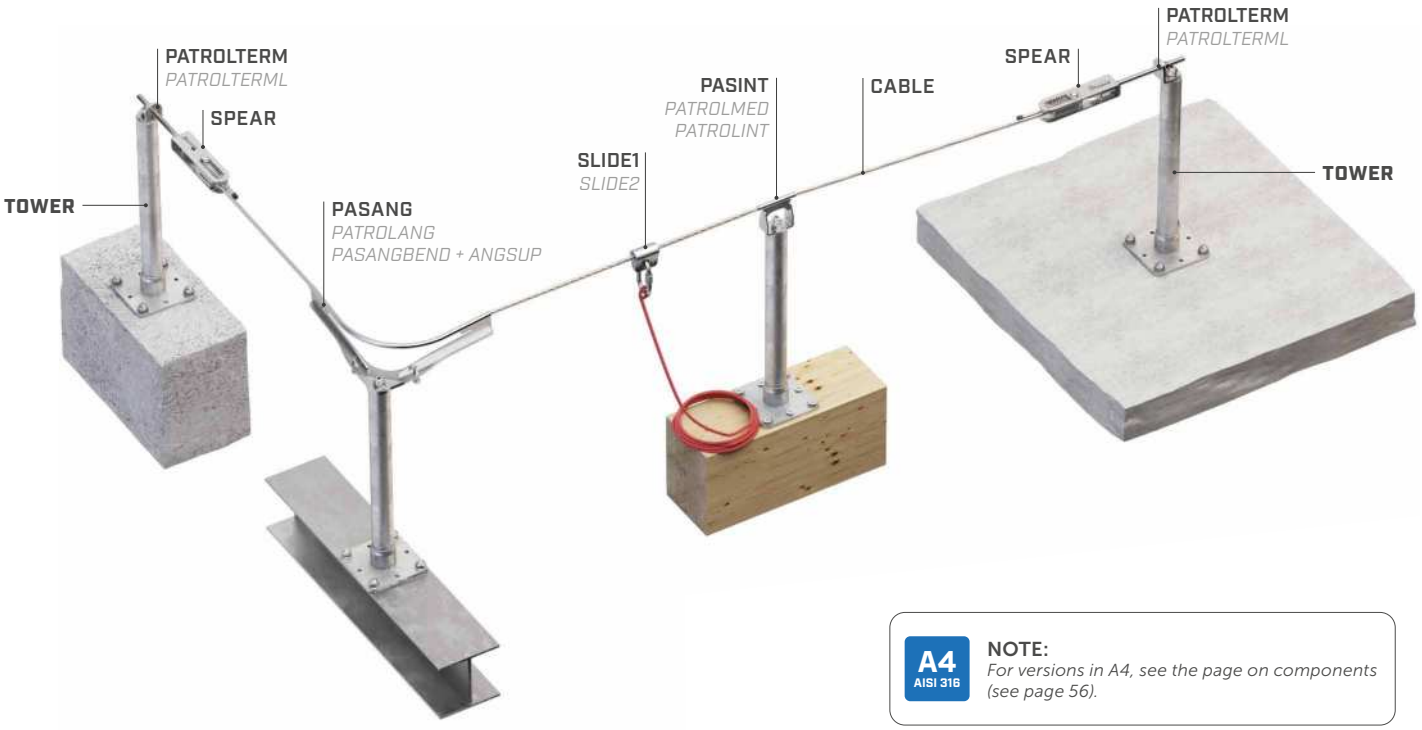


A4 AISI 316 **NOTE:**
For versions in A4, see the page on components (see page 56).

TECHNICAL DATA*

substructure	minimum thickness	fasteners
GL24h	160 mm	VGS (EVO) Ø9 ULS Ø10
CLT	200 mm	VGS (EVO) Ø9 ULS Ø10
S235JR	6 mm	DIN 933 M12 DIN 125-1A M12 MUT AI 985 M12

substructure	minimum thickness	fasteners
C20/25	140 mm	AB1 M12 SKR Ø12 INA 5.8 M12 VIN-FIX HYB-FIX

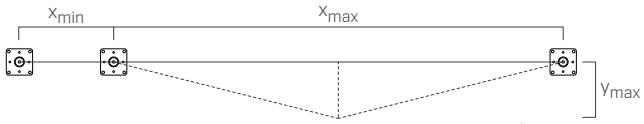


			SPEAR	
			EN 795:2012 C / CEN/TS 16415:2013 / UNI 11578:2015 C	AS/NZS 1891.2:2001 / AS/NZS 1891.4:2009
users		no.		
minimum span	x_{min}	[m]	2	2
maximum span	x_{max}	[m]	15	15
maximum deflection	y_{max}	[m]	3,60	3,60

** The values indicated are the result of experimental tests carried out under the supervision of third parties in accordance with the standard referred to. For a correct calculation report with minimum distances according to the standard requirements, the substructure must be checked by a qualified engineer before installation.*

TOWER | CODES AND DIMENSIONS

CODE	material	d_1		B		H		L		pcs
		[mm]	*[in]*	[mm]	*[in]*	[mm]	*[in]*	[mm]	*[in]*	
TOWER300	S235JR zinc plated steel S235 HDG	48	*1.89*	150	*6*	300	*11 3/4*	150	*6*	1
TOWER400		48	*1.89*	150	*6*	400	*15 3/4*	150	*6*	1
TOWER500		48	*1.89*	150	*6*	500	*19 3/4*	150	*6*	1
TOWER600		48	*1.89*	150	*6*	600	*23 5/8*	150	*6*	1
TOWER700		48	*1.89*	150	*6*	700	*27 1/2*	150	*6*	1
TOWER800		48	*1.89*	150	*6*	800	*31 1/2*	150	*6*	1
TOWER22500		48	*1.89*	150	*6*	500	*19 3/4*	150	*6*	1



For related TOWERPEAK, TOWERSLOPE, TOWLATEVO and TOPLATE products, see page 250.