SNAPSHOOT
ENGINEERED FOR A SAFER TOMORROW

현장을 이해하고, 필요한 솔루션을 연결합니다.

산업안전 · 추락방지 시스템
산업용 소재 · 건축자재
제품 제안부터 공급·시공·설치·교육까지



COMPANY INFORMATION

스냅슛 (SNAPSHOOT)

ADDRESS (15431) 경기도 안산시 단원구 풍전로 37-9 트리플렉스 301동 118호
TEL 0507-1374-9229
FAX 0504-481-6749
E-MAIL bkkim@snapshoot.co.kr

TECHNICAL DOCUMENTS

인증서 · 데이터시트 · 기술자료

제품의 규격과 성능, 인증 및 적용 조건을 확인하기 위한 자료입니다.

ABOUT SNAPSHOOT

제품 공급을 넘어, 현장에 맞는 해결책으로

스냅슛은 산업현장의 작업 환경과 요구 조건을 바탕으로
적합한 제품과 시스템을 제안합니다. 현장 실사를 통해 설치 조건을 확인하고,
공급부터 시공·설치 및 사용 교육까지 필요한 과정을 함께합니다.

추락방지 시스템

안전대부착설비 · 수평·수직 라이프라인
레일 시스템 · 리지드 포스트

밀폐공간 진입·구조 솔루션

데빗암 · 삼각대 · 구조용 윈치
윈치 안전블록 · 구조장비

산업안전 보호구

전신형 안전대 · 랜야드 · 안전블록
작업 환경에 맞춘 개인보호구

산업용 소재·건축자재

산업용 테이프 · 접착제 · 기능성 소재
구조용 스크류 · 목조건축 자재

SNAPSHOOT
ENGINEERED FOR A SAFER TOMORROW

홈페이지 바로가기 →
문서 라이브러리 바로가기 →
시공사례 바로가기 →
문의하기 →

본 페이지는 스냅슛의 자료 제공 안내용 표지입니다. 첨부된 인증서 및 기술자료의 발행 주체, 인증 대상과 적용 범위는 해당 원문을 기준으로 확인해 주세요.


PATROL + T-CLAMP

LIFELINE ON SUPPORT FOR CONTINUOUS ROOFS

VERSATILE
A versatile system with special clamps allowing installation on various types of metal roofs.


ADAPTABLE
The universal plates, available in various sizes, guarantee a solution for the different spans between the profiles.

MODULAR
The optional post allows the anchor point to be raised, thus overcoming obstacles on the roof.







	EN 795:2012 C · CEN/TS 16415:2013 · AS/NZS 1891.2:2001
	
MAXIMUM NUMBER OF USERS	
LOAD DIRECTION	
TYPES OF APPLICATION	



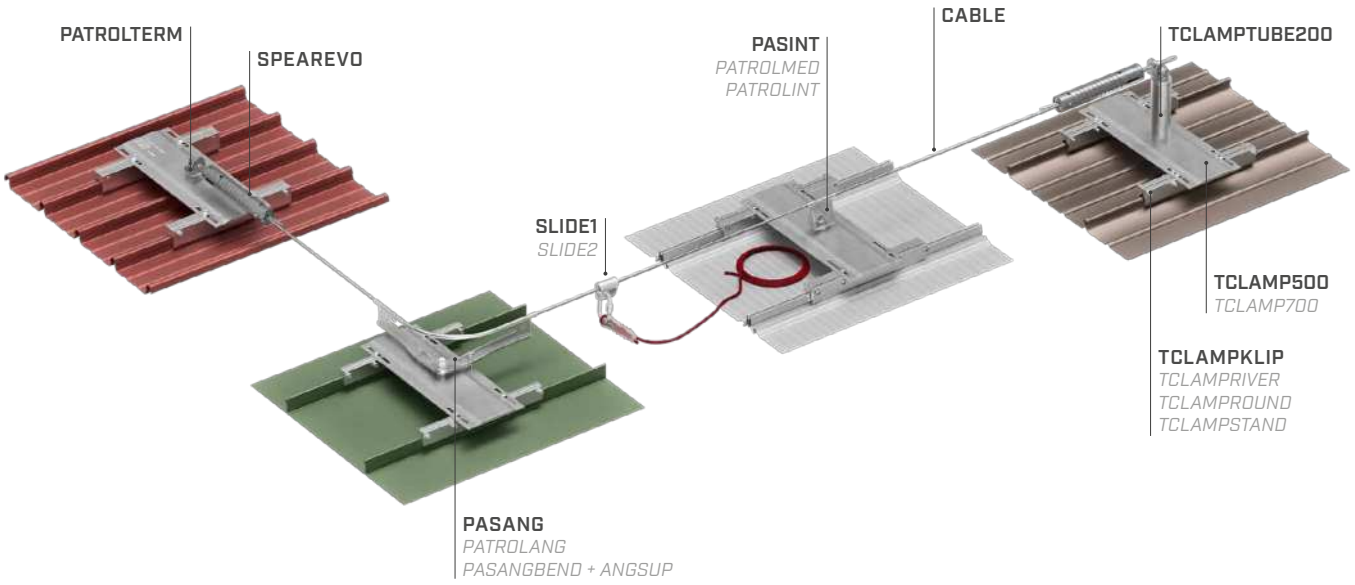PATROL LIFELINE COMPONENTS




T-CLAMP | CODES AND DIMENSIONS

CODE	description	material	B [mm]	H [mm]	L [mm]	pcs	
TCLAMP500	universal plate for small and medium spans between seams	EN AW-6082-T6 alu 6082	190	10	515	1	
TCLAMP700	universal plate for large spans between seams		190	10	760	1	
TCLAMPTUBE200	optional spacer to overcome obstacles	EN AW-6060-T6/ AISI 304 alu 6060 A2 AISI 304	50	200	-	1	
TCLAMPKLIP	fastening clamps set for KLIP-LOK 700® type roofs		43	55	400	1	
TCLAMPRIVER	fastening clamps set for Riverclack type roofs		43	55	400	1	
TCLAMPROUND	fastening clamps set for round standing seam roofs	EN AW-6060-T6 alu 6060	-	-	-	1	-
TCLAMPSTAND	fastening clamps set for standing seam roofs		26	45	400	1	

TECHNICAL DATA*

STANDING SEAM METAL ROOF


substructure		minimum thickness
Fe		0,55 mm
Al		0,7 mm



			SPEAREVO
			EN 795:2012 C / CEN/TS 16415:2013 / AS/NZS 1891.2:2001
users		no.	
minimum span	x_{min}	[m]	2
maximum span	x_{max}	[m]	15
maximum deflection	y_{max}	[m]	3,7

LYSAGHT KLIP-LOK 700® SHEET METAL


substructure		minimum thickness
Fe	Lysaght KLIP-LOK 700 CLASSIC®	0,48 mm
	Lysaght KLIP-LOK 700 HI-STRENGTH®	0,42 mm



			SPEAREVO
			EN 795:2012 C / CEN/TS 16415:2013 / AS/NZS 1891.2:2001
users		no.	
minimum span	x_{min}	[m]	2
maximum span	x_{max}	[m]	15
maximum deflection	y_{max}	[m]	3,7

RIVERCLACK SHEET METAL

substructure	minimum thickness
Al	0,7 mm



			SPEAREVO
			EN 795:2012 C / CEN/TS 16415:2013 / AS/NZS 1891.2:2001
users		no.	
minimum span	x_{min}	[m]	2
maximum span	x_{max}	[m]	10
maximum deflection	y_{max}	[m]	3,0

** The values indicated are the result of experimental tests carried out under the supervision of third parties in accordance with the standards referred to. For a correct calculation report with minimum distances according to the standard requirements, the substructure must be checked by a qualified engineer before installation.*