SNAPSHOOT
ENGINEERED FOR A SAFER TOMORROW

현장을 이해하고, 필요한 솔루션을 연결합니다.

산업안전 · 추락방지 시스템
산업용 소재 · 건축자재
제품 제안부터 공급·시공·설치·교육까지



COMPANY INFORMATION

스냅슛 (SNAPSHOOT)

ADDRESS (15431) 경기도 안산시 단원구 풍전로 37-9 트리플렉스 301동 118호
TEL 0507-1374-9229
FAX 0504-481-6749
E-MAIL bkkim@snapshoot.co.kr

TECHNICAL DOCUMENTS

인증서 · 데이터시트 · 기술자료

제품의 규격과 성능, 인증 및 적용 조건을 확인하기 위한 자료입니다.

ABOUT SNAPSHOOT

제품 공급을 넘어, 현장에 맞는 해결책으로

스냅슛은 산업현장의 작업 환경과 요구 조건을 바탕으로
적합한 제품과 시스템을 제안합니다. 현장 실사를 통해 설치 조건을 확인하고,
공급부터 시공·설치 및 사용 교육까지 필요한 과정을 함께합니다.

추락방지 시스템

안전대부착설비 · 수평·수직 라이프라인
레일 시스템 · 리지드 포스트

밀폐공간 진입·구조 솔루션

데빗암 · 삼각대 · 구조용 윈치
윈치 안전블록 · 구조장비

산업안전 보호구

전신형 안전대 · 랜야드 · 안전블록
작업 환경에 맞춘 개인보호구

산업용 소재·건축자재

산업용 테이프 · 접착제 · 기능성 소재
구조용 스크류 · 목조건축 자재

SNAPSHOOT
ENGINEERED FOR A SAFER TOMORROW

홈페이지 바로가기 →
문서 라이브러리 바로가기 →
시공사례 바로가기 →
문의하기 →

본 페이지는 스냅슛의 자료 제공 안내용 표지입니다. 첨부된 인증서 및 기술자료의 발행 주체, 인증 대상과 적용 범위는 해당 원문을 기준으로 확인해 주세요.

PATROL + SOLID

LIFELINE ON RIGID SUPPORT FOR ROPE ACCESS WORK

DESIGNED FOR ROPE ACCESS WORK

The high-rigidity and high-strength support, combined with the multiple anchor plate, enables rope access work to be carried out comfortably and safely.


LIGHT

The aluminium alloy of the support facilitates handling and installation thanks to the lightweight components.


ADAPTABLE

Support height between 400 and 1000 mm to adapt to different roofing thicknesses.

	EN 795:2012 A+C · CEN/TS 16415:2013 · AS/NZS 1891.2:2001
	
MAXIMUM NUMBER OF USERS	
LOAD DIRECTION	
TYPES OF APPLICATION	

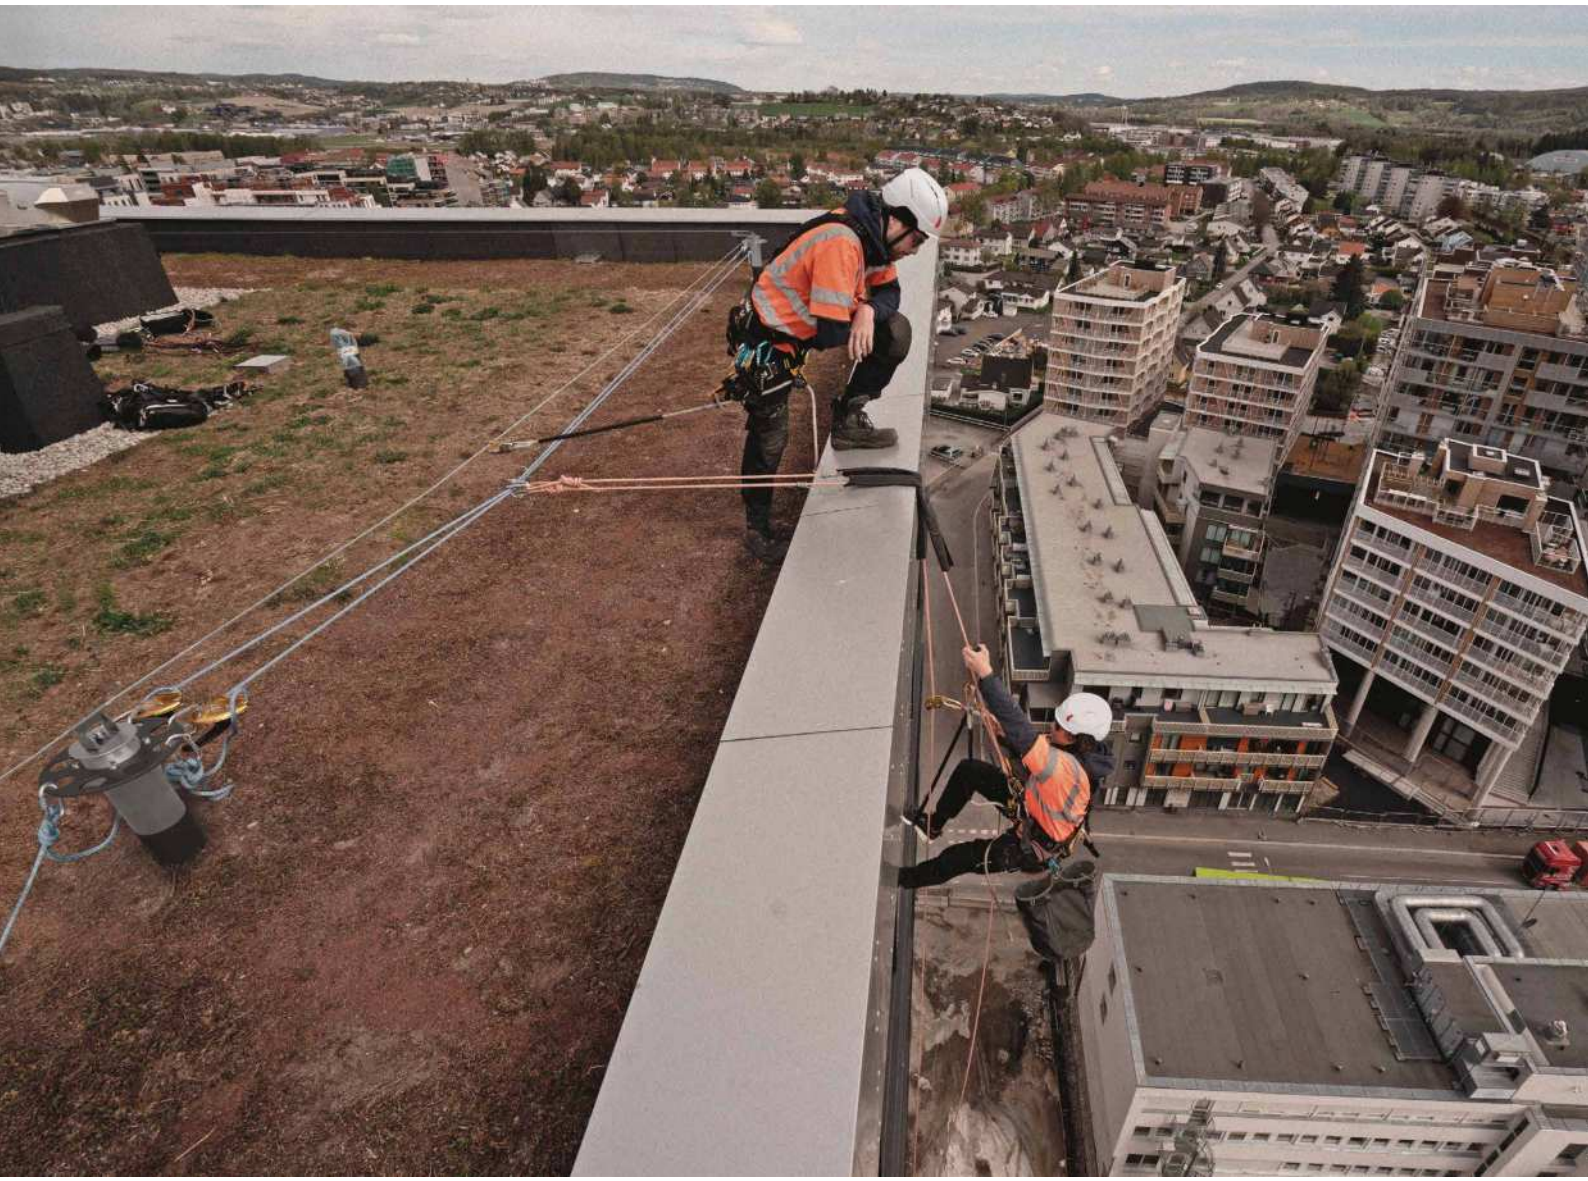

PATROL LIFELINE COMPONENTS

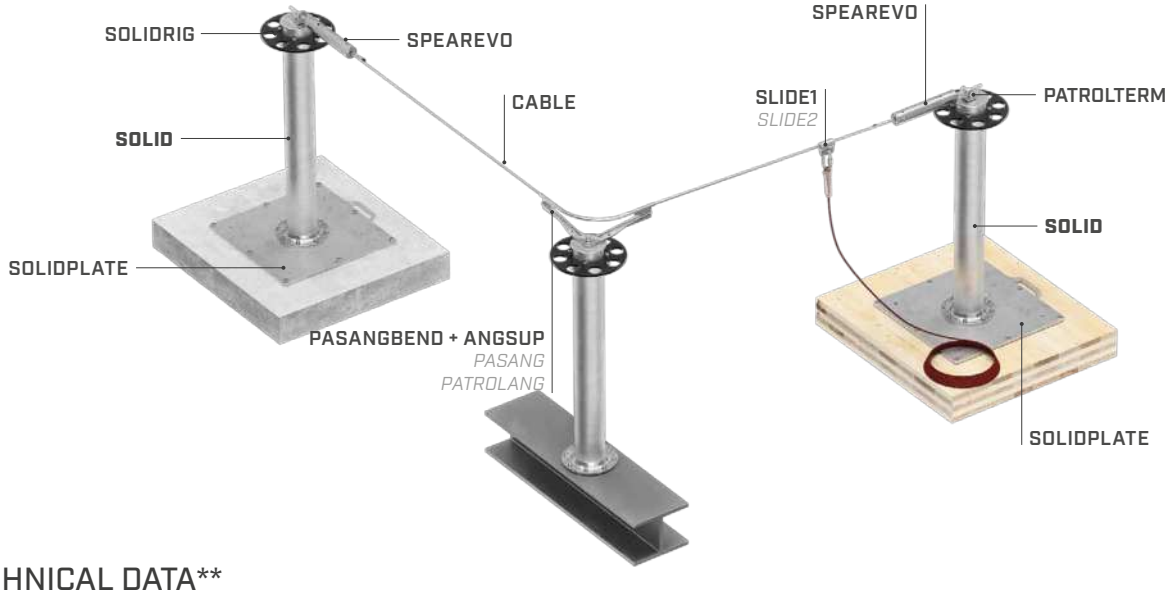


TECHNICAL DATA**

substructure	minimum thickness	fasteners
CLT	160 mm	VGS (EVO) Ø13 HUS12
S235	15 mm	bolt or rod M12 10.9

substructure	minimum thickness	fasteners
C20/25[1][2] (uncracked)	140 mm	AB1 Ø12



[1] *Applicable to EN 795 A and CEN/TS 16415*
[2] *Applicable up to SOLID800.*



			SPEAREVO + SOLID/SOLIDRIG
			EN 795:2012 A+C; CEN/TS 16415:2013; AS/NZS 1891.2:2001
users (system)		no.	
work method			fall protection / restraint (PATROL) suspension (SOLID/SOLIDRIG)
minimum span	x_{min}	[m]	2
maximum span	x_{max}	[m]	10
maximum deflection	y_{max}	[m]	3,35

***The values indicated are the result of experimental tests carried out under the supervision of third parties in accordance with the standard referred to. For a correct calculation report with minimum distances according to the standard requirements, the substructure must be checked by a qualified engineer before installation.*

SOLID | CODES AND DIMENSIONS

CODE	description	material	d_1 [mm]	B [mm]	L [mm]	H [mm]	pcs	
SOLID400	rigid support for rope access work	EN AW-6082-T6 alu 6082	120	220	-	400	1	
SOLID600			120	220	-	600	1	
SOLID800			120	220	-	800	1	
SOLID1000			120	220	-	1000	1	
SOLIDPLATE	bottom plate for timber and concrete		-	550	595	-	1	
SOLIDRIG	multiple anchor plate for rope access work and safety disc	EN AW-6082-T6 black anodised alu 6082	310	-	-	-	1	
SOLIDPLATEFIX	fastening set comprising 8 nuts and 8 M12 8.8 bolts, for fastening SOLID to SOLIDPLATE	A2-70 stainless steel A2 AISI 304	-	-	-	-	1	